exa-PACS · exa-RIS

Exa® PACS/RIS

1.4.31_P6

User's Manual, Alberta

Includes topics on Exa Billing, Exa Mammo, and Exa Trans

© 2023 Konica Minolta Healthcare Americas, Inc.

500-000463A

Table of Contents

Introduction
Symbols 3
Indications for use
Training
Regulatory and compliance
Calibration and measurement accuracy
System requirements
New in 1.4.31_P67
Getting started
Configure your working environment
Work with the hamburger menu
Setup: Configure Exa PACS/RIS 14
Work with the dashboard
Work with the worklist
Work with the Exa PACS/RIS viewer
Work with Advanced Peer Review
Work with Patient Kiosk
Work with the patient chart
Work in the dispatching dashboard
Perform query and retrieve
Work with scheduling
Work with billing
Work with reports
Work with Exa Chat
Work with tools
Work with Patient Portal
Appendix
Reference

Introduction

Symbols

The following symbols may appear in the product documentation or on the product.

Symbol	Symbol Name	Symbol Description	Standard Number and Name	Symbol Reference Number
	Manufacturer	Indicates the name and address of the manufacturer	ISO 15223-1:2021	5.1.1
EC REP	Authorized Representative in the European Economic Area (EEA)	Indicates the Authorized Representative, responsible for the device in the European Economic Area (EEA).	ISO 15223-1:2021	5.1.2
$\sim \sim$	Date of Manufacture	Indicates the date when the device was manufactured.	ISO 15223-1:2021	5.1.3
	Caution	Indicates information that is important for preventing loss of data or misuse of the software.	ISO 15223-1:2021	5.4.4
LOT	Batch Code	Indicates the full Software Release / Version number	ISO 15233-1:2021	5.1.5
SN	Serial number	Indicates the manufacturer's serial number so that a specific medical device can be identified	ISO 15233-1:2021	5.1.7
REF	Catalogue Number	Indicates the manufacturer's catalogue number so that the device can be identified	ISO 15233-1:2021	5.1.6
i	Consult instructions for use	Indicates the need for the user to consult the instructions for use	ISO 15233-1:2021	5.4.3
R Only	Prescription Device	Caution: Federal law restricts this device to sale by or on the order of a licensed healthcare practitioner	21 CFR 801.109(b)(1) Prescription Devices	N/A

BS EN ISO 15223-1:2021 Medical devices - Symbols to be used with information to be supplied by the manufacturer - Part 1: General requirements

Indications for use

EXA[™] is a software device that receives digital images and data from various sources (i.e. CT scanners, MR scanners, ultrasound systems, R/F Units, computed & direct radiographic devices, secondary capture devices, scanners, imaging gateways or other imaging sources). Images and data can be stored, communicated, processed, and displayed within the system and or across computer networks at distributed locations. Lossy compressed mammographic images are not intended for diagnostic review. Mammographic images should only be viewed with a monitor cleared by FDA for viewing mammographic images. For primary diagnosis, post process DICOM "for presentation" images must be used. Typical users of this system are trained professionals, nurses, and technicians.

Training

Users of this software must have received adequate training on its safe and effective use before attempting to operate the product described in this Instructions for Use. Users must make sure they receive adequate training in accordance with local laws or regulations.

Regulatory and compliance

Konica Minolta Healthcare Americas, Inc. 2217 U.S. Highway 70 East Garner, NC 27529 USA

Tel: 1-800-366-5343

Calibration and measurement accuracy

Measurement accuracy partially depends on image quality, which is subject to various factors including the skill of the technologist, the precision of the modalities, and image resolution. However, clinical users of Exa PACS/RIS can help ensure diagnostic image quality and accurate measurements by using appropriate viewer settings (such as window/level and zoom) and by calibrating monitors (see "Calibrate monitors").

The clinical user is responsible to judge the accuracy of the measurements based on the image quality and based on the accuracy of placed measurement points. For a table of measurement accuracies, see "Measurement Accuracy Limits" in the appendix.

Help us improve!

If you find any errors in this manual, would like us to explain something better, or would like us to cover a new topic, please let us know by visiting our online portal.

https://support.kmhapub.com/PremierCustomer/Home.aspx Monitored: 8:00 AM-8:00 PM EST

For urgent issues, please call the Hotline.

System requirements

The following are the minimum system requirements for clients of Exa PACS/RIS. The workstation requirements are based on typical usage scenarios. For the recommended requirements of your specific implementation, contact your Konica Minolta representative.



RECOMMENDED: To avoid loss of functionality and data during a power loss, connect an uninterruptible power supply. When running the system by the UPS alone, save data immediately after modifying. **REQUIRED**: Install anti-virus software on the server and each client.

Server		
Component	Specification	
Processor	Intel® Xeon® Gold 5120 CPU @ 2.20GHz	
Cores	14	
Memory	32 GB	
Archive Storage	1 TB partition DAS 7,200 RPM hard disk drive	
OS	Microsoft Server 2012 R2 (64-bit) C:/ 250 GB SAS mirrored OS drive	
Cache	500 GB SSD	
Database	500 GB SSD	
NIC	Single 1000 MB/s	

Workstation - User

monstation		
Component	Specification	
CPU	ntel® Core™ i5 or later	
RAM	GB or more	
NIC	Single 1000 MB/s	
Storage	HDD, 500 GB or more	
OS	Windows 10 Pro, 64-bit	
Monitor	20 inch, 1600 × 1200	

Workstation – Reading Radiologist

Component	Specification	
CPU	Intel Xeon® E-2176G (3.70 GHz, 12 MB) or later	
Graphics Cards	2 NVIDIA® Quadro® P1000 cards	
RAM	32 GB or more	
NIC	Single 1000 MB/s	
Storage	SDD, 500 GB or more	
OS	Windows 10 Pro, 64-bit	
Monitor	Diagnostic displays	

New in 1.4.31_P6

The following is a partial list of new or updated major features in version 1.4.31_P6. For more information, see the release notes.

- When entering adjustment payments, the payer is no longer erroneously changed to the patient.
- Various back-end improvements, and improvements to performance and the UI.

Getting started

Configure your working environment

Internal and external setup

Configure the language in Chrome

You must configure the browser language of your client computer as follows.

- 1. In Chrome, select the customize [‡] button, and then select **Settings**.
- 2. On the left pane, select Languages.
- 3. If the local language and culture does not appear in the list, select **Add languages**, and then add the language.

Note: The culture must be correct. For example, in Canada, ensure that English (Canada) is installed.

- 4. Select the more actions [‡] button for the local language, and then select the **Display Google Chrome in this language** checkbox.
- 5. Select the more actions [‡] button again, and then select **Move to Top**.
- 6. Select Relaunch.

Sign in to the Exa platform

You can sign in to the main application, the patient portal, the physicians' portal, the ordering facility portal, or the attorney portal.



- 1. In Chrome, go to the URL given to you by your Konica Minolta representative.
- 2. Enter your sign-in credentials.
- 3. Select the **I agree to HIPAA Privacy Notice** checkbox.
- 4. Do one of the following:
 - To sign in to Exa PACS/RIS, select LOGIN.
 - To sign in to a portal, select a portal button.

See also:

About two-factor authentication Sign in using 2FA with email Sign in using 2FA with Google Authenticator

About two-factor authentication

If your facility purchased two-factor authentication (2FA), administrators can use it to increase security by requiring an additional sign-in procedure. During sign-in, Exa PACS/RIS sends a character string called an *authentication token* to your email address, or one is generated by a mobile app called Google Authenticator. You can then enter that authentication token on the Exa PACS/RIS sign-in screen to finish signing in. Administrators: To make two-factor authentication available for a user, you must configure the user's email address.

See also:

Create a user

Edit your user profile Sign in using 2FA with email Sign in using 2FA with Google Authenticator

Sign in using 2FA with email

If your administrator enabled two-factor authentication, you will receive an email from the server with a verification code. Using that code, follow these steps.

- 1. Sign in to Exa PACS/RIS in the usual manner.
- 2. In the **EMAIL VERIFICATION PENDING** box, paste the verification code and select **VERIFY**. Exa PACS/RIS signs you out.
- Sign back in to Exa PACS/RIS, select **REQUEST TOKEN**, type the token sent to the email address, and then select **LOGIN**.
 Note: Every time you sign in the future, you must repeat this step, using a different token each time.

See also:

Sign in to the Exa platform About two-factor authentication Sign in using 2FA with Google Authenticator

Sign in using 2FA with Google Authenticator

After you have signed in using 2FA the first time, you have the option of using Google Authenticator rather than an email token. To use Google Authenticator to sign in, follow these steps.

- 1. Download the Google Authenticator app onto your mobile device.
- 2. In Exa PACS/RIS, on the burger 🔜 menu, select the blue Konica-Minolta 🔤 globe.
- 3. In the **My Profile** dialog, in the **Two Factor Authentication** box, type your sign-in password, and and then select the **Enter** key.
- 4. Select SHOW QR CODE.
- 5. In Google Authenticator, tap **Scan a QR Code**, and then scan the QR code displayed by Exa PACS/RIS.
- 6. In Exa PACS/RIS, in the **One-Time Password** box, enter the code from your new Google Authenticator profile, and then select **VERIFY**.

See also:

About two-factor authentication Sign in using 2FA with email

Reset your password

If you forgot your password, contact your Exa PACS/RIS administrator for instructions on how to reset your password.

Change your password

You can change your sign-in password.

- 1. Select the burger \blacksquare button.
- 2. At the top of the burger menu, select the blue Konica Minolta globe:



3. In the **My Profile** dialog, select **CHANGE PASSWORD**. Enter current and new passwords, and then select **SAVE PASSWORD**.

Add an avatar

An avatar is an image such as a photo that represents you in various parts of the program. **Prerequisites**: Prepare a PNG image to use as the avatar.

- 1. At the top of the burger menu, select the blue Konica Minolta globe.
- 2. In the My Profile dialog, select Choose File.
- 3. Browse for and select your avatar image, and then select **Open**.
- 4. Select **SAVE**.

Edit your user profile

Each user of Exa PACS/RIS has a profile with sign-in credentials and other information. After signing in, you can view and edit your information.

- 1. Select the burger 🔜 button.
- 2. At the top of the burger menu, select the blue Konica Minolta globe or user's avatar:



3. In the **My Profile** dialog, enter the following settings.

Setting	Description	
User Name	Type a user name for sign-in purposes.	
Name	Type your true name.	
Mobile Phone/Email	Type your mobile phone number and/or email address. An email address is required for two-factor authentication.	
Default Device	[Unused]	
Auto Open Dictation on Device	[Unused]	
Default Location	Select a facility as your default location. When you sign in, this facility appears in various parts of the program by default. You must configure the facilities that you want to make available in this dropdown list.	
Always Open Schedule Book in a New Tab	Select to cause the program to open a new browser tab for the schedule book automatically when you open it.	
Rows to Display	Select how many rows to display on the worklist.	
Themes	Select a default theme of Bright (default) or Dark.	

Setting	Description	
Culture	Select the language/culture of the user interface.	
Pin Burger Menu	Select to keep the burger menu open in the left pane of the screen.	
Hide Worklist Icons	Hides the lower toolbar and study row buttons on the worklist. Hidden functions remain available in shortcut menus and other controls.	
Hide Order Menu	Hides the navigation menu within the edit study screen.	
Bandwidth	Select the expected speed of the network on which your client installation runs. This helps to optimize performance in your networking environment.	
Session Interval	Type the number of minutes to elapse before the program times out and returns to the sign-in screen.	
Default Scheduling/Radiology	[Unused]	

4. Select **SAVE**.

View version information

You can view version information about the application, host system, services, and external tools.

- 1. Select the burger \blacksquare button.
- 2. At the bottom of the burger menu, select the white Konica Minolta globe.



Create a shortcut for Exa PACS/RIS

An avatar is an image such as a photo that represents you in various parts of the program. **Prerequisites**: Prepare a PNG image to use as the avatar.

- 1. At the top of the burger menu, select the blue Konica Minolta globe.
- 2. In the **My Profile** dialog, select **Choose File**.
- 3. Browse for and select your avatar image, and then select **Open**.
- 4. Select SAVE.

Calibrate monitors

Especially after a new installation or upgrade, you can use Exa PACS/RIS to calibrate your monitors to ensure accuracy of length and other measurements. If all images you work with contain pixel spacing information, you can skip this procedure.

Prerequisite: Enter Calibration Width and Calibration Height settings for your monitors.

- 1. Open an image in the viewer.
- 2. Optional: For higher accuracy, on the image shortcut menu, select **View** > **Actual Image Size**.
- 3. Hover over the upper-right corner of a frame, right-click \blacksquare , and then select **Recalibrate**.
- 4. Select two points on the image.
- 5. In the **Dialog** dialog, type the length between the points and then select **OK**.

Note: If prompted to apply calibration to the series, select **OK**. **Results**

- The calipers are modified.
- Previously annotated measurements are redrawn.
- Future measurements will appear according to the new calibration values.

See also:


Set up connected displays

Work with the hamburger menu

The hamburger (burger) menu is the main menu of the program. To open it, select the burger menu button circled in red in the following figure.

	Norklist		
	PRE ORDERS	QC	ALL
< _			

L



The burger menu button...

...and menu

Setup: Configure Exa PACS/RIS

Before using Exa PACS/RIS, you must configure settings and information used in various parts of the program. This section helps with the most common areas of basic configuration. For help with other detailed settings, contact your Konica Minolta representative.

Configure your company

Company settings include basic information such as name and address, but also include a range of preset options for items such as: sex, body parts, and ethnicity; patient alerts, critical findings, and cancellation reasons; MRN and accession number formats; passwords; and fee modifiers. To configure your company:

- 1. On the burger 🔲 menu, select **SETUP**.
- 2. Next to the burger button, select the word in all caps, and then select Office.
- 3. On the **COMPANY** tab, enter the following settings.

Setting	Description	
Code	Type your internal code for your institution.	
Name	Type the name of your institution.	
Timezone	Select the time zone used by your institution.	
Enable LDAP	If your institution uses an LDAP or Active Directory server, select this option to display the LDAP CONFIG sub-tab, and then see "Configure all LDAP settings."	
Enable RCopia Service	Select to turn on the RCopia service, if available, and display the RCOPIA CONFIG tab. Enter settings in the tab, and then select SAVE CONFIG .	
Enable Payment Gateway	Select to turn on the Payment Gateway service, if available, and display the PAYMENT GATEWAY tab. Enter settings in the tab, and then select SAVE.	
Trigger Routing on Study Flag Changed	Select to reprocess routing (DICOM transactions) automatically when a user changes a study flag.	

- 4. Select **SAVE**.
- Enter additional information as needed by following the steps in later subsections.
 Note: When finished, select SAVE again at the top of the screen on the right side of the Trigger Routing on Study Flag Changed checkbox.

Configure gen<u>eral</u> settings

- 1. On the burger 🔲 menu, select **SETUP**.
- 2. Next to the burger button, select the word in all caps, and then select **Office**.
- 3. On the **COMPANY** tab, on the **GENERAL** sub-tab, enter the following settings.

Setting	Description	
Contact Information	Enter the company address and contact information.	
Scheduling	Highlight new Patient exams on	Select to highlight new patient appointments on the schedule book for easier identification.

Setting	Description	
	ScheduleBook	
	Highlight Color	Select the color to use to highlight new exams on the schedule book.
	Default Distance from ZIP Code	Select the default distance for finding facilities near patients.
	Enable schedule rule reason	Select to require users to select a schedule reason when creating a schedule block.
	Enable reschedule reason	Select to prompt for a reason when rescheduling an appointment.
	Enable pause reason	Select to prompt for a reason when a technologist pauses an exam.
Billing Information	Corporate Office Type	Select Person for an individual practice. Otherwise, select Non-Person Entity.
	EDI Submitter ID	[Not used in Alberta]
	EDI Receiver ID	[Not used in Alberta]
	Modifiers in Order	Forces the user to enter modifiers before creating an order.
Documents	File Store	Select a file store for scanned documents at your company. This is separate from the file store used by AEs to store images.
Security	Account Lockout Threshold	Set the maximum number of sign-in attempts.
Viewer	Viewer Titlebar Text	Select to display the patient name or the accession number on the title bar when opening a study in the viewer.
Patient Portal	[checkboxes]	Select which demographics to display in the patient portal.
Peer Review	Schedule (how often studies are assigned to be peer-reviewed)	Select the frequency of assignment.
	Cron custom settings	Available when you select Custom settings in the Schedule dropdown list. Type a custom frequency for assigning peer reviews.
	Peer Review Percentage of yearly approvals	Type the percentage of studies to be assigned annually for peer review.
	Studies per draw amount	Type how many studies to assign per reviewer, per draw.

Setting	Description	Description	
	Cutoff period	The number of days in the past from which Peer Review will draw studies.	
	Interval	Type how often to run the peer review background service.	
Email Information	Server Address	Type the address of your outgoing SMTP/mail server.	
	Port	Type the mail server port number.	
	User Name	Type the account administrator user name (or email address).	
	Password	Type the email administrator password.	
	Sender Address	Type the default sender address.	
	Email Subject	Type a default email subject.	

4. Select **SAVE ALL INFO**.

Configure settings

Settings here means presets that appear as options in other parts of the program.

- 1. On the burger menu, select **SETUP**.
- 2. Next to the burger button, select the word in all caps, and then select **Office**.
- 3. On the **COMPANY** tab, on the **SETTINGS** sub-tab, in the list on the left side of the screen, select one of the settings in the following table.
- 4. At the bottom of the screen, in the **Description** box, type a setting, and then select **SAVE.**

Setting	Description
User Titles	User prefixes, such as Mr., Mrs., and Dr.
Marital Status	Patient marital statuses, such as Single, Married, and Divorced.
Sex	Patient sexes.
Body Parts	Patient body parts under examination.
Employee Status	Statuses of employees at your institution.
Credentials	Physician credentials, such as Ph.D. and M.D.
Racial Identity	Patients' self-identified races.
Ethnicity	Patients' self-identified ethnicities.
Relationship	Relationships of people to patients (including self).
Priorities	Priorities that can be assigned to studies in the worklist. These are separate from STAT levels.
Sources	Sources of patient arrivals, such as clinic referral, attorney office, hospital transfer, or emergency room.
Orientation	Lateralities as they pertain to the study.

Setting	Description
Languages	Patients' preferred languages.
Communication Preferences	Patients' preferred methods of communication, such as cell phone or email.
Administration Site	Immunization modes.
Regions	Geographical regions, such as for grouping markets.
Units of Measure	Units of measure, such as for doses of medication or contrast material.
Needle Gauge	Type a gauge to use, and then select SAVE.

Configure app settings

Settings here means presets that appear as options in other parts of the program.

- 1. On the burger menu, select **SETUP**.
- 2. Next to the burger button, select the word in all caps, and then select **Office**.
- 3. On the **COMPANY** tab, select the **APP SETTINGS** sub-tab.
- 4. In the list on the left side of the screen, select one of the settings in the following table.
- 5. At the bottom of the screen, in the **Description** box, type a setting and select **SAVE.**

Setting	Description
States	States, provinces, prefectures, or other regions.
Scan Document Types	Descriptions to assign to documents to be scanned, such as "Photo ID" or "Explanation of Benefits."
Stat Levels	Descriptions for each of the STAT levels (0–5). You can also assign a background color and text color to easily identify the STAT level on the worklist and elsewhere.
ТАТ	Descriptions of each TAT. Select the edit icon of a TAT to modify its description, text color, and background color. You can set the max TAT for a facility under Setup > Office > Facility.
Patient Arrival Wait Times	Color-coded descriptions corresponding to lengths of time that a patient waits upon arrival. These bands of time appear in the wait time monitor at the top of the Patient Arrival Worklist.
Access Reasons	Reasons for accessing confidential patient records when using the Break the Glass function.
Ordering Facility Type	Descriptions such as Skilled Nursing Facility, Assisted Living, and Hospice.

Configure reason codes

Reason codes are text strings that identify reasons for taking various actions such as cancellations, follow-ups, and rescheduling. You can pre-configure them for use in various parts of the program.

- 1. On the burger 🔲 menu, select **SETUP**.
- 2. Next to the burger button, select the word in all caps, and then select **Office**.
- 3. On the **COMPANY** tab, on the **REASON CODES** sub-tab, select a category.

- 4. Optional. If configuring a Pause reason (reason for technologist pausing an exam), select the **Required** checkbox to require the technologist to select a reason.
- 5. In the dialog, select **ADD**, type a reason code, and select the save button.
- 6. Select anywhere outside of the dialog to close it.

Configure the <u>MRN</u> format

- 1. On the burger menu, select **SETUP**.
- 2. Next to the burger button, select the word in all caps, and then select Office.
- 3. On the **COMPANY** tab, on the **MRN INFORMATION** sub-tab, enter the following settings and then select **SAVE.**

Setting	Description
MRN Type	Select Default to use the default format included with Exa PACS/RIS, or Custom to define your own format.
Prefix	Type a prefix to prepend to the MRN. To be able to modify the prefix, select Can Edit.
Suffix	Type a suffix to append to the MRN.
Allow Duplicates	Select to allow duplicate MRNs.
Prefix/Suffix Max.	Select Fixed Length (above), and then type or select the maximum length of the MRN prefix and suffix.
Fixed Length	Select to specify a maximum length of the MRN.

Configure the accession number format

- 1. On the burger 🔲 menu, select **SETUP**.
- 2. Next to the burger button, select the word in all caps, and then select **Office**.
- 3. On the **COMPANY** tab, on the **ACCESSION INFORMATION** sub-tab, enter the following settings and then select **SAVE**.

Setting	Description
Prefix	Type a prefix to prepend to the accession number.
Suffix	Type a suffix to append to the accession number.

Configure AE filters

Use these settings to restrict the AE titles, IP addresses, and institutions that are associated with your company in other parts of the program.

- 1. On the burger menu, select **SETUP**.
- 2. Next to the burger button, select the word in all caps, and then select **Office**.
- 3. On the **COMPANY** tab, on the **AE FILTER** sub-tab, in each box, type an item and then select the plus + button.

Setting	Description
AE Title	Add an AE title.
IP	Add an IP address.

Setting	Description
Institution	Add an institution.

Configure HL7 filters

- 1. On the burger 🔲 menu, select **SETUP**.
- 2. Next to the burger button, select the word in all caps, and then select **Office**.
- 3. On the COMPANY tab, on the HL7 sub-tab, enter the following settings and then select SAVE.

Setting	Description
Receiving Facilities	Add a facility that can receive HL7 messages, and then select ADD .
Send Ack	Select to send an acknowledgement upon receipt of an HL7 message.

Configure pas<u>sw</u>ord options

- 1. On the burger 🔲 menu, select **SETUP**.
- 2. Next to the burger button, select the word in all caps, and then select **Office**.
- 3. On the **COMPANY** tab, on the **PASSWORD MGT.** sub-tab, enter the following settings and then select **SAVE.**

Setting	Description	
Password Must Be between…	Type a minimum and maximum r passwords can contain.	number of characters that
Passwords Must Contain …	Uppercase Letters	Exa PACS/RIS validates
	Lowercase Letters	passwords based on these selections.
	Numbers	
	Symbols or Special Characters	
'User Must Change Password Next Login' Is Checked by Default	Select or clear to assign the defa	ult state of the setting.
Force Users to Reset Their Password on a Set Schedule	Select to require password resets	s of a specified interval.
Apply Password Requirements to Patient Portal	Select to use the same password accounts.	requirements for Patient Portal

Add a market

You can add regional markets for use in other parts of the program, such as for assigning facilities.

- 1. On the burger 🔲 menu, select **SETUP**.
- 2. Next to the burger button, select the word in all caps, and then select **Office**.
- 3. On the **MARKET** tab, select **ADD**, and then enter the following settings.

Setting	Description
Code	Type your internal code for the market.
Name	Type the name of the market.
Region	Select the geographical region in which the market is located.

4. Select **SAVE**.

Add a facility

You must add at least one facility to your institution.

- On the burger menu, select SETUP.
 Next to the burger button, select the word in all caps, and then select Office.
- 3. On the **FACILITY** tab, select **ADD**.
- 4. Enter the following settings for the facility.

Setting	Description
Code	Type your internal code for the facility (up to eight characters).
Name	Type the name of your facility.
Market	Select the market that the facility serves.
Facility Number	Type the Alberta Health facility number.
Business Arrangement Number	Type the Alberta Health business arrangement number of the facility.
Functional Centre	Type the Alberta Health functional centre code.
Functional Centre Required on Claim	Type the Alberta Health functional centre code that is required on claims.
Contact No.	Type the phone number of the primary contact person at the facility.
Fax No.	Type the fax number for receiving approved reports.
Send Reports to Fax No.	Select to automatically send reports to the fax number you entered previously.
Email	Type the email address of the primary contact at the facility.
Email Report Link	Select to automatically send an email when a report is created to the email address entered earlier that contains a link to view the reports on the ReportLink service.
Report Password	Type the password needed to view reports on ReportLink.
Email Attachment	Select to receive reports by attachment.
Timezone	Select the time zone used by your facility.
Mammo License ID	Type the facility's mammography license ID.
Max TAT	Type the maximum allowed turnaround time, in minutes, before a breach of contract occurs.

Setting	Description	
Enable Alt. Acc. No.	Select to use of more than one account number for a patient.	
Required SSN	Select to require a social security number to provide treatment.	
Require Primary Phys.	Select to require a primary physician's information to provide treatment.	
PokitDok Response	[Unused]	
Alberta WDFA	Type the WDFA number for Netcare.	
Updox Account ID	Type your ID for signing in to Updox.	
Send fax via Updox	Select to use Updox to send faxes.	
Upload Logo	Select Choose File, browse for and select a logo file for the facility, and then select Open. Logo files can be in JPEG or PNG format.	
Remove Logo	To remove the current logo, select REMOVE LOGO.	
[Address]	Type the address of the facility.	
Modality Display Width	Type the column width for each modality room, in numbers of pixels.	
File Store	Select the default file store to use at the facility.	
Show Patient Alerts	Select to show a patient alert window when scheduling in the schedule book.	
Show Recent Schedules	Select to display the recent schedules dialog when: 1) scheduling a pre-order; and 2) double-selecting a patient in the Patient tab of the New Appointment screen. Days: Type the number of days in the past and future to control which exams appear in the recent schedule screen.	
Enable Veterinary Registration	Select to be able to register veterinarians as physicians.	
Mobile Rad Dispatching Address	Type the address of the office that dispatches mobile radiology.	
Do Not Allow Overlapping Procedures to Be Scheduled	Select to prevent users from scheduling more than one procedure in the same time slot in the schedule book.	
Import Documents into Study as DICOMs	Select to automatically convert documents to DICOM images before importing. If not selected, the user can select whether to convert at the time of import.	
Global Auto-Print	Select to automatically send radiology reports to printer that is configured on the Exa server.	
Abbreviated Receipt	Select to use an abbreviated format for payment receipts.	
Custom Receipt	Select to use a custom receipt for payments, such as co-pays.	

Setting	Description	
Exclude from All Portals (All Portals & Break the Glass)	Select to exclude studies associated with the facility from portals and the Break the Glass functions.	
Required Fields at Scheduling	Select one or more fields to require.	
Required Fields for Creating a Preorder	Select one or more fields to require.	
Study Status When Patient Arrives	Select the status to assign to the study when the patient arrives at check-in.	
Study Status When Patient in Room	Select the status to assign to the study when the patient arrives in the exam room.	
Report Delay to Patient	Type the number of days to wait before making reports available on the patient portal.	
Formal Name	Type the formal name of the facility, if different from the commonly used name.	
Facility Notes	Type notes specific to the current facility.	
MRN Information: Inherit	Select to copy the MRN from the EMR of origin.	
Other MRN settings	See "Configure the MRN format."	
The following settings becom	ne available after you save.	
Group Number	Type the group number of the facility.	
Enable Insurance Eligibility	Enables verification of insurance eligibility.	
Enable Insurance Claims	Enables claims at the facility.	
Master Number	Type the master number of the facility.	
Prof Group Number	Type the professional group number of the facility.	
Default Billing Provider	[Fixed value].	
Service Facility	[Not used in Alberta]	
POS/SLI	[Not used in Alberta]	
Prof. SLI	The SLI code used for professional fees in Ontario.	
Fee Schedule	Select the fee schedule for the facility.	
Rendering Provider	The primary radiologist at the facility.	

5. Select **SAVE & CLOSE**.

Add modalities

You must set up each modality available to your facility or institution in Exa PACS/RIS. In particular, you must add modalities before entering DICOM settings.

Do not add non-DICOM modalities, as this could result in problems sending studies to external

PACS.

- 1. On the burger 🔲 menu, select **SETUP**.
- 2. Next to the burger button, select the word in all caps, and then select **Office**.
- 3. On the **MODALITY** tab, select **ADD**.
- 4. In the add/edit modality screen, enter the following settings.

Setting	Description	
Code	Type the standard DICOM modality code. For example, for ultrasound, type US.	
Name	Type a unique name for the modality.	
Hidden on Physician Portal	Select to hide the modality name on the physician portal to prevent unwanted scheduling. Useful for hiding non-scheduled modalities such as SR.	

- 5. Select **SAVE**.
- 6. In the list of modalities, select the ^O ^O buttons to order the new modality. **Note**: During modality-related tasks, Exa PACS/RIS matches modalities by the order in the list. Therefore, for example, you should list MG before SR.

Add modality rooms

Modality rooms are named locations where modalities are used for exams. You can add modality rooms for your institution for use in scheduling exams.

Prerequisite: Configure at least one modality, facility, and DICOM modality worklist.

- 1. On the burger 🔲 menu, select **SETUP**.
- 2. Next to the burger button, select the word in all caps, and then select **Office**.
- 3. On the **MODALITY ROOM** tab, select **ADD**.
- 4. Enter the following settings.

Setting	Description	
Code	Type your internal code or name for the modality room.	
Facility	Select the facility where the modality room is located.	
Name	Type a name for the modality room.	
From Date/To Date	Select the dates of operation.	
Color Code	Select in the box, and then select a color from the picker to assign to the modality room. The color appears in a bar below the name of the modality room in the schedule book.	
Display Order	Type a number to determine the horizontal display position of the modality room in the schedule book. Lower numbers appear on the left side of higher numbers.	
Modalities	Select all modalities that are in use in the modality room.	
DMWL	Select the AEs in the room to which to serve the worklist. Only the selected AEs will receive orders for that room.	

5. On the **MODALITYTIMES** sub-tab, enter settings as needed.

- 6. On the **LINKED RESOURCES** sub-tab, select which treatment resource is associated with the modality room (Technologist or mobile rad Vehicle), and then type or select the name of the resource.
- 7. Select **SAVE**.

Add a group chat room

In a screen outside of Exa Chat, you can create group chat rooms, manage members of the rooms, and specify who can find the group chat rooms in order to join them.

- 1. On the burger 🔲 menu, select **SETUP**.
- 2. Next to the burger button, select the word in all caps, and then select **Office**.
- 3. On the CHAT GROUP ROOM tab, select ADD.

Setting	Description
Room Name	Type a name for the room.
Users	Select the members of the group chat room.
Available to	Select users that can find the group chat room when searching for a room to join.

Add a notification

You can pre-configure notifications to appear on the dashboard and/or portal sign-in pages under "Organizational News."

Prerequisite: Add at least one facility.

- 1. On the burger \blacksquare menu, select **SETUP**.
- 2. Next to the burger button, select the word in all caps, and then select **Office**.
- 3. On the **NOTIFICATION** tab, select **ADD**.
- 4. Enter the following settings.

Setting	Description	
Title	Type a title for the notification.	
Show on Provider Portal Login	Select to display the notification on the sign-in page of the physician portal.	
Show on Attorney Portal Login	Select to display the notification on the sign-in page of the attorney portal.	
Description	Type the body of the notification.	
Office Location	Select one or more facilities to which to send the notification.	

5. Select **SAVE**.

Add tasks

Administrators can add tasks for marketing representatives, such as "Tell referring physician offices that we will start offering 3D mammography in January."

- 1. On the burger 🔜 menu, select **SETUP**.
- 2. Next to the burger button, select the word in all caps, and then select **Office**.
- 3. On the TASKS tab, select ADD.
- 4. Enter the following settings.

Setting	Description
Title	Type a title for the task.
Description	Type a description of the task.
Due Date	Select a due date for the task.
Completed	Select when the task is completed.

5. Select SAVE.

Add authorization rules

Authorization rules prevent you from scheduling an exam on a date sooner than the amount of time required to obtain insurance authorization. Adding a rule automatically adds a warning (red star) to studies on the worklist that are awaiting authorization.

Prerequisite: Configure at least one procedure code and insurance provider.

- 1. Optional. To filter the list of rules, in the **Facility** dropdown list, select a facility.
- 2. On the burger 🔲 menu, select **SETUP**.
- 3. Next to the burger button, select the word in all caps, and then select **Office**.
- 4. On the **EXAM AUTHORIZATION** tab, select **ADD**.
- 5. In the **Add Authorization Rule** dialog, configure the following settings.

Setting	Description	
Facility	All facilities are selected by default. To select individual facilities, select Choose facilities , and then select one or more facilities in the dropdown list.	
Modality	Select one or more modalities to which to apply the authorization rule.	
Days	Type the minimum number of days before an exam that it must be scheduled.	
Allow Scheduling	Select to allow users to schedule exams that are currently unauthorized, but that can be authorized in the future. Gives the user the option to schedule the exam, create a pre-order instead, or cancel.	
Service Codes	Select NONE SELECTED, and then use the search bar to find and select one or more procedure codes. The authorization rule only applies to the procedures you select.	
Insurance Providers	Select NONE SELECTED, and then use the search bar to find and select one or more insurance providers. The authorization rule only applies to the providers you select.	

6. Select **SAVE.**

See also:

Manually authorize an exam

Create a study flag

You can create a study flag that users can apply to studies and orders on the worklist. Sorting the worklist by flags is one way for users to easily find groups of studies or orders to work on. You can also use them to trigger routing rules. When you create a study flag, you specify its scope of availability by institution, facility, modality, and other parameters.

- 1. On the burger \blacksquare menu, select **SETUP**.
- 2. Next to the burger button, select the word in all caps, and then select **Office**.
- 3. On the **STUDY FLAG** tab, select **ADD**.
- 4. In the **Description** box, type a name for the flag.
- 5. Enter the following settings.

Setting	Description	
Available in Portal	Select to make the flag available in the physicians' portal. If selected, all other settings become unavailable.	
View Study Flag on Schedule Book	Select to show any study flags added to a study on the pointment card in the schedule book.	
Color Code	Select a color in the picker. This color appears in the Study Flag column in the worklist.	
Institutions	Select the institutions for which the study flag is available.	
Facilities	Select the facilities for which the study flag is available.	
Modalities	Select the modalities for which the study flag is available.	

6. Select **SAVE.**

Set monthly goals

You can set monthly goals for the number of studies to perform, for example.

- 1. On the burger 🔲 menu, select **SETUP**.
- 2. Next to the burger button, select the word in all caps, and then select **Office**.
- 3. On the MONTHLY GOALS tab, select ADD.
- 4. Enter the following settings.

Setting	Description	
Modality	Select the modality for which to set a goal.	
Goal Period	Select the month for the goal.	
Monthly Goal	Type the target number of studies to perform with the selected modality.	
Working Days per Month	Type the number of days in the selected month.	

5. Select **SAVE.**

Configure macro notes

Macro notes are pre-configured blocks of text and metadata that you can add as notes to items in various parts of the program such as studies, schedules, and claims. Configuring macro notes ahead of time saves you from having to re-enter the same notes on multiple occasions.

- 1. On the burger 🔲 menu, select **SETUP**.
- 2. Next to the burger button, select the word in all caps, and then select Office.
- 3. On the MACRO NOTES tab, select ADD.
- 4. Enter the following settings.

Setting	Description	
Description	Type a short description for the macro note to appear as the selectable option when adding notes in other parts of the program.	
Macro Types	Select the context in which the macro note is available.	
Facilities	Select the facilities where the macro note is available.	
Modalities	Select the modality with which the macro note is available.	
Edit Appointment Types	Select to add or remove the appointment types for which the macro note is available.	
Macro Text	Type the text of the macro note.	

5. Select **SAVE**.

Configure portal links

You can add up to two custom links to the patient, provider, or attorney portal. For example, you could add a link to the patient portal that sends your patients to your company's payment website.

- 1. On the burger 🔲 menu, select **SETUP**.
- 2. Next to the burger button, select the word in all caps, and then select Office.
- 3. On the **PORTAL CONFIGURATIONS** tab, select a portal sub-tab, and then enter the following settings.

Setting	Description
Label	Type the link text that appears to the user. For example, ${\tt Pay}_{\tt Now.}$
Link	Type the URL. For example, https:/ \www.ourcompname.com\customer_payment_site

4. Select **SAVE**.

Require document review

When creating a scan document (or "document") type, you can specify to require that users review the document before moving forward in the study workflow. For example, you can require technologists to review physician orders prior to performing an exam to ensure order accuracy.

- 1. Add a scan document type (see "Configure app settings").
- 2. Select your document type, and then select the **Requires Review** checkbox.
- 3. Add a study status.

4. Edit the study status, select the **Document Review** checkbox, and then select the document types to review.

See also:

Configure your company Configure study statuses

Configure all LDAP settings

Enable LDAP

You can set up a connection to an Active Directory/LDAP server and synchronize users between the Exa PACS/RIS database and the LDAP server.

- 1. On the burger 🔲 menu, select **SETUP**.
- 2. Next to the burger button, select the word in all caps, and then select **Office**.
- 3. On the **Company** tab, select **Enable LDAP**.
- 4. On the **LDAP CONFIG**. sub-tab, under **Active Directory Server**, type the server address and other settings.
- 5. Under **Credentials**, type user credentials to sign in to the **LDAP server**.
- 6. Under **User Synchronization**, specify whether and how often to synchronize the Exa PACS/RIS database with the LDAP server.
- 7. Optional: To confirm your connection settings, select CHECK CONNECTION.
- 8. Optional: To synchronize servers manually, select SYNCHRONIZE.
- 9. Select **SAVE LDAP CONFIGURATION**.

About AD synchronization

Synchronize AD users and groups to ensure that the Exa PACS/RIS server has the same AD users and groups as the LDAP server. With regard to groups, a user can only be a member of one Exa PACS/RIS-related AD group at a time. The following examples illustrate how group synchronization works.

Example 1

Before synchronization	Change	After synchronization
User 1 in LDAP group A User 1 not in LDAP group B	Add user 1 to LDAP group B	User now in LDAP group B
User 1 in Exa PACS/RIS group A Exa PACS/RIS has no group B	-none-	No change

Example 2

Before synchronization	Change	After synchronization
User 1 in LDAP group A User 1 not in LDAP group B	Move user 1 from LDAP group A to LDAP group B	User now in LDAP group B
User 1 in Exa PACS/RIS group A Exa PACS/RIS has no group B		User is removed from group Exa PACS/RIS group A, but can be added back.

Synchronize AD groups

To synchronize AD groups with the LDAP server:

- 1. On the burger 🔜 menu, select **SETUP**.
- 2. Next to the burger button, select the word in all caps, and then select **User Management**.
- 3. On the AD GROUPS tab, select SYNC. AD GROUPS.
- 4. In the left pane, select the groups that you want to synchronize (add to the server).
- 5. Select **CREATE SELECTED GROUPS**.

Synchronize AD users

To synchronize AD users with the LDAP server:

- 1. On the burger 🔜 menu, select **SETUP**.
- 2. Next to the burger button, select the word in all caps, and then select **User Management**.
- 3. On the AD USERS tab, select SYNC. AD USERS.
- 4. In the left pane, select the users that you want to synchronize (add to the server).
- 5. Select **CREATE SELECTED USERS**.

Optimize LDAP for large numbers of query results

By default, windows returns a maximum of 1000 objects in response to an LDAP query, but you can increase this number. This can be useful when importing bulk accounts or other objects from Active Directory by using Adobe Connect or other means.

Find the fully qualified domain name (FQDN)

- 1. On the LDAP server, in **Control Panel**, select **System and Security** > **Administrative Tools** > **Active Directory Domains and Trusts**.
- 2. In the left pane of the **Active Directory Domains and Trusts** dialog, under **Active Directory Domains and Trusts**, find the FQDN for the computer or computers.
- 3. Keep this information for use in the next procedure.

Set parameters

- 1. On your LDAP domain controller, at the command prompt, sign in as the domain administrator.
- 2. Type NTDSUTIL, and then select ENTER.
- 3. At the ntdsutil: prompt, type ldap policies.
- 4. At the ldap policy: prompt, type connections.
- 5. At the server connections: prompt, type connect to server <FQDN of domain controller>.
- 6. When the connection is open, type q.
- 7. At the ldap policy: prompt, type show values to view the current MaxPageSize value.
- 8. To change the value, type: set MaxPageSize to 30000.
- 9. Optional. To confirm your in-progress change, type: Show Changes.
- 10. To commit the change, type: commit changes.

Configure providers and resources

You can set up individual healthcare providers, their groups and facilities, and provider pay schedules.

Configure an ordering facility

You can configure a facility at your institution to be able to submit electronic orders for exams. The orders submitted appear on the PRE ORDERS tab of the worklist for scheduling.

- 1. On the burger 🔜 menu, select **SETUP**.
- 2. Next to the burger button, select the word in all caps, and then select **Providers & Resources**.

3. On the **ORDERING FACILITY** tab, select **ADD**, and then enter the following information.

Description	
Type your internal facility code.	
Type the Alberta Health facility number.	
Type the name of the facility.	
Select the market served by the facility.	
Type or select the address and country or region of the facility.	
Type the contact information for the facility.	
Select the checkboxes to indicate whether and how to receive approved reports.	
Type the password that the ordering facility must use to view reports generated from exams that they ordered.	
Select a map to the place of service, such as Google Maps.	
Type the Medicare provider number of the facility.	
Type the clinical laboratory improvement amendments number of the facility.	
Type notes for the ordering facility.	
Select the Medicare provider agreement code of the facility.	
Select the entity identifier code of the facility (refer to the USHIK).	
Type the employer identification number of the facility.	
Type the state medical license number of the facility.	
Type the ETIN to allow electronic transfers.	
Type the federal tax ID of the facility.	
Type the Medicaid provider number.	
The Medicare/Medicaid taxonomy code (refer to CMS.gov).	
If there is only one healthcare provider at the facility, type the unique physician identification number of the provider.	
If there is only one healthcare provider at the facility, type the ULI or HSN of the provider, if available.	
[unused in Alberta]	
Select a fee schedule from the dropdown list. To add fee schedules, see "Configure a fee schedule."	

Setting	Description	
Locations/Contacts	Select the providers associated with the ordering facility.	

4. Select **SAVE & CLOSE**.

Locations/Contacts

See, "Add a location or contact to an ordering facility."

Providers

To view the providers at the ordering facility, select the **PROVIDERS** sub-tab.

Summary

To generate summaries of patients and studies at the ordering facility, select the **SUMMARY** sub-tab.

Setting	Description
Patients/Study	Select whether display patients or studies in the ordering facility summary report.
From Date/To Date	Enter a date range for the summary report.

• Select **GO** to view the summary report.

Marketing Rep

To configure a marketing rep. for the ordering facility, select the **MARKETING REP**. sub-tab.

Setting	Description
Marketing Rep.	Select the marketing representative for the facility.
Inherited From	If inherited, enter the contact information of the origin.

1. Select SAVE.

- 2. In the **Notes**, **Follow-Ups/Tasks**, and **Contracts** areas, select **ADD** to add the corresponding items to the marketing rep.
- 3. In the Patient Documents area, select UPLOAD to upload documents.

Login Details

You can link users who can sign in to the ordering facility portal, and assign sign-in credentials.

- 1. On the **LOGIN DETAILS** sub-tab, select a user and then select **LINK USER**.
- 2. Optional. To add a new user, enter credentials and select **CREATE USER**.

Linked Resources

To link technologist or vehicle resources to the ordering facility, select the **LINKED RESOURCES** subtab.

Setting	Description	
Technologist	Select a technologist to link.	
Vehicle	Select a vehicle to link.	

Import an ordering facility

If you obtain exported <u>fac</u>ility information you can import those facilities.

- 1. On the burger 🔲 menu, select **SETUP**.
- 2. Next to the burger button, select the word in all caps, and then select **Providers & Resources**.
- 3. On the **ORDERING FACILITY** tab, select **IMPORT**.
- 4. Select **Choose File**, browse for and select the file to import, and then select **Open**.
- 5. Optional. To overwrite existing facilities, select the **Update Existing** checkbox.
- 6. Select IMPORT.

Add a location or contact to an ordering facility

Ordering facilities can have multiple locations. For example, skilled nursing facilities (SNFs) can have different halls, each with different nurse stations or fax lines. To address this, you can add locations or contacts to an ordering facility.

- 1. On the burger 🔜 menu, select **Setup**.
- 2. Next to the burger button, select the word in all caps, and then select **Providers & Resources**.
- 3. On the **ORDERING FACILITY** tab, select the **LOCATIONS/CONTACTS** sub-tab. **Note**: If new fields do not appear, scroll down.
- 4. Select **NEW CONTACT**, and then enter the following settings.

Setting	Description	
Location Name	Type the name of the location.	
Phone/Fax	Type the phone number and fax number of the location.	
Ordering Facility Type	Select the type of ordering facility for the location.	
POS Type	Select the place of service code or SLI for the location.	
Primary Contact	Select if this location is the primary contact for the ordering facility.	

- 5. Select **SAVE CONTACT**.
- 6. Select **SAVE & CLOSE**.

Add a provider organization

A provider organization is a parent entity for provider groups and locations.

- 1. On the burger \blacksquare menu, select **SETUP**.
- 2. Next to the burger button, select the word in all caps, and then select **Providers & Resources**.
- 3. On the **PROVIDER ORGANIZATIONS** tab, select **Add**, and then enter the following settings.

Setting	Description	
Code	Type your internal code for the organization.	
Description	Type a description.	

4. Select **SAVE & CLOSE**.

Add a provider group or location

If your institution works with a provider group, add it to the system.

- 1. On the burger menu, select **SETUP**.
- 2. Next to the burger button, select the word in all caps, and then select **Providers & Resources**.
- 3. On the **PROVIDER GROUP / LOCATION** tab, select **Add**, and then enter the following settings.

Setting	Description	
Code	Type your internal code for the group.	
Name	Type the name of the group.	
Provider Organization	Select the provider organization to which the provider group or location belongs.	
[Address]	Type and select the address and country or region of the group.	
Phone/Fax No.	Type the primary contact information for the group.	
Email	Type the email address of the primary contact at the group.	
Report Password	Type the password that the provider group must use to view reports generated from exams that they ordered.	

4. Select **SAVE**.

- 5. Use the **PROVIDERS** sub-tab to view or edit the list of configured providers.
- 6. Use the **SUMMARY** tab to display a list of patients or studies associated with the current provider group.
- 7. Use the **MARKETING REP** sub-tab to add a marketing rep to the provider group.

Add a resource

A *resource* is a nurse, provider, laboratory, radiologist, technologist, or referring provider. You can add individual resources and add them to one or more provider groups. See also "Add a technologist resource."

- 1. On the burger 🔜 menu, select **SETUP**.
- 2. Next to the burger button, select the word in all caps, and then select **Providers & Resources**.
- 3. On the **RESOURCE** tab, select **Add**, and then enter the following settings.

Note: The settings available differ depending on your selection in the Type dropdown list.

Tab/Sub-tab	Setting	Description
RESOURCE	Туре	Select an Exa PACS/RIS provider type.
	Code	Type your internal code for the provider.
	Name	Type the name of the provider.
	Title	Type the academic credentials of the provider (e.g. MD)
	Group Number	Type the group number of the provider.
	Dr. Office Name	Type the business name of the provider's office.
	Federal Tax ID	Type the federal tax ID of the provider.

Tab/Sub-tab	Setting	Description
	EIN No.	Type the employer identification number of the provider.
	ETIN No.	Type the ETIN to be able to use electronic transfers.
	Medicare UPIN	If the provider has no NPI, type the unique physician identification number of the provider.
	Market	Select the market that the resource serves. All facilities in the Facilities list that are associated with the selected market become selected.
	Facilities	Select all facilities with which the provider is associated.
	Skill Code	Select the skills or specialties of the provider.
	License No.	Type the state medical license number of the provider.
	Medicare Provider No.	Type the Medicare provider number of the provider.
	Medicaid Provider No.	Type the Medicaid provider number of the provider.
	Prov. Agreement Code	Type the code for the legal provider agreement code.
	Max TAT	Assign a maximum turnaround time for the provider, in minutes. Exa PACS/RIS divides this time into 4 segments on the TAT monitor on the worklist.
Contact	Code	Type your internal code for the provider.
Info/Contact Information	Provider Organization	Type the organization to which the provider belongs.
	Group	Select the provider group to which the provider belongs.
	Email	Type the email address of the provider. This is required to receive email reports, notifications, or attachments.
	Contact Name	Type a contact name, such as the name of the administrative assistant of the provider.
	[Address]	Type or select the country or region and address of the provider.
	Service Provider PRID	Type the PRID of the service provider.
	Locum Arrangement	If the resource is a locum, type the locum business arrangement number.

Tab/Sub-tab	Setting	Description
	Provider Alerts	Type any alerts for the provider, such as "only takes referrals."
	Office Phone/Fax	Type the contact information for the provider's office.
	Mobile/Pager No.	Type the mobile and/or pager number of the provider.
	Phone No.	Type the personal phone number of the provider.
	Fax No.	Type the personal fax number of the provider.
	Primary Contact	Select to send reports to the referring provider only.
Reports to Me/Contact Information	Email Report Link Email Attachment Postal Mail Fax Office Fax	Select to send reports only to the individual provider, and select which methods to use. Note: If you select Email Report Link and/or Email Attachment , you must enter the recipient email address in the Contact Information area.
Reports to Group	Email ReportLink Email Attachment Postal Mail Fax Office Fax	Select to send reports to all members of the group, and select which methods to use. Provider groups have their own fields for email and fax.
Report Password		If you selected Email Report Link previously, type the password that the provider must use to view reports generated from exams that they ordered.
Reports to Patient Portal	Delay	Type the number of days to wait before posting reports on the patient portal.
Image Delivery Options	CD Film Paper	Select which media to use to deliver images.
Notification Settings	Email/Fax	Select to receive notifications by email and/or fax.
	Receive When Added as CC Provider	Select to have the provider receive notifications by email if they are added as a CC (carbon copy) provider.

4. Select **SAVE & CLOSE**.

Add a technologist resource

When you add a technologist resource, you can specify which appointment types the technologist is allowed to perform. You can also assign schedule rules to the technologist, which prevents scheduling them for an appointment that they are not allowed to perform.

- 1. Follow the steps in "Add a resource" to add a resource of type **Technologist**, but do not select **SAVE & CLOSE**.
- 2. On the **ALLOWED APPOINTMENTS** sub-tab, select **ADD**.

- 3. In the **Edit Appointment Types** dialog, select the checkboxes for all appointments that the technologist is allowed to perform, and then select **SAVE**.
- 4. Optional. On the **SCHEDULE RULES** sub-tab, select an edit button to modify a schedule rule.
- 5. Select **SAVE & CLOSE**.

Configure a provider pay schedule

To help with billing, you can configure a pay schedule for each organization that provides radiology reading services. The schedule defines the charges by procedure, modality, and radiologist.

- 1. On the burger menu, select **SETUP**.
- 2. Next to the burger button, select the word in all caps, and then select **Providers & Resources**.
- 3. On the **PROVIDER PAY SCHEDULE** tab, select **ADD**, and then enter the following settings.

Setting	Description
Pay Schedule Name	Type a name for the pay schedule. Typically, this is the name or organization of the radiologist.
Start/End Date	Select a date range during which the pay schedule is valid.
Provider	Select a radiologist to assign to the providing organization, and then select the plus + button. You can add multiple radiologists.
Modalities/Fee	Select one or more modalities to which to assign a fee. Type the fee to charge when using the selected modality during an exam, and then select the plus + button. Add all modality/fee combinations that the provider offers.
Appointment Types/Fee	Select one or more appointment (exam) types to which to assign a fee. Type the fee for the selected exam, and then select the plus + button. Add all appointment type/fee combinations that the provider offers.

4. Select **SAVE.**

View originating facilities

For reference, you can view a list of originating facilities that are recognized by Alberta.

- 1. On the burger 🔲 menu, select **SETUP**.
- 2. Next to the burger button, select the word in all caps, and then select **Providers & Resources**.
- 3. Select the **ORIGINATING FACILITIES** tab.

Configure scheduling and codes

You can set up information related to scheduling exams, including fees, body parts, appointment types, diagnostic and procedure codes, and various kinds of templates.

About fee schedules

Fee schedules define what your healthcare institution charges for procedures. There are three types of fee schedule. The *billing fee schedule* is the primary type of fee schedule, and lists the global fees before any other considerations. The *allowed fee schedule* is the contract rate agreed upon with insurance companies, and is used for reference purposes. The *self-pay schedule* reflects discounts for cash payments made by individual patients.

Configure a fee schedule

You can configure fee schedules by following these steps:

Prerequisites: Configure procedure codes.

- 1. On the burger 🔜 menu, select **SETUP**.
- 2. Next to the burger button, select the word in all caps, and then select Scheduling & Codes.
- 3. On the **FEE SCHEDULE** tab, select **ADD**, and then enter the following settings.

Setting	Description
Fee Schedule Name	Type a name for the fee schedule.
From Date/To Date	Select a date range during which the fee schedule is valid. The From date must be the current day or earlier.
Туре	Select a type from the dropdown (see "About fee schedules").

- 4. Select **SAVE.**
- 5. On the **FEE SCHEDULE** tab, find the schedule you just added, and then double-click to open it.
- Select ADD PROCEDURE, select one or more procedures in the list, and then select SAVE. Note. To find procedures to add, enter one or more of the following search criteria, and then select SEARCH.

Setting	Description
Add To	Shows the name of the current fee schedule.
Facilities	Select the facilities that provide the procedure.
Code	Type the code for the procedure.
Short Description	Type one or more characters in the description of the procedure.
Modalities	Select the modalities used in the procedure.
Ref. Code	Type the reference code for the procedure. In most cases this can be the CPT or LOINC code.
NDC Code	Type the national drug code associated with the procedure.
Service Type	Select a service type in the dropdown list.

7. On the FEE SCHEDULE tab, select SAVE.

Import or export a fee schedule

You can import a fee schedule from another Exa PACS/RIS installation, or export a fee schedule from your current installation.

- 1. On the burger 🔲 menu, select **SETUP**.
- 2. Next to the burger button, select the word in all caps, and then select **Scheduling & Codes**.
- 3. On the **FACILITY FEE SCHEDULE** tab, double-click an existing fee schedule to open it.
- 4. To import a fee schedule:
 - a) Select **IMPORT FEE SCHEDULE**.
 - b) Select **Choose File**, browse for and select a file to import, and then select **Open**.
 - c) Select IMPORT.
- 5. To export the current fee schedule to your Windows Downloads folder, select EXPORT FEE

SCHEDULE.

Configure a facility fee schedule

It can be useful to configure individual facility fee schedules: if your fees differ by facility; for teleradiology; of if you generate the Fees by Facility or Fees by Modality report.

- 1. On the burger **menu**, select **SETUP**.
- 2. Next to the burger button, select the word in all caps, and then select **Scheduling & Codes**.
- 3. On the **FACILITY FEE SCHEDULE** tab, select **ADD**.
- 4. Enter the following settings.

Setting	Description
Fee Name	Type a name for the facility fee schedule.
Start Date/End Date	Select a date range during which the schedule is valid.
Facilities	Select one or more facilities to which the schedule applies.
Modalities	Select one or more modalities to which the fee applies.
Modality Fee	Type the fee for the modality, and then select the plus + button. You can add multiple modality/fee combinations.

5. Select SAVE.

Configure body parts

You can define body parts for use in other parts of the program.

- 1. On the burger 🔲 menu, select **SETUP**.
- 2. Next to the burger button, select the word in all caps, and then select **Scheduling & Codes**.
- 3. On the BODY PARTS tab, select ADD.
- 4. Type the name and alternative name for the body part, and then select **SAVE**.

Configure diagnostic codes

You can enter SNOMED, ICD, or LOINC codes for use in other parts of the program.

- 1. On the burger 🔲 menu, select **SETUP**.
- 2. Next to the burger button, select the word in all caps, and then select Scheduling & Codes.
- 3. On the **DIAGNOSTIC CODES** tab, select **ADD**.
- 4. Enter the following settings.
 Code Type the code to enter.
 Description Type the code's diagnosis description.
 Code Type Select the code standard to which the code belongs.
- 5. Select **SAVE.**

Import diagnostic codes

If you obtain exported diagnostic codes, such as from the CMS or AMA, you can import them.

- 1. On the burger 🔲 menu, select **SETUP**.
- 2. Next to the burger button, select the word in all caps, and then select **Scheduling & Codes**.
- 3. On the **DIAGNOSTIC CODES** tab, select **IMPORT**.
- 4. Select **Choose File**, browse for and select the file to import, and select **Open**.
- 5. Optional. To overwrite existing facilities, select the **Update Existing** checkbox.
- 6. Select IMPORT.

About health service codes, appointment types, and appointment type procedures A *health service code* (or *CPT code*) is an internal code that identifies a medical procedure. You enter health service codes in Exa PACS/RIS primarily *for purposes of billing*.

An *appointment type* is a separate entry that you associate with a health service code *for purposes of scheduling and medical examinations* (by the front desk, radiologists, and technologists). You work with either a health service code or an appointment type depending on which part of the program you are using. The appointment type code can be anything, but we recommend using the same code as the associated health service code.

An appointment type must include at least one *appointment type procedure*, which is simply the original health service code. In summary, the following example shows a health service code and description for a hand X-ray, and two associated appointment types, one for the right hand and one for the left hand.

Health Service (Code/Description)		Appt. Type Procedure
73120 RAD RADEX HAND 2 VIEWS	XR RIGHT HAND (73120)	73120 RAD RADEX HAND 2 VIEWS
	XR LEFT HAND (73120)	

When *scheduling* the exam, the scheduler uses one of the appointment types. When *reading* the exam, the radiologist also uses the appointment type. When *billing* the exam, the biller uses the health service code.

Configure health service codes

A *health service code* is an internal code that identifies a medical service. Additionally, health service code entries are detailed sets of information about procedures that Exa PACS/RIS uses for billing, ordering, and other functions. When you configure a health service code, you can add (associate) NDCs from which future technologists can select when performing the exam. This makes the process of searching for and adding the appropriate contrast material and other medications more efficient and accurate.

Prerequisite: For adding NDCs to a health service code, complete the steps in "Configure NDCs."

- 1. On the burger 🔜 menu, select **SETUP**.
- 2. Next to the burger button, select the word in all caps, and then select **Scheduling & Codes**.
- 3. On the **HEALTH SERVICE CODES** tab, select **ADD**.
- 4. Enter the following settings.

Setting	Description
Single/Empty Code	[Unused]
Facilities	Select one or more facilities that perform the procedure.
Code	Type your code for the procedure.
Short Description	Type a short description for the procedure.
Description	Type a full description of the procedure.
Service Type	Select the service type to which the procedure belongs.
Ref. Code	Type the reference code of the procedure. In most cases this can be the CPT or LOINC code.

Setting	Description
NDC Code	[Not used in Alberta]
NDC Measure	[Not used in Alberta]
Color Code	Select in the box, and then select a color in the picker to assign to the procedure.
SDE Study	Select the checkbox if the procedure is associated with echo ultrasound.

5. Select **SAVE**.

6. Optional. On the **GENERAL** sub tab, enter the settings in each of the following tabs, and then select **SAVE**.

Setting	Description
Body Part	Select the body part associated with the procedure.
Non-Transcribable	Select if the procedure cannot be transcribed.
Require Copay	Select if the procedure requires a copayment.
Require Physician	Select if the procedure must be performed by a physician.
Require Waiting Time	Select if the procedure requires a waiting time before beginning (such as drinking Barium some number of hours before a procedure).
Notes	Type notes for the procedure as needed.
Duration	Type the expected duration of the procedure.
Default Units	Type the number of procedure units.
RVU	Type or select the relative value units of the procedure for Medicare reimbursement.
Level	The provider level code that determines the pay rate to the radiologist.
Modalities	Select one or more modalities used in the procedure.

- 7. Optional. To add NDCs to the procedure code, do the following.
 - a. On the **NDC** sub-tab, select **Add**.
 - b. Search for a code by entering criteria in the search boxes at the top and pressing **Enter**.
 - c. Select the checkboxes of the NDCs to add, and then select **ADD**.
- 8. Optional. For **EXAM PREP. INSTRUCTIONS**, see "Configure exam prep instructions".
- 9. Optional. To specify a report template to be used for the procedure, on the **DEFAULT REPORT TEMPLATE** sub-tab, do one of the following.
- Under **Template List**, select an existing template.
- Select **NEW TEMPLATE**, type a template name, create a template in the word processing area, and then select **SAVE TEMPLATE**.
- 10. Select **SAVE & CLOSE**.

Import specimen catalogs

If you obtain specimen catalogs in CSV format, you can import them.

- 1. On the burger menu, select **SETUP**.
- 2. Next to the burger button, select the word in all caps, and then select Scheduling & Codes.
- 3. On the **PROCEDURE CODES** tab, select **SPECIMEN CATALOG**.
- 4. Select **Choose File**, browse for and select the file to import, and select **Open**.
- 5. Optional. To overwrite existing facilities, select the **Update Existing** checkbox.
- 6. Select IMPORT.

Import procedure codes

If you obtain exported procedure (CPT) codes, such as from the AMA or third-party billing companies, you can import them.

- 1. On the burger 🔲 menu, select **SETUP**.
- 2. Next to the burger button, select the word in all caps, and then select **Scheduling & Codes**.
- 3. On the **PROCEDURE CODES** tab, select **IMPORT CPT**.
- 4. Select **Choose File**, browse for and select the file to import, and select **Open**.
- 5. Optional. To overwrite existing facilities, select the **Update Existing** checkbox.
- 6. Select **IMPORT**.

Configure NDCs

You add an NDC (national drug code) for use elsewhere in the program. You add NDCs either manually or by importing them.

Add an NDC manually

- 1. On the burger 🔲 menu, select **SETUP**.
- 2. Next to the burger button, select the word in all caps, and then select **Scheduling & Codes**.
- 3. On the NDC CODES tab, select ADD.
- 4. Enter the following settings.

Setting	Description
Proprietary Name	Type the trade name, or the name of the drug chosen by the labeler.
Non Proprietary Name	Type the generic name or the active ingredient in the drug
NDC Package Code	Type the code from the manufacturer.
Package Description	Type the description of the package from the manufacturer.
Strength	Type the strength of the active ingredient, then select the units of strength in the UOM dropdown list.
Labeler Name	Type the name of company corresponding to the labeler code segment in the Product NDC.
Product NDC	Type the labeler code and product code segments of the NDC number, separated by a hyphen.
Route	Select the administration method for the drug.

5. Select SAVE.

Import NDCs

Hint: Select the Help button to view a list of the column names and their order.

- 1. Obtain a CSV file of NDCs that include the same fields in the previous table.
- 2. Next to the burger button, select the word in all caps, and then select **Scheduling & Codes**.
- 3. On the NDC CODES tab, select IMPORT.
- 4. Select Choose File, browse for and select the CSV file, and then select Open.
- 5. Optional: To append (and not overwrite) the CSV file to existing NDCs, select the **Update Existing** checkbox.
- 6. Select **IMPORT**.

About schedule blocks

Schedule blocks are reserved blocks of time on the schedule book for modality rooms at selected facilities. Schedule blocks can be for exams, non-exam events (such as "Lunch"), or both. There are three kinds of schedule block:

- Hard No other blocks can overlap (no double-booking)
- Soft Other blocks can overlap
- **Quick** A schedule block that is created "on the fly" from the schedule book.

Schedule blocks are given a *reason* (such as a specific patient's name), so that if scheduling is allowed, the scheduler knows what exams they can order during the block (such as ones needed by that specific patient).

The following summarizes some user rights related to schedule blocks.

User Rights	Description
Quick Block	Makes the Quick Block button available on the schedule book.
Quick Block + Schedule Rule	Able to clear the Display as a block on schedule book checkbox.
Quick Block + Schedule Block	Able to edit and delete a quick block.

To create a schedule block, you create a schedule rule within a schedule template and select the "Display as a block on schedule book" option. See "Configure a schedule template and schedule rules." To create a quick block, see "Create a quick block."

See also:

About schedule templates and schedule rules

About schedule templates and schedule rules

A *schedule template* contains one or more schedule rules for scheduling appointments. The schedule template links to one or more appointment types and one or more modality rooms.

A *schedule rule* determines when appointment types and modality rooms can be scheduled. Think of schedule rules as the "office hours" for exams. When working in the schedule book, Exa PACS/RIS

prevents you from scheduling an exam that breaks any rule you configure, such as by hiding modality rooms on specified days, or by warning you with a message.

Relationship between schedule rules and time slot availability

- 1. If **no rule** applies to a slot, the slot is always available
- 2. If an **exclusion rule** applies to a slot, the slot is not available
- 3. If an inclusion rule applies to a slot, regardless of time:
 - All other slots are unavailable
 - A priority is set for the inclusion rules in the following order: Specific date, yearly, monthly, weekly, daily.

For example:

- If a specific date and a daily inclusion rule apply, the specific date rule is applied and the daily rule is ignored.
- If two equal priority rules exist (such as two daily rules), they both apply (they "stack").
- Inclusion and exclusion rules can apply together, such as a weekly inclusion rule and a daily exclusion rule.

Configure a schedule template and schedule rules

To configure a schedule template:

- 1. On the burger 🔜 menu, select **SETUP**.
- 2. Next to the burger button, select the word in all caps, and then select Scheduling & Codes.
- 3. On the **SCHEDULE BLOCK** tab, select **ADD TEMPLATE**.
- 4. Type a name and description for the template and then select **SAVE**.
- 5. Under Schedule Rules, select ADD.
- 6. In the schedule rule screen, enter the following settings.

Setting	Description
Template Name	Select the template to which to add the schedule rule.
Rule Name	Select Predefined or Free Text , and then type or select a name for the schedule rule.
Modality Rooms Appointment Types Resource	Select a combination of these items along with dates and times to define the rule. For example, your rule could specify that: "Resource A can perform appointment type B in modality room C."
Туре	Select Repeating if you want the schedule rule to recur, or Date/Time if not.
Not Available	Select Not Available to make the corresponding block a <i>hard block</i> (prevent overlapping by other blocks). Clear the checkbox to create a <i>soft block</i> (allow overlapping by other blocks).
Display as a block on schedule book	Select if this rule defines a schedule block on the schedule book. Use the color picker to assign a color.
Ignore rule in scheduling engine (use only for displaying text/color label)	This setting becomes available when you select Display as a block on schedule book. Select this Ignore rule checkbox to display the block on the schedule book, without the program taking it into account when finding slots.

Setting	Description
Autoblocking	If you select a technologist resource for the rule, and the technologist is available to work in two modality rooms at the same time, select Autoblocking to prevent double-booking that technologist.

- 7. Do one of the following
- To save the current rule and add another rule, select SAVE.
- Select SAVE & CLOSE.

See also:

About schedule templates and schedule rules

Configure a schedule filter

You can create a filter that controls what appears in the schedule book. For example, a filter could specify to only show two modalities over four days.

- 1. On the burger \blacksquare menu, select **SETUP**.
- 2. Next to the burger button, select the word in all caps, and then select **Scheduling & Codes**.
- 3. On the SCHEDULE FILTER tab, select ADD.
- 4. Enter the following settings.

Setting	Description
Filter Name	Type a name for the filter.
No. of Days	Type the number of days to display on a single page of the schedule book. If the content of the page exceeds the available display width, a scroll bar appears.
Modality Display Width	Type the column width for each modality room, in numbers of pixels.
Locations	Select a facility in the dropdown list. The modality rooms at the selected facility appear in the Modality Rooms list.
Modality Rooms	Select one or more modalities in the list, and then select the right arrow button to add them to the Selected Rooms list. These are the only modality rooms that will appear in the schedule book when you apply the filter.

5. Select **SAVE.**

Configure study statuses

Workflows in Exa PACS/RIS are status-driven. To create or tailor workflows, you can create a set of study statuses, and then configure how studies move from status to status (see "Configure study flow"). To add statuses:

- 1. On the burger 🔜 menu, select **SETUP**.
- 2. Next to the burger button, select the word in all caps, and then select **Scheduling & Codes**.
- 3. On the **STUDY STATUS** tab, on the **STUDY STATUS** sub-tab, in the **Facility** dropdown list, select a facility, and then select **ADD**.
- 4. Enter the following settings.

Group	Setting	Description
General	Status Code	Type your internal code for the status.
Information	Add to Study Shortcut Menu on Worklist	Select to add the status to the study shortcut menu.
	Status Description	Type the name of the status.
	MobileRad Related	Select if the status is for MobileRad. For use with the MobileRad app.
	Color Code	Select in the box, and then select a color from the picker to color code the status.
	Order Related	Select if the status is related to orders only.
	Max Wait Time	Type the number of minutes to complete check- in. If the time is exceeded, the "Exceeds maximum time limit" count at the bottom of the worklist increments.
Things to Validate	Always Show Validation Window	Reserved for encounters.
	[Other checkboxes]	Select the items that Exa PACS/RIS validates (checks for inclusion) before moving the study to the next status.
	Document Review	Select to require document review to advance to the next status in the study flow. Select the documents for which to require review in the button list.
Notification Settings	Email/Fax Template	Select templates that determine whether and to whom notification is made when a study arrives at the status.

5. Select SAVE.

See also: Require document review

Configure study flow

Exa PACS/RIS provides a graphical representation of the flow of studies from status to status at each facility. You can define these flows, and also apply routing rules to control whether data can move to the next status in the flow. You do not need to apply routing rules for manual DICOM send operations. **CAUTION**: Changing the study flow incorrectly can "orphan" studies, leaving them unable to move to the next status in the work<u>flow</u>.

- 1. On the burger 🔲 menu, select **SETUP**.
- 2. Next to the burger button, select the word in all caps, and then select Scheduling & Codes.
- 3. On the **STUDY STATUS** tab, select the **STUDY FLOW** sub-tab.
- 4. In the **Facility** dropdown list, select a facility.
- 5. The flow diagram appears, with arrows indicating the direction of flow.

- 6. To add a flow, drag the orange bar in a node to another node.
- 7. To add a routing rule to a flow, select the triangle on an arrow connecting status nodes, select a routing rule, and then select **OK**.
- 8. Select **SAVE.**

Add a transcription template

You can add a template for use during transcription. A *transcription template* is for streamlining transcription, whereas a *report template* is for final formatting of approved reports.

- 1. On the burger 🔲 menu, select **SETUP**.
- 2. Next to the burger button, select the word in all caps, and then select **Scheduling & Codes**.
- 3. On the **TRANSCRIPTION TEMPLATE** tab, select **ADD**.
- 4. Enter the following settings.

Setting	Description
Template Name	Type a name for the template.
Global	Select to make the template available to all users.
Macro Keyword	Type a macro keywords that can be voice-recognized to open a template.
User	You can restrict availability of the template by assigning users to it. Select a user in the dropdown list and then select the plus + button. You can assign the template to multiple users.
Appointment Types	Restricts availability of the template to studies of the selected CPT code.
Require ALL Match	Restricts availability of the template to users and studies who match all criteria entered in these settings.
Facilities	Select one or more facilities to which to assign the template.
Modality	Restricts availability of the template for use with one or more modalities.
Body Part	Restricts availability to the template for use with one or more body parts.
Study Description	Restricts availability of the template to studies with the entered study description.
Institution	Select one or more institution to which to assign the template.

5. Select **SAVE.**

- 6. In the template editor, type and format text for the template, and then select **SAVE & CLOSE**.
- 7. Optional. To paste items onto the template that you copied from outside of Exa PACS/RIS, on the **HOME** tab, select **Paste**, and then in the button shortcut menu, select **Paste**.

About report templates

A *report template* is for final formatting of approved reports, whereas a *transcription template* is for streamlining transcription. You can create report templates and enhance them with logos, tables, and merge fields. When you prepare a report based on your template, Exa PACS/RIS substitutes merge fields with study and patient information.

Add a report template

Add a report template with the following steps, and then continue to the next procedure to edit the header or footer.

- 1. On the burger \blacksquare menu, select **SETUP**.
- 2. Next to the burger button, select the word in all caps, and then select **Scheduling & Codes**.
- 3. On the **REPORT TEMPLATE** tab, do one of the following.
 - To base the new template on an existing one, select the copy ³ button of the existing template.
 - To start a new template from scratch, select **ADD**.

Setting	Description
Template Name	Type a name for the template.
Market	Optional. Select the market to associate with the template. All facilities in the selected market become selected in the Facilities field.
Facilities	Select all facilities that use the template.
Institution	Select institutions that use the template.
Modality	Select all modalities to which the template can apply.
Summary	Type explanatory information about the template.
Study Description	Type study descriptions for the templates to be applied. For example, US Abdomen could have a different template than MRI Abdomen.

4. Select SAVE.

5. Perform the steps in the following subsections as needed.

Configure the header and footer of a report template

You can configure the header and footer of a report template, or edit existing ones.

- 1. On the burger menu, select **SETUP**.
- 2. Next to the burger button, select the word in all caps, and then select **Scheduling & Codes**.
- 3. On the **REPORT TEMPLATE** tab, double-click a template.
- 4. At the bottom of the page, select the **PAGE HEADER/FOOTER** sub-tab.
- 5. The word processor appears (it may take a few moments).
- 6. On the **INSERT** tab, select Header, and then in the button shortcut menu, select **Edit Header**.
- 7. Type information for the header.
- 8. Perform similar steps to add a footer.
- 9. Optional. To add logos, merge fields, and other design elements, see topics that follow.
- 10. Select **SAVE.**

Configure a report template signature

You can configure a standardized signature on your report templates to add to reports.

- 1. On the burger 🔲 menu, select **SETUP**.
- 2. Next to the burger button, select the word in all caps, and then select **Scheduling & Codes**.
- 3. On the **REPORT TEMPLATE** tab, double-click a template.
- 4. At the bottom of the page, select the **REPORT SIGNATURE** sub-tab.
- 5. Type information for the signature.

- 6. Optional. To add merge fields, see "Add merge fields."
- 7. Select SAVE.

Add a logo

- 1. Prepare a bitmap image and save it in the following folder. [drive]:/EXA/WebImages
- 2. Place the cursor in the header or footer where you want to place the logo. **Note**: It may be helpful to add carriage returns to make room for the logo.
- 3. On the **INSERT** tab, select **Image**, and then in the button shortcut menu, select **Image**.
- 4. In the **Open File** dialog, type the name of the bitmap image and then select **Open**.
- 5. In the image shortcut menu, select **Format**.
- 6. In the **Image Attributes** dialog, under Wrapping Style, select **In Line**, and then select **OK**.
- 7. Optional. On the **HOME** tab, select the text alignment tools, or drag the image to position it.
- 8. Select Save.

Add a table

- 1. On the **INSERT** tab, select **Table**.
- 2. In the Insert Table dialog, enter table settings and then select OK.
- 3. Type information in the table as needed.
- 4. Optional. Add merge fields to the table.
- 5. Select Save.

Add merge fields

- 1. Place the cursor in the header or footer where you want to add the merge field.
- 2. On the **REPORTS** tab, select **Merge Field**.
- 3. On the **Merge Field** button shortcut menu, hover over a category, and the select a field in the submenu.
- 4. Select **Save**.

Configure functional and cognitive statuses

Functional and cognitive statuses are preset descriptions of a patient's level of physical and mental functioning that can be used in other parts of the program.

- 1. On the burger 🔲 menu, select **SETUP**.
- 2. Next to the burger button, select the word in all caps, and then select **Scheduling & Codes**.
- 3. On the **FUNCTIONAL STATUS** tab, in the **Description** box, type a functional status and then select **SAVE**.
- 4. On the **COGNITIVE STATUS** tab, in the **Description** box, type a cognitive status and then select **SAVE.**

What are lead time and expected arrival time?

The *lead time* is the number of minutes prior to the appointment time that the scheduler wants the patient to arrive. The program calculates an expected patient arrival date and time (the *expected arrival time*) by subtracting the lead time from the appointment time. The scheduler may find it convenient to inform the patient of this expected arrival time rather than the formal start time of the appointment.

If an appointment contains multiple exams, the program calculates the expected arrival time based on the lead time of the first exam. If the first exam has no lead time, it uses that of the second exam, and so on. If no exams have lead times, the expected arrival time is simply the time of the first exam.

Configure appointment types

An appointment type defines a set of procedures to perform during an exam. You can configure appointment types for use in scheduling and other parts of the program.

- 1. On the burger 🔜 menu, select **SETUP**.
- 2. Next to the burger button, select the word in all caps, and then select Scheduling & Codes.
- 3. On the **APPOINTMENT TYPES** tab, select **ADD**.
- 4. Enter the following settings.

Setting	Description
Code	Type your internal code for the appointment type.
Ref. Code	Type the reference code.
Name	Type a name for the appointment type.
Description	Type a description for the appointment type.
Duration	Type the expected duration of the appointment type.
Additional Time	Type the number of additional time needed beyond the default duration.
Lead Time	Type the number of minutes to arrive before the exam begins.
Exam Count	Type the number of exams to be included.
Grouped Appointment	Select for grouped appointments.
Facilities	Select one or more facilities where the appointment type is available.
Modality	Select one or more modalities to use for the appointment type.
Modality Room	Select one or more modality rooms where the appointment type can be scheduled.
Keywords	To make the appointment type easier to find during scheduling, type a keyword and select the plus button. Add as many keywords as needed.

- 5. On the **APPOINTMENT TYPE PROCEDURES** sub-tab, select **ADD**.
- 6. In the **Appointment Procedure** dialog, select a procedure or service and other settings, and then select **SAVE**.
- 7. On the **EXAM PREP ROOM LEVEL CONFIG** tab, add or edit exam prep instructions as needed.
- 8. Select **SAVE**.

Configure exam prep instructions

For each appointment type you can assign exam and room preparation instructions. The instructions are linked to modality rooms so that if an exam is rescheduled to a different room, the instructions change accordingly. To configure exam prep instructions, start by following the procedure in "Configure appointment types," and then:

- 1. On the **Setup** > **Scheduling and Codes**, open a type to edit.
- 2. On the **EXAM PREP/ROOM LEVEL CONFIG** sub-tab, select **ADD**, and then enter the following settings.

Setting	Description
Modality Room	Select the modality room to which to apply the prep instructions.
Duration	Type the estimated duration of the exam.
Additional Time	Type the number of additional time needed beyond the default duration.
Lead Time	Type the number of minutes to arrive before the exam begins.
Prep Instructions	Type the exam and room preparation instructions.

3. Select SAVE.

Configure grouped appointments

A *grouped appointment* is an appointment type that contains more than one billable procedure. Grouped appointments make it easy to schedule more than one procedure or exam to perform during a single patient appointment. To configure a grouped appointment:

- 1. On the burger 🔲 menu, select **SETUP**.
- 2. Next to the burger button, select the word in all caps, and then select **Scheduling & Codes**.
- 3. On the **APPOINTMENT TYPES** tab, select **ADD**.
- 4. Select the **Grouped Appointments** checkbox.
- 5. Enter the following settings.

Setting	Description
Code	Type a unique code for the grouped appointment. The code does not need to match an existing procedure code.
Ref. Code	Type the reference code, if any.
Name	Type a name for the grouped appointment type.
Description	Type a description for the appointment type (it can be the same as the name).
Duration	Type the total expected duration of all procedures in the grouped appointment.
Lead Time	(Will be determined automatically)
Exam Count	Type the number of procedures to be included.
Grouped Appointment	(Already selected).
Facilities	Select one or more facilities where the appointment type is available.
Keywords	To make the appointment type easier to find during scheduling, type a keyword and then select the plus button. Add as many keywords as needed.

- 6. Select **SAVE**, and then in the message box, select **YES**.
- 7. In the **Appointment Types** dialog, in the **Appointment Type** dropdown list, select an appointment type to add to the grouped appointment.
- 8. Optional. In the Minutes to wait after exam box, type the expected minutes the patient must

wait between appointment types.

- 9. Select **SAVE**, and then in the message box, select **YES**.
- 10. Repeat steps 6–8 until all appointment types are added to the grouped appointment.
- 11. On the **APPOINTMENT TYPES** tab, select **SAVE**.

View locked slots

Exa PACS/RIS "locks" timeslots as soon as a scheduler selects them. The prevents other schedulers from simultaneously double-booking in the same slot. You can view which slots are currently locked with the following steps.

- 1. On the burger 🔜 menu, select **SETUP**.
- 2. Next to the burger button, select the word in all caps, and then select Scheduling & Codes.
- 3. Select the **LOCKED SLOTS** tab.

Configure WCB injury codes

To configure WCB injury codes for use in other parts of the program:

- 1. On the burger 🔲 menu, select **SETUP**.
- 2. Next to the burger button, select the word in all caps, and then select **Scheduling & Codes**.
- 3. On the **WCB INJURY CODES** tab, select **ADD**.
- 4. Enter the following settings.

Setting	Description
Туре	Select Nature or Area.
Code	Type the WCB code.
Description	Type a description for the appointment type.

5. Select **SAVE**.

Configure DICOM settings

You can configure DICOM settings such as by configuring AEs, setting up file stores, and defining receiver and routing rules.

Note: The default AE title for Exa PACS/RIS is EXA_SCP, or EXA_MWL when acting as a worklist source. These titles are configured elsewhere in the program by a Konica Minolta installation engineer.

Configure application entities

In Exa PACS/RIS, an *application entity* (*AE*) *title* is a named configuration for a DICOM application that includes information such as its type, host computer, and port number. You must set up AE titles for Modality Worklist, send, receive/store, print, query/retrieve, and other functions to make them available on Exa PACS/RIS. To configure an AE, use the following procedure and then continue to "Configure a DICOM printer."



Failure to correctly configure application entities can cause general failure of DICOM communication between Exa PACS/RIS and those entities.

- 1. On the burger 🔜 menu, select **SETUP**.
- 2. Next to the burger button, select the word in all caps, and then select **DICOM**.
- 3. On the **AE TITLE** tab, select **ADD**.

4. Enter the following settings, and then select SAVE.Note: Depending on the AE type, not all of the following settings are available.

Setting	Description
АЕ Туре	Select one or more transactions that Exa PACS/RIS makes with the AE.
AE Title (Remote)	Type the title of the AE. If an AE title is pre-configured on the device hosting the AE, use the same title.
Ignore Scan Docs (Send)	Select to prevent sending of scanned documents to the AE (only DICOM studies are sent).
My AE Title	Type a title to set the identity of Exa PACS/RIS individually for each DICOM node. In most cases, leave blank to use the default (EXA_SCP for PACS/RIS functions, and EXA_MWL for modality worklist functions).
Host Name	Type the host name or IP address of the AE.
Description	Type a description for easy identification of the AE.
Disable QC2LIVE	Select to disable the automatic transfer of studies from QC to live.
Retries	Type the number of times the system attempts to reconnect with the AE after a communication failure.
Send Single Instance per Study	Select to send one image per study.
Max Concurrent	Type the maximum number of concurrent threads that the system can use for the transaction.
Facility	Select the facility to associate with the AE.
Send Annotations as	Select how to process annotations for sending. Burned in : "Flattens" the image and overlay into a single image. DICOM Overlay : Converts the annotations to a DICOM overlay and sends along with the study. GSPS/PR Object : Converts the annotations to a presentation state and sends along with the study.
Send Unique Image UID from Viewer	Select to generate a new UID for each image (rather than just for the series or study).
Match on ULI	Select to ignore issuer type and match patients based on ULI.
Issuer Type	Select the type of issuer of PID: None - DICOM receive and query/retrieve takes place as if no issuer was configured. Static - Select a pre-configured issuer in the Issuer list. Dynamic - Automatically define the issuer based on retrieved results, and allow multiple issuer/alternate ID combinations.
Issuer	When you select an issuer type of Static , select the entity that issues the patient's PID, MRN, or account number. This enables

Setting	Description
	tracking and correct assignment of account numbers for sending and receiving studies when more than one are available.
AE Flag	Select one of the following services to use to send studies. DICOM : C-MOVE DICOM SSL : C-MOVE, secured HL7 : Standard HL7 protocols. OPAL : The Opal Transfer service.
Institution	Type the name of the institution for easier identification.
File Store	Select a file store for storing received data.
Port	Type the port number through which the AE can connect to Exa PACS/RIS (the Exa PACS/RIS listening port).
Require SSL	Select this checkbox if: 1) you selected the DICOM SSL AE flag; and 2) the port number requires an SSL certificate.
Transfer Syntax (Send)	Select the transfer syntax for sending.
Transfer Syntax (Receive)	Select the transfer syntax for storing and receiving.
Vehicle	Select vehicles to which to assign received studies.
SDE Modality	Select if the AE is a dedicated echo ultrasound.
Include Approved Reports	Select to include approved reports when sending as DICOM. Note : When DICOM-sending, the report status (such as Approved or Transcribed) is not included. To include the status, send via Opal.

Configure a DICOM printer

Configure and save AE with AE type of "Print," and then perform the following procedure.

- 1. On the **AE TITLE** tab, double-click your printer.
- 2. Under Extra Printer Options, enter the following settings.

Setting	Description
ARTIM Timeout	Type the number of minutes to wait for an acceptance or rejection response to an association request before timing out.
Read Timeout	Type the number of minutes the printer waits to receive data before timing out.
Write Timeout	Type the number of minutes the printer waits to send data before timing out.
Max PDU Length	Type the maximum number of bytes of a protocol data unit that the printer can receive.
Border Margins	[Unused]
True Size	[Unused]

3. Open the printer AE that you just configured.

4. Select **ADD CONFIGURATION**.

5. In the **Configuration** dialog, enter the following settings.

Setting	Description
Name	Type a name for the printer.
Medium	Select the printer medium.
Film Size	Select the film size for the printer.
Border Density	Select a border density of Black or White.
Memory Allocation (KB)	For most printers, accept the default of Auto . Otherwise, type the amount of memory in kilobytes to allocate for a print session.
Film Destination	Select the destination for exposed film.
Film Orientation	Select the orientation of the film.
Magnification	Select a magnification factor for printing images.
Empty Density	Select the density of the image box area on the film that contains no image.

6. Select **SAVE**.

Configure a file store

File stores are directories on servers that Exa PACS/RIS uses to store files received in a DICOM transaction, such as images from a modality.

CAUTION: Changing <u>an existing</u> file store can prevent the study from opening.

- 1. On the burger 🔲 menu, select **SETUP**.
- 2. Next to the burger button, select the word in all caps, and then select **DICOM**.
- 3. On the FILE STORE tab, select ADD.
- 4. Type the server name, root directory, and notes, and then select SAVE.

Configure routing rules

With routing rules, you can define how certain types of data flow between Exa PACS/RIS and other AEs. For example, you could create a routing rule that tells Exa PACS/RIS to automatically send all data that it receives from ultrasound modalities to another PACS. You can also add criteria to your rule for more precise control. For example, you could specify to only send ultrasound data coming from a specific facility.

Use the following procedure to configure a routing rule, and then apply the rule by following the steps in "Configure study flow." It is not necessary to apply routing rules for manual DICOM send operations.

- 1. On the burger 🔜 menu, select **SETUP**.
- 2. Next to the burger button, select the word in all caps, and then select **DICOM**.
- 3. On the **ROUTING RULES** tab, select **ADD**.
- 4. Enter the following settings. The available settings change depending on the AE type that you select in the Type dropdown list.

Setting	Туре	Description
Rule Name	All	Type a name for the rule.

Exa® PACS/RIS 1.4.31_P6 User's Manual, Alberta

Setting	Туре	Description
Туре	All	Select the transaction to perform with the AE (for example, SEND).
Interface/Trigg er Name	HL7 Send	Select an interface and/or trigger for HL7 send actions.
AE Title	SEND PRINT QUERY/RETRIEVE Send Report (Opal) LOCAL_CACHE	Select the AE with which to perform the transaction (for example, select Remote_Hospital to send to that AE).
Priority	SEND PRINT QUERY/RETRIEVE Send Report (Opal) HL7 Send LOCAL_CACHE	Type a number to indicate which rules to evaluate first. Lower numbers take higher priority. Refer to your current list of rules on the ROUTING RULES tab to determine the priority to use for the rule you are adding.
Attempts	SEND PRINT QUERY/RETRIEVE Send Report (Opal) HL7 Send LOCAL_CACHE	Type the number of attempts the program should make to apply the rule.
Priors	QUERY/RETRIEVE	Type the number of priors to retrieve. Type 0 (zero) to specify all priors.
Modality	QUERY/RETRIEVE	Select an option to filter which priors to retrieve.
Number of Priors to Send	SEND LOCAL_CACHE	Type the number of priors to send along with the study.
Auto Send Priors	SEND LOCAL_CACHE	 Select to send any priors found in the system along with the current study, and to enable functionality of the Relevant Priors checkbox. The system sends as many priors as it can find, up to the number you specify previously. The system sends the most recent priors first.
Relevant Priors	SEND LOCAL_CACHE	 Select to send relevant priors when auto-sending, and then enter criteria to define what is relevant. Selecting this checkbox enables the functionality of the Force Relevant Only checkbox. If you do not specify criteria (see later in this table), the system considers relevant priors to be studies of the same modality and/or body part. The system sends as many relevant priors as it can find, up to the number you specify previously.

Setting	Туре	Description
		 If the system finds fewer relevant priors than the number specified, it adds non-relevant priors up to the number specified.
Force Relevant Only	SEND LOCAL_CACHE	 Select to prevent sending of non-relevant priors. If the system finds fewer relevant priors than the number specified previously, it does not send any additional priors.
[Relevant priors settings]	SEND LOCAL_CACHE	Available when you select Relevant Priors . Type or select which priors (the leftmost criteria) you consider relevant to which modalities (the rightmost criteria). Select SET , and then specify additional prior modality pairings as needed.

- 5. Optional. Configure a criterion for the rule:
 - a. In the **Field** dropdown list, select an argument. For example, *Modality*.
 - b. In the entry field that appears, select a matching value for the argument. For example, in the *Modality* list, select *MG*.
 - c. Select ADD TO RULES.
 Result: In this example, when Exa PACS/RIS receives an MG study, it automatically sends it to the AE named Remote_Hospital.
- 6. Optional. Add more criteria.
- 7. Select SAVE.

Configure AE scripts

You can write scripts that modify DICOM tags when carrying out a DICOM-related transaction such as sending, printing, or receiving.

- 1. On the burger 🔲 menu, select **SETUP**.
- 2. Next to the burger button, select the word in all caps, and then select **DICOM**.
- 3. On the **AE SCRIPTS** tab, select **ADD**.
- 4. Enter the following settings.

Setting	Description
AE Type AE Title	Select a transaction and node. The script runs when Exa makes the selected transaction with the selected node.
All	Select all AEs of the selected AE Type.
Script Description	Type a description of the script.
Asynchronous	Select to run the script asynchronously.

- 5. In the **Script** area, type the script to run when the previous conditions are true. **Note**: For syntax, select the help ? button.
- 6. Select **COMPILE**, and correct any errors that occur.
- 7. When the script is free of errors, select SAVE.

Understanding receiver rules

A *receiver rule* is a detailed set of criteria and instructions that tells Exa PACS/RIS where to place studies that it receives, and what status to assign them. For example, you can configure a receiver rule such that studies with unrecognized account numbers are placed on the QC tab to await reconciliation by the user before going live.

Note: Receiver rules also have an important role in accelerating the processing of incoming data. Exa PACS/RIS processes each receiver rule in order on a given computer. Therefore, to improve speed, you can apply different rules on different computers.

To understand how receiver rules are evaluated and applied, it is helpful to imagine a 4-step process that Exa PACS/RIS performs for each incoming study.


Find a receiver rule that matches the study.

Validate the study against existing PACS studies and/or match it to existing RIS orders. Process the successes (studies that passed validation and/or matched orders). Process the failures (studies that failed validation or did not match an order).

A detailed explanation of each of these steps follows.

Step 1 – Find a matching receiver rule

When Exa PACS/RIS receives a DICOM study, it evaluates the study against each receiver rule on the RECEIVER RULES tab in order of "Priority" (starting from the top) until it finds one that matches.

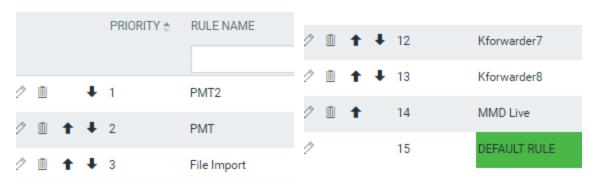

From top...

...to bottom

If no user-defined rule matches, Exa PACS/RIS uses a "default" rule that has a minimum number of criteria to ensure that all legitimate studies match at least one rule. (If a study did not match any rule, Exa PACS/RIS would not receive it.)

To evaluate whether a study matches a rule, Exa PACS/RIS compares the settings you enter under **Rule Info and Filter** (in the green box in the following figure) to the information in the study. If all relevant criteria match, the rule becomes active, and the process continues to step 2.

Rule info and Filter

Rule Name *		Inactive
AE Title	All	Y
Facility	All	T
Modality	All 🔻	
Institution		
Status	Unread	T
Interval (Sec) *	120	
Trigger RoutingRules		

Step 2 – Validate and match against PACS and/or RIS

A "rule" is actually not a single rule, but rather a combination of the previous "Rule Info and Filter," plus one of four possible preset "Applied Rules," such as in the following figure.

Re	conciliation Mode: Pacs only site
En	nit Live Update
Pr	ecache Study
Pr	ecache Priors
No	o. of. priors: 3
Pi	ck study description from DICOM
Pa	tient
•	Account #/Dicom Patient ID
•	Last name
•	Date of Birth
٠	Move Anyway (Even in exception)
٠	Move to live when there is no-mate
St	udy
	Study UID

Figure: Applied rules in the PACS ONLY preset.

Exa PACS/RIS compares the items in the green boxes from the incoming study against PACS, RIS, or both, depending on the reconciliation mode (the first bullet item in the figure). The items under Patient (such as "Last name" in the figure) and Study ("Study UID") must match a patient in PACS and/or a RIS order. Exa PACS/RIS stores the result of the match (success or failure) in this step, and then evaluation continues to step 3 or 4.

Step 3 – Process successes

If matching succeeded, Exa PACS/RIS waits the number of seconds specified in the **Interval** setting from step 1, moves the study from the QC tab to the ALL STUDIES tab (the study "goes live"), and assigns to the study the status selected in the **Status** dropdown list from step 1. At the same time, it performs the actions and applies the options in the blue box in the following figure.

Applied Rules

- Reconciliation Mode: Pacs only site
- Emit Live Update
- Precache Study
- Precache Priors
- No. of. priors: 3
- Pick study description from DICOM
- Patient
 - Account #/Dicom Patient ID
 - Last name
 - Date of Birth
 - Move Anyway (Even in exception)
 - Move to live when there is no-match
- Study
 - Study UID
 - Move to live when there is no-match

Step 4 – Process failures

If matching failed, the study initially remains on the QC tab with a status of *Conflicts* to await reconciliation by the user. However, there is one more set of evaluations left to make, based on the items in the orange boxes in the following figure.

Applied Rules

- Reconciliation Mode: Pacs only site
- Emit Live Update
- Precache Study
- Precache Priors
- No. of. priors: 3
- Pick study description from DICOM
- Patient
 - Account #/Dicom Patient ID
 - Last name
 - Date of Birth
 - Move Anyway (Even in exception)
 - Move to live when there is no-match
- Study
 - Study UID
 - Move to live when there is no-match

If any of these items are present, the study status is set to *Completed* in the QC tab. Additionally, each item results in the following.

Move Anyway (Even in exception)

If duplicate matching demographics are found, or if at least one matching criterion fails, the study also appears on the ALL STUDIES tab with a status of "FIX_."

Patient: Move to live when there is no-match

The study moves to the ALL STUDIES tab even if patient demographic validation fails. Generally, this is used only when no modality worklist is available.

Study: Move to live when there is no-match

The study moves to the ALL STUDIES tab, even if no matching order is found.

Note: If "Move to live when there is no-match" is present both under Patient and Study, Exa PACS/RIS processes the study as a success.

Configure a receiver rule

You can configure receiver rules to tell Exa PACS/RIS where to place studies that it receives, and what status to assign to them. For more information, see "Understanding receiver rules."

- 1. On the burger 🔜 menu, select **SETUP**.
- 2. Next to the burger button, select the word in all caps, and then select **DICOM**.
- 3. On the **RECEIVER RULES** tab, select **ADD**.
- 4. Under **Rule Information and Filter**, enter the following settings as needed.

Setting	Description
Rule Name	Type a name for the rule.
AE Title	Use these settings as filtering criteria. For example, to evaluate the rule only against mammography studies, on the Modality dropdown list, select MG. To evaluate the rule only if the study comes from a specific AE, select one under AE Title .
Facility	
Modality	
Institution	
Status	Select the status to assign the study if it matches the rule.
Interval	Select a number of seconds to wait before moving the study from the QC tab to the ALL STUDIES tab (go live).
Trigger Routing Rules	Select to force evaluation of matching studies against routing rules.
Issuer of Alternate Account Number	Select to enable alternate account functionality. See "Use alternate account numbers."

5. Select one of the following preset buttons to assign a reconciliation mode and to add "applied rules" (matching criteria and actions to perform) to your receiver rule.

Preset Button	Reconciliation Mode	Description
PACS ONLY	PACS	Validate patient and study items against existing PACS records.
PACS/RIS	PACS + RIS	Validate patient and study items against existing PACS records and/or RIS orders.
PACS/DMWL	PACS + RIS	same
MIGRATION	PACS	Use when migrating data from another PACS. Allows everything to be received.

6. Select SAVE.

Configure matching rules

See "Work with Display Management."

Configure hanging protocols

See "Work with Display Management."

Manage jobs in the transfer and SR queues

DICOM studies that you send appear as jobs in the transfer queue. You can view and change job status and priority, cancel jobs, and requeue failed jobs.

- 1. On the burger 🔲 menu, select **SETUP**.
- 2. Next to the burger button, select the word in all caps, and then select **DICOM**.
- 3. On the **TRANSFER QUEUE** or **SR QUEUE** tab, perform any of the following tasks.

View job status

In the list of jobs, the status is listed in the CURRENT STATUS column. The available statuses are as follows.

Queued	Processing not yet started.
In-progress	Sending of data has started but not finished.
Completed	Sending of all data is finished.
Canceled	Sending of data canceled by the user. You can only cancel a job with a status of Queued.
Error	Sending was aborted due to failed association or the request was rejected by the destination.

View demographics

To view the demographics of a study in the transfer queue, select the expand + button.

Change the job priority

To change the priority of a job, select the \checkmark edit button, select a new priority, and then select **SAVE**.

View job details

To view demographics and other queue details, select the view \square button.

Cancel a job

To cancel a job, select the cancel [@] button.

Requeue a job

To *requeue* a job means to repeat or retry sending. If the status of a job is Queued, Error, Completed, or Cancelled, you can requeue the job by selecting the requeue \checkmark button. Requeued jobs remain in the transfer queue for 15 minutes before reprocessing begins.

Reprocess non-failed jobs

Rather than requeuing jobs one at a time, you can select multiple jobs for reprocessing, and then select REPROCESS SELECTED.

Reprocess failed jobs

Failed jobs are ones with a status of "Error." You can select a range of failed jobs (such as by filtering

the worklist) and reprocess them all at once.

- 1. On the transfer queue, select **REPROCESS FAILED**.
- In the date boxes, enter a date range of jobs to reprocess.
 Note: To select all dates, leave the boxes blank.
- 3. In the **AE Title** dropdown list, select the AE whose jobs you want to reprocess.
- 4. Select **REPROCESS**.

Reprint DICOM Print jobs

- 1. On the transfer queue, find a job with type **PRINT** and status **Completed**.
- 2. Right-click the job, and select **REPRINT**.

Cancel a DICOM Print job

- 1. On the transfer queue, find a job with type **PRINT** and status **Queued**.
- 2. Right-click the job, and select **Cancel**.

Configure an issuer of a PID

See "Use alternate account numbers."

Configure billing

Exa Billing uses patient and insurance information that you entered in other Exa PACS/RIS modules, but you must also enter other information directly into Exa Billing such as codes, statuses, templates, providers, and validation rules.

Configure columns on the Studies and Claims screens

You can show, hide, and reorder columns on the Studies and Claims screens. You can also configure how the studies and claims lists are sorted by selecting default columns and specifying their default sort orders.

- 1. On the burger 🔲 menu, select **Billing**.
- 2. On the top navigation bar, select **Studies** or **Claims**.
- 3. On the toolbar, select the settings 🔯 button.
- 4. In the User Settings dialog, under Column Order, do one or more of the following.
- To show or hide a column, select or clear its checkbox.
- To reorder a column, drag it to a new position in the list.
 - 5. Under **Settings**, select a default column and its default sort order.
 - 6. Select SAVE.

Add codes and other basic data

You can add codes, classes, statuses, providers, qualifiers, clearinghouses, and reasons. The basic procedure for adding these data types is as follows. For validations, templates, billing messages, and insurance mapping, see other topics.

- 1. On the burger 🔜 menu, select **Billing**.
- 2. On the top navigation bar, select **Setup** > **Adjustment Codes**.
- 3. In the left pane, select the type of data that you want to add.
- 4. In the upper-right side of the page, select ADD.
- 5. Enter the information in the dialog, and then select **SAVE**.

Configure the billing collections process

You can configure Exa PACS/RIS to automatically assign collection review status to claims meeting criteria that you enter. You can also automatically write off the balances of claims in collections.

1. On the burger 🔜 menu, select **Billing**.

2. On the top navigation bar, select **Setup** > **Collections Process**.

3. On the **COLLECTIONS PROCESS** screen, enter the following settings.

Setting	Description
Process Collections Automatically	Select to turn on automatic collections processing.
Minimum Account Balance	Type a dollar amount. If the claim balance is lower than the amount you type, it will not be processed for collections.
Collections Review Criteria	Select one or more criteria, and then type the values in the boxes.
Write off the balance when there is a claim status in Claim in Collections	Select to automatically write off the balance of claims that are in the Claim in Collections status.
Debit/Credit adjustment Code	When writing off balances, select a debit or credit adjustment code to use for the write-off.

4. Select **SAVE**.

Configure claim validation

Exa Billing validates claims by confirming that the information satisfies the requirements of various public and private health agencies (if applicable), and by checking whether you entered information in required fields. You can select which fields are required.

- 1. On the burger 🔲 menu, select **Billing**.
- 2. On the top navigation bar, select **Setup** > **Billing Validations**.
- 3. On the top of the billing validations page, select a billing method of **Electronic**, **Invoice**, or **Patient**.
- 4. In the list of fields, select the ones that you want to be required.
- 5. Select **SAVE**.

Create or edit an EDI or ERA template

You can create or edit an EDI template to format electronic claims submissions. You can also edit the ERA template.

- 1. On the burger 🔜 menu, select **Billing**.
- 2. On the top navigation bar, select **Setup** > **EDI/ERA Templates**.
- 3. On the top of the page, select EDI Template, and then select ADD.
- 4. In the **Template Creation** dialog, type a name for the template and then select **SAVE TEMPLATE**.
- 5. Below the **EDI Template** button, in the template button menu, select your template.
- 6. In the template editing area, edit the template.
- 7. To edit the ERA template, select the **ERA Template** button and then edit the template as needed.
- 8. Select SAVE.

Add billing messages

You can associate customized messages with accounts receivable codes. Billing messages print on the patient statement based on the age of the oldest claim included in the activity.

- 1. On the burger 🔜 menu, select **Billing**.
- 2. On the top navigation bar, select **Setup** > **Billing Messages**.
- 3. To find a code, enter a criterion in the **CODE** box and then select **Enter**.

4. In the list of codes, double-click a row, enter a description, and then select SAVE.

Add an insurance provider

Before you can bill an insurance provider, you must set the provider up in Exa PACS/RIS. Note that *insurance provider* in this context means any institution that can act as a payer, including insurance companies, financial firms, and attorneys.

- 1. On the burger 🔲 menu, select **SETUP**.
- 2. Select the word in all caps, and then select **Billing**.
- 3. On the INSURANCE PROVIDER tab, select ADD.
- 4. Enter the following information for the provider

Setting	Description
Code	Type your internal code for the provider.
Inactive	 Select this checkbox to: 1. Make the insurance provider unavailable in other parts of the program. 2. Make all associated patient insurance profiles unavailable in other parts of the program. 3. Set the insurance profile Valid To date to yesterday's date.
Insurance Name	Type the name of the provider.
Payer ID	Type your internal payer ID (an ID you create based on information from your clearinghouse)
[Address]	Type the address of the provider.
Phone/Fax No.	Type the primary phone and fax numbers of the provider.
Additional Phone Numbers	Type additional phone numbers, if available.
Market	Select the market that the insurance provider serves. All facilities associated with the selected market become selected in the Facilities list.
Facilities	Select the facilities where you see patients with this insurance provider.
Provider Type	Select a provider type. See "Add an insurance provider payer type."
SOP Payer	Select a source of payment code for the provider.
Fee Schedule	Select the default billing fee schedule used for the provider. See also "Configure a fee schedule."
Allowed Fee Schedule	Select the allowed fee schedule for the provider. See also "Configure a fee schedule."
Trading Partner ID	[Not used in Alberta]
Website	Type the URL to the provider's website, if available.
Insurance Provider Alerts	Type alerts as needed.

5. Select **SAVE**.

Add an insurance provider payer type

You can create insurance provider payer types.

- 1. On the burger 🔲 menu, select **SETUP**.
- 2. Select the word in all caps, and then select **Billing**.
- 3. On the INSURANCE PROVIDER PAYER TYPES tab, select ADD.
- 4. Enter your internal code and description, and then select **SAVE**.

Add a provider level code

You can create provider level codes to associate with Procedure Codes.

- 1. On the burger 🔜 menu, select **SETUP**.
- 2. Select the word in all caps, and then select **Billing**.
- 3. On the **PROVIDER LEVEL CODE** tab, select **ADD**.
- 4. Enter your internal code, description, and level, and then select **SAVE**.

Add a POS map

You can create a POS (place of service) map, primarily for use in mobile radiology workflow.

- 1. On the burger 🔜 menu, select **SETUP**.
- 2. Select the word in all caps, and then select **Billing**.
- 3. On the **POS MAP** tab, select **ADD**.
- 4. Enter your internal code, name, POS code, POS address, and Mobile Rad dispatching address, and then select **SAVE**.

Insurance mapping

Insurance mapping means to assign a billing method (such as electronic) to an insurance provider or other payer.

Prerequisite: Add an insurance provider (see "Add an insurance provider").

- 1. On the burger 🔜 menu, select **Billing**.
- 2. On the top navigation bar, select **Setup** > **Insurance Mapping**.
- 3. Double-select an insurance provider in the list.
- 4. In the **Billing Method** dropdown list, select an item, and then enter information as needed in the other fields.
- 5. Select SAVE.

Create a printer template

Exa Billing comes with templates for standard billing forms, but you can also create custom templates.

- 1. On the burger \blacksquare menu, select **Billing**.
- 2. On the top navigation bar, select **Setup** > **Printer Templates**.
- 3. At the upper-right, select **ADD**.
- 4. Optional: To base your template on the default, select **RELOAD DEFAULT TEMPLATE**.
- 5. Enter the name, template type, and margins.
- 6. In the **Template Definition** area, type the JSON code for the template. A preview of your template appears in the right pane.
- 7. Select SAVE.

Select default printer templates

You can select which templates to use by default for printing out standardized forms and customized invoices. Exa Billing comes with several templates, and you can also create your own (see "Create a printer template").

- 1. On the burger 🔲 menu, select **Billing**.
- 2. On the **Studies** or **Claims** tab, on the toolbar, select the settings without button.
- In the User Settings dialog, under Printer Template, make the following selections. Paper Claim (B&W) – The standard "black and white" claims form. Paper Claim (RED) – The standard "red" claim form. Direct Invoice – Select a template for billing insurance companies. Patient Invoice – Select a template for billing patients. Special Form - Select to use special-case forms, such as for claims in New Jersey.
- 4. Select **SAVE.**

Manage users

Administrators can configure individual users, user groups, Active Directory, and assign roles (rights) to users. In Exa PACS/RIS, you assign user roles to user groups, and then you assign user groups to individual users.



Incorrect user configuration can lead to security risks such as leaked patient information.

Create a user role

A *user role* is a named collection of user rights that you can assign to user groups. To create a user role, complete the following <u>steps</u>.

- 1. On the burger 🔲 menu, select **Setup**.
- 2. Next to the burger button, select the word in all caps, and then select User Management.
- 3. On the **USER ROLES** tab, select **ADD**, type a name and description of the role, and the select **SAVE**.

For example, type BILLING, and then select **SAVE**.

- 4. In the **User Role Permission** area, select all of the user rights that you want to assign to the user role.
- 5. Select **SAVE & CLOSE**.

Create a user group

A *user group* is a named collection of individual users to which you can assign roles and access to certain document types and areas of the program.

Prerequisite: Create <u>a user role</u>.

- 1. On the burger 🔲 menu, select **Setup**.
- 2. Next to the burger button, select the word in all caps, and then select **User Management**.
- 3. On the **USER GROUPS** tab, select **ADD**, and then enter the following settings.

Setting	Description
Group Code	Type your internal code for the group. For example, RAD.
Group Name	Type your internal name for the group. For example, Radiologist.
Group Description	Type a description for the group.
Document Types	Select the document types that group members can access. For example, select All Documents .
Roles	Select all user roles that you want the group members to have.

Setting	Description
Navigation	Select the areas of the program that group members can access (items available on the burger menu).

4. Select SAVE.

Create a user

A *user* is a member of a user group for whom you can configure custom rights and limitations in addition to those defined in user roles.

Prerequisite: Configure a user group.

- 1. On the burger 🔲 menu, select **Setup**.
- 2. Next to the burger button, select the word in all caps, and then select **User Management**.
- 3. On the **USERS** tab, select **ADD**, and the enter the following settings.

Setting	Description
Group Name	Select the user group to which the user belongs.
Name	Type the user's name.
Mobile Phone/ E-Mail	Type the user's mobile phone number and/or email address. The email address is required for two-factor authentication.
User Name	Type a sign-in user name for the user.
Login with Google	When selected, the user can sign in through their Google account.
Netcare access	Select to grant permission to access Alberta Netcare (Alberta only).
Password	Type a sign in password for the user. This field is only available the first time you configure the user.
Session Interval	Type or select the number of minutes before the user's session times out.
Allow Emergency Access	Select to assign "super user" rights to the user regardless of roles or groups.
Linked Ordering Facility	This dropdown list becomes available when you select Ordering Facility in the Linked Provider User Type dropdown list. Select ordering facilities to appear on orders the user creates in the Ordering Facility portal.
Access Expires After	Type and select a duration after which the user's account expires. Leave blank to keep the account open indefinitely.
One-Time Access	When selected, the user can sign in only one time.
User Must Change Password Next Login	Select to force the user to create their own unique password after logging on the first time.
Assign Claims to Follow-Up Queue for Another User	Select to give the user the ability to add claims to another user's follow-up queue.

Setting	Description
User Can Change Accounting Dates	When selected, the user can edit accounting dates under Billing > Payments.
Dragon 360	[reserved, do not select]
Market	Select the market that the user serves. This setting narrows search results in other parts of the program. For example, when the user searches for a patient chart, Exa PACS/RIS only returns charts of patients in the same market as the user.
Facilities	Select the facilities that the user can view and modify.
Linked Provider User Type	Select the user type if linking to one. If you select Ordering Facility, the previous Linked Ordering Facility and Ordering Facility dropdown lists appear.
Ordering Facility	Appears when you select Ordering Facility in the Linked Provider User Type dropdown list. Select the ordering facility into whose portal the user can sign in.
Search Type	(Available when Provider or Ordering Facility is selected.) Select the range of patient and other data that the user may search: full patient database, or only the associated patients in the portal.
Scheduled By	(Available when Ordering Facility is selected.) Select an option to control the dates available to the user when requesting an appointment in the ordering facility portal.

4. Select **SAVE**.

- 5. Optional.
 - To limit what the user can view on the worklist, see "Configure an administered worklist filter."
 - To view a user's devices, select the **ATTACHED DEVICES** sub-tab.
 - To restrict the user's access to specific ordering facilities, select the **USER PERMISSIONS** sub-tab.

Reset a user's password as an administrator

If a user forgets their password, an administrator can reset it or prompt the user to reset it the next time they log in.

- 1. On the burger 🔜 menu, select **Setup**.
- 2. Next to the burger button, select the word in all caps, and then select **User Management**.
- 3. On the **USERS** tab, double-click the user in the list and do one of the following.
- Select **RESET PASSWORD**, and then choose a new password for the user.
- Select the User Must Change Password Next Login checkbox.
 - 4. Select **SAVE**.
 - 5. Inform the user to sign out and then sign in again with the new password, or follow the on-screen instructions to reset their password.

Configure an administered worklist filter

In addition to user roles, administrators can use the steps below to configure worklist filters that control which studies, patients, and other information are available to individual users and user groups. Note that users can configure their own worklist filters but cannot edit filters that administrators configured for

them.

- 1. On the burger 🔲 menu, select **SETUP**.
- 2. Next to the burger button, select the word in all caps, and then select **User Management**.
- 3. On the **USERS** tab, double-click a user row to open a user.
- 4. On the **WORKLIST FILTER** sub-tab, perform one or more of the following procedures.

Configure general user worklist filter settings

You can finely control the information on the worklist to which the user has access.

- 1. In the left pane, select **GENERAL**.
- 2. Enter the following settings, and then select **SAVE**.

Setting	Description	
Show Encounters Only	Select to show only studies involving interaction between a patient and provider.	
Show DICOM Studies Only	Select to show only DICOM (imaging) studies.	
Disable Right-click on Worklist	Select to prevent the user from opening the worklist shortcut menu.	
Show RIS Orders Only	Select to show only orders from RIS.	
STAT Studies Override Current Sub-Filter	Select to always show studies with assigned STAT levels, regardless of any other filtering criteria.	
Show Assigned Studies Only	Select to show only studies to which a user is assigned.	
Deleted	Select whether to show all, only, or no (None) deleted studies.	
Configure the following settings together to compose a single filtering condition.		
Date Operations By	Select a study property against which to apply criteria. Study Date Study Received Date Scheduled Date Last Call Made Created Date	
Preformatted	Select from a list of preformatted date ranges, rather than manually entering one by using the settings described later. <i>Example</i> : Date Operations = Study Date Preformatted = Last 7 Days "If the study date falls within the last 7 days, display the study on the user's worklist"	
Last/Next	Select a time range for the selected property. <i>Example</i> : Date Operations = Study Received Date Select Last , type 8, select Week(s) "If the study was received some time during the last 8 weeks, display the study on the user's worklist."	
Date From / Date To	Select and enter a date range for the selected property.	

Setting	Description
From / To	Select and enter a time range for the selected property.

Limit access to patient information

You can limit the worklist to only display studies for patients who satisfy certain criteria.

- 1. In the left pane, select **PATIENT INFORMATION**.
- Under Patient Name, select a logic option, type the exact portion of the patient name that corresponds to the selected logic option, and then select the plus + button to add the criterion.
- 3. Under **Account No.**, perform the previous step as appropriate for the account number.
- 4. Select SAVE.

Limit access to study information

You can limit the worklist to only display studies that satisfy certain criteria.

- 1. In the left pane, select **STUDY INFORMATION**.
- 2. For each criterion, select a logic option, and then type or select a value.
- 3. For example, to display only abdominal studies, under Body Part:
 - Select the **Is** option
 - In the list of body parts, select Abdomen
- 4. Select SAVE.

Limit access to information related to specific resources

You can limit the worklist to only display studies whose resources satisfy certain criteria.

- 1. In the left pane, select **RESOURCE**.
- 2. For each criterion, select a logic option, and then type or select a value.
 - For example, to display only studies whose referring physician is Jane Doe, under Ref. Phys.:
 - Select the **Is** option
 - In the box, type JANE DOE, and then select the plus 🛨 button.
- 3. Select SAVE.

Limit access to information from specific insurance providers

You can limit the worklist to only display studies for patients who satisfy certain criteria.

- 1. In the left pane, select **INSURANCE**.
- 2. For each criterion, select a logic option, and then type or select a value. For example, to hide studies under litigation, under **Insurance Provider Type**:
 - Select the **Is Not** option
 - In the box, select Litigation, and then select the plus + button.
- 3. Select **SAVE**.

See also:

Create a user worklist filter

Manage who is online

Users with user management rights can view a list of users who are online, view a user's activity log, and terminate their session.

- 1. On the burger **menu**, select **SETUP**.
- 2. Next to the burger button, select the word in all caps, and then select **User Management**.
- 3. To view a list of current users, select the **USERS ONLINE** tab.
- 4. Optional: To view a session log for a user, select the log \square button.

View assigned studies and patients

You can view lists of studies and patients that are assigned to you (the current user).

- 1. On the burger 🔜 menu, select **SETUP**.
- 2. Next to the burger button, select the word in all caps, and then select **User Management**.
- 3. Do one or both of the following.
 - To view studies assigned to you, select the **ASSIGNED STUDIES** tab, and then select a subtab to filter by user type.
 - To view patients assigned to you, select the **ASSIGNED PATIENTS** tab.

Assign access to third-party tools

You can configure which users have access to which third-party tools, such as Updox.

- 1. On the burger 🔜 menu, select **SETUP**.
- 2. Next to the burger button, select the word in all caps, and then select **User Management**.
- 3. On the **THIRD PARTY TOOLS** tab, if the **Search users** box does not appear, select **Ungroup** users.
- 4. To select one or more users:
 - To select a single user, in the **Search users** box, type all or part of the user name, select **Ungroup** users, and then select the correct user in the list.
 - To select one or more user groups, select the **Remove All Users** button (to show the Select All Users button), select the user group to select, and then select **Select All [Group] Users**.
- 5. In the **Third Party Tools** list, select which tools to make available to the selected user or users by turning the tool's switch from off **•** to **•** on.
- 6. Optional: Edit tool configuration settings.

Configure an nVoq user account

To use nVoq for voice recognition, you must configure your nVoq user account in Exa PACS/RIS. Obtain your user account from the nVoq website.

- 1. On the burger 🔲 menu, select **SETUP**.
- 2. Next to the burger button, select the word in all caps, and then select **User Management**.
- 3. On the **THIRD PARTY TOOLS** tab, on the left side, use the group boxes to select a user.
- 4. On the right side, in the **nVoq** box, enter the user's account information.
- 5. Turn on nVoq $\blacksquare \rightarrow \blacksquare$
- 6. Click **APPLY TO SELECTED USERS**.

Copy settings from one user to another

To create new users more quickly, you can add a user and then copy settings from an existing user.

- 1. On the burger 🔲 menu, select **SETUP**.
- 2. Next to the burger button, select the word in all caps, and then select **User Management**.
- 3. On the COPY PROFILE SETTINGS tab:
 - In the **Source User** dropdown list, select the user whose settings you want to copy.
 - In the Destination User dropdown list, select a user to configure with the source user's settings, and then select the plus + button.
 - Optional. Repeat to configure additional users with the source user settings.
- 4. Select SAVE.

Configure mobile RAD

You can set up mobile radiology including vehicles, technologists, and geographical information.

See also:

Mobile billing

Configure assets for Mobile RAD

To use mobile RAD you must first configure assets by carrying out the following procedures.

- 1. Add a technologist (see "Add a resource"), and assign a schedule template to that technologist.
- 2. Configure at least one ordering facility (see "Configure an ordering facility").
- 3. Configure a place of service (see "Add a POS map").
- 4. Configure vehicles (see "Configure vehicles").

Configure vehicles

You must register in Exa PACS/RIS vehicles that you will use for Mobile RAD. Perform this procedure for each vehicle in your fleet.

- 1. On the burger 🔜 menu, select **SETUP**.
- 2. Next to the burger button, select the word in all caps, and then select Mobile RAD.
- 3. On the **VEHICLE REGISTRATION** tab, select **ADD**, and then enter the following settings.

Setting	Description
Vehicle Name	Type any name.
Make	Type the manufacturer of the vehicle.
Model	Type the model of the vehicle.
Device ID (GPS)	Type the ID number of the GPS device for the vehicle.
Color	Type the color of the vehicle.
VIN	Type the vehicle identification number of the vehicle.
License Plate No.	Type the license plate number of the vehicle.
License Plate State	Type the state of issue of the license plate.
Facility	Select facilities for which the vehicle is used.
Inspection Expiration Date	Select the date of next required inspection.
Registration Expiration Date	Select the date of expiration of the vehicle registration.
Vehicle Note	Types notes.

- 4. Under **Equipment Type**, select the plus + button, and then in the **Equipment** dialog, enter settings for each piece of radiology equipment in the vehicle.
- 5. Under **Maintenance**, select the plus + button, and then in the **Maintenance** dialog, enter vehicle maintenance information.
- 6. Under **Location**, select the plus + button and then enter settings for each location where the vehicle is parked on particular days.
- 7. Select SAVE.

Configure general settings

You can set up study forms, custom forms, templates, and queues, and perform limited database queries.

Create a study form

Study forms are interactive electronic forms that people inside and outside of your organization can use to gather or provide needed information quickly—and often automatically. Examples include consent forms for HIPPA or treatments, screening forms, pain sheets, affidavits, customer payment plans, and procedure checklists. For information on how to use forms, see "Add a study form to a patient record" and "Attach study forms."

Set up a study form

Use the following procedure to initially set up the form, and then see other topics to add and edit form contents.

- 1. On the burger 🔲 menu, select **SETUP**.
- 2. Next to the burger button, select the word in all caps, and then select General.
- 3. On the **FORM BUILDER** tab, select **ADD**.
- 4. Type a name for the form.
- 5. In the left pane, on the **ASSIGN** sub-tab, enter the following settings to define the scope of the form and filter its availability.

Setting	Description
Document Type	Select a type in order to group forms and make them easier to find.
Viewable on Patient Portal	Select to make the form available from the patient portal and in Patient Kiosk.
Auto Assign to Study	Select and then enter criteria for studies to which to automatically assign the form. Assigned forms appear in the Study Forms tab of the edit study screen, making them available to users without performing dedicated searches.
Insurance Provider Allow All with Empty Allow All without Empty	Select to restrict availability to the form to specific insurance providers. Select to make all providers available if none are specified. Select to make the field required.
Physician Allow All with Empty Allow All without Empty	Select to restrict availability to the form to specific physicians. Select to make all physicians available if none are specified. Select to make the field required.
CPT Codes Allow All with Empty Allow All without Empty	Select to restrict availability to the form for studies with specific CPT codes. Select to make available for all CPT codes if none are specified. Select to make the field required.
ICD Codes Allow All with Empty Allow All without Empty	Select to restrict availability to the form for studies with specific ICD codes. Select to make available for all ICD codes if none are specified. Select to make the field required.
Markets	The form is available to patients in, or having exams scheduled in

	the markets you select. All facilities in the selected markets become selected in the Facilities list.
Facilities	The form is available to patients in, or having exams scheduled in the facilities you select.
Modalities	Select to restrict availability to the form to studies from specific modalities.
Male Patient Only	Select to restrict availability to the form for male patients only, such as for prostate exams.
Female Patient Only	Select to restrict availability to the form for female patients only, such as for HSG exams.
Mammo Patient Only	Select to restrict availability to the form for mammography patients only.

6. Select **SAVE**.

Add a header to a study form

- 1. At the top of the FORM BUILDER tab, select the Header checkbox.
- 2. In the form area, select the word "Header."
- 3. In the left pane, on the properties tab, select CHANGE LOGO.
- 4. Browse for and select a logo, and then select **Open**.
- 5. In your form header, select the word "Header" and then replace it by typing a new field name. For example, type Study Date:
- 6. In the left pane, on the **MERGE FIELDS** tab, in the search box, type search term to look for a relevant merge field.

For example, type study.

- 7. In the list of results, double-click a merge field to add it to the form header. For example, double-click **StudyDate**.
- 8. To the right of the \$\$StudyDate\$\$ merge field, type a new field name. For example, type Patient Name:
- 9. Repeat steps 5–6 to find and add a merge field for the patient name. **Hint**: Search for "name" rather than "patient."
- 10. In the left pane, on the **PROPERTIES** tab, use the **Spacing** and **Style** controls to modify the layout.
- 11. Select Save.

Your header could look something like the following.



Study Date: \$\$StudyDate\$\$ Patient Name: \$\$Fullname\$\$ Study Description: \$\$StudyDescription\$\$

Add text fields to a study form

Use text fields to **gather typed** information from or **provide typed** information to the person filling out the form. In general, consider using:

Text Boxes to gather one-line user input

Text Areas to provide boilerplates

Free Text boxes to gather or provide information longer than one line.

The following compares the properties of text fields.

		Variable Height	Scrollable	Minimum Height	Printer Friendly	Inline Controls
Text Box	No	Yes ¹	No	1 line	Yes	Yes
Text Area	No	No	Yes	1 line	No	No
Free Text	Yes ²	No	Yes	5 lines	Yes	No

1. With **Dynamic Input** selected.

2. Font family, size, emphasis, and alignment.

To add a text field:

- 1. Drag the **Text Box**, **Text Area**, or **Free Text** button onto the form.
- Select the word "Untitled," and then in the left pane, in the Question box, type text to introduce or label the text input box. For example: For an information gathering box, type Please list all allergies.
 - For an information providing box, type Liability waiver.
- 3. If the text field is for providing information, enter the information in the box. **Adjust vertical spacing**:
- To adjust the space between the question and the box, use the Line Height slider.
- To adjust the space before and after the text field, use the **Padding** slider.
- To apply adjustments to all fields on the form at once, select **Apply Spacing to All** checkbox, and then use the sliders.
- If using a Text Box, select the following options for Inline Controls.

Setting	Description
Fit on One Line	Select to place the label one the same line as, and to the right of, the text input box.
Inline Multiple Controls	Select this option for two adjacent text boxes to place both on the same line.
Question First	Select to move the label to the left of the text input box.
Append Text Input	Select to add a new input box between the label and the original input box. This new input box is only available to the person filling out the form.
Dynamic Input	Select to fit the height and width of the text box to the text it contains.

• If using Free Text to provide information, format your text as needed by using the Style controls.

- To adjust the width of the text field, select an option in the Size dropdown list.
 - 4. Select SAVE.

Add an image to a study form

- 1. To add an image, drag the **Image** button to the form.
- 2. To give the image a title, select **Untitled**, and then type a title.
- 3. Double-click the box below the title, and then browse for and select an image file.

On the left pane, use the controls to modify the alignment and size.
 Note: If you select a size of Original, the image expands to fit the width of the page.

Add checkboxes to a study form

- 1. To add a group of checkboxes, drag the **Checkbox** button onto the form.
- 2. Select the word "Untitled," and then in the left pane, in the **Question** box, type text to label the checkbox group.

For example, type: Allergies.

- 3. Adjust the vertical **Spacing**, **Inline Controls**, and checkbox label **Style** (see "Add text fields to your form").
- 4. To add a new checkbox to the group, select **ADD ANSWER**.
- To label individual checkboxes, type labels in the boxes under <u>Answers</u>.
 For example, type Peanuts for the first checkbox, and Mold for the second.
- 6. To arrange the checkboxes in columns, select a number in the **No. of columns for Answers** dropdown list.
- 7. To add an "Other" checkbox with accompanying text input box, select the **Add Other** checkbox.
- 8. Select **SAVE**.

Add options to a study form

While checkboxes make the person filling out the form able to select more than one option, options provide an "either/or" setting. You add an option group to your form by using the same procedure as for checkbox groups, except that you drag the **Radio Button** button onto the form instead of the Checkbox button.

Add a group box to a study form

A *group box* is a named group that can contain one or more checkbox groups and/or one or more option groups. To add a group box:

- 1. Drag the **Group** button onto the form.
- 2. Select the word "Group Title," and then in the left pane, in the **Question** box, type text to label the group.
- 3. To add a background image to the group, in the left pane, select **CHANGE IMAGE**, browse for and select an image, and then select **Open**.
- 4. To divide the group into columns, in the **Grid Columns** dropdown list, select a number of columns.
- 5. To add a checkbox group or radio button group into a particular column, in the **New Control Placement** dropdown list, select the number of the column, and then drag the **Checkbox** or **Radio Button** button onto the group.
- 6. Configure the checkboxes and/or radio buttons as described in "Add checkboxes to your form."
- 7. Select **SAVE**.

Add a footer to a study form

You can add and modify footers in the same way as headers. However, we often recommend using the footer for a signature line with a signature merge field. After the person electronically signs the form, their signature appears in the location of the merge field. To create a signature line in the footer:

- 1. At the top of the FORM BUILDER tab, select the Footer checkbox.
- 2. In the form area, select the word "Footer," and overwrite it by typing Signature.
- 3. In the left pane, on the **MERGE FIELDS** tab, search for "signature" and then double-click SudyFormSignature in the list of results.
- 4. Select **SAVE**.

Export and import a study form

To save time creating a form for "Facility A," it may be helpful to import an existing form from "Facility B" and then modify it.

Export an existing study form

- 1. At Facility B, on the burger \blacksquare menu, select **SETUP**.
- 2. Next to the burger button, select the word in all caps, and then select General.
- 3. On the **FORM BUILDER** tab, select a form, and then select **EXPORT**. The form appears in the Windows Downloads folder as a JSON file.
- 4. Copy the JSON file to the computer at Facility A.

Import a study form

- 1. At Facility A, on the burger 🗐 menu, select **SETUP**.
- 2. Next to the burger button, select the word in all caps, and then select General.
- 3. On the FORM BUILDER tab, select IMPORT.
- 4. In the **Import Study Forms** dialog, select **CHOOSE FILE**, browse for and select the copied JSON file, and then select **Open**.
- 5. On the **FORM BUILDER** tab, find the new form and edit it for use at Facility A.

Create a custom form

Custom forms are non-interactive electronic forms intended for delivering information. For interactive electronic forms that can both deliver and gather information, see "Create a study form."

Set up a custo<u>m</u> form

- 1. On the burger 🔲 menu, select **SETUP**.
- 2. Next to the burger button, select the word in all caps, and then select General.
- 3. On the **CUSTOM FORMS** tab, select **ADD**.
- 4. In the **Document Name** box, type a name for the form, and then enter the following settings.

Setting	Description
Description	Type a general description.
Labels	[Unused]
Patient Review Patient Mammo Form	[Unused]
Education Material	Select to make the form available in the EDUCATIONAL MATERIAL area of the patient chart.
Reference Document	Select to make the form available in the DOCUMENTS and CUSTOM FORMS areas of the patient chart.

5. In the word processing area, type your form (see "About adding contents to a custom form").

6. Below the word processing area, under **Assign Document**, enter the following settings.

Setting	Description
Modalities	Select modalities to which to assign the custom form.
Facility	Select a facility to which to assign the custom form, and then select the add + button.

ICD Codes	Select to restrict availability for specific ICD codes.
Allow All with Empty	Select to make available for all ICD codes if none are specified.
Allow All without Empty	Select to make the field required.
Medication	Select to restrict availability for specific medications.
Allow All with Empty	Select to be available for all medications if none are specified.
Allow All without Empty	Select to make the field required.
Lab Codes	Select to restrict availability for specific lab codes.
Allow All with Empty	Select to make available for all lab codes if none are specified.
Allow All without Empty	Select to make the field required.
Male/Female/Mammo Patient Only	Select to restrict availability of the form to male, female, and/or mammography patients.

7. Select **SAVE**.

About adding contents to a custom form

The custom form word processing area provides commonly recognizable tools to type, align, and format text, and insert images and merge fields. You can copy and paste contents by using the **Ctrl+C** and **Ctrl+V** keyboard shortcuts. To change font sizes, select text that you want to resize, and then select a size in the **Font Size** dropdown list.

Add merge fields to a custom form

In this example we show you how to add a signature merge field to a custom form. You must add a signature merge field to be able to electronically sign the form.

1. In the right pane, in the **Merge Fields** area, in the search box, type search term to look for a relevant merge field.

For example, type sign.

- 2. In the list of results, double-click a merge field to add it to the form. For example, double-click **CustomFormSign**.
- 3. To the left of the \$\$CustomFormSignature\$\$ merge field, type a new field name. For example, type Signature:
- 4. Select **SAVE**.

Editing a custom form

Note: If you edit an existing form, your changes will *not* appear on forms that are already attached to a patient chart. To <u>edit</u> a form:

- 1. On the burger 🔲 menu, select **SETUP**.
- 2. Next to the burger button, select the word in all caps, and then select General.
- 3. On the **CUSTOM FORMS** tab, select the form 🖹 button of the custom form that you want to edit.
- 4. Edit the form as needed, and then select **SAVE**.

DB totals

As an alternative to reports, the DB Totals tab contains a tool for quickly searching the PACS and RIS databases with customizable queries. A DB total search tells you how many patients, studies, and images in your databases match the search criteria.

- 1. On the burger \blacksquare menu, select **SETUP**.
- 2. Next to the burger button, select the word in all caps, and then select General.
- On the DB TOTALS tab, enter the following search criteria.
 Note: If you performed a search previously during the current session, refresh your browser before entering new criteria.

Setting	Description
Date Range	Select a date range within which to search.
Study Date Study Received Date Approved Date	Select a category for the date range: Search all studies with a study date within the date range. Search studies whose DICOM receive date is within the date range. Search studies that were approved during the date range.
Facility	Filter the search by facility.
Modalities	Filter the search by modality.
Study Description	Filter the search by study description.
Institutions	Filter the search by institution.
ADD	To add a new institution to the list, clear the All checkbox, type the name of the institution in the box, and then select ADD .

- 4. To run the search, select **UPDATE TOTALS**.
- 5. The search results appear below the button under **DB Details**.
- 6. Optional. To export a more detailed report of your search and results, select CSV REPORTS.

Configure email templates

Email templates define the contents and format of emails that are automatically sent from a provider to the referring provider at the specified stage. After configuring email templates, you must turn on the emailing feature by following the procedures in "Set up emailing of exam results."

- 1. On the burger 🔲 menu, select **SETUP**.
- 2. Next to the burger button, select the word in all caps, and then select General.
- 3. On the **EMAIL TEMPLATE** tab, select **ADD**, and then enter the following settings.

Setting	Description
Template Name	Type a name for the template.
Category	Select the stage at which to send the email.
Subject	Type text to appear on the email's Subject line.
Markets	Select the market for the template. All facilities associated with the select market become selected in the Facilities list.
Facilities	The template applies to studies associated with or scheduled in the facilities you select.

- 4. Use the word processing tools to compose the body of the email.
- 5. To automatically insert exam details into the email:
 - a. In the right pane, in the search box, type a category of information (e.g. patient).
 - b. In the resultant Merge Fields list, double-click a merge field to add it (e.g. Fullname).
- 6. Select **SAVE**.

Set up emailing of exam results

You can configure Exa PACS/RIS to automatically send exam results to referring providers by email. **Prerequisite**: Configure email templates.

- 1. Configure the company's email server (under "Configure your company," see "Configure general settings").
- 2. Configure a facility, and select the facility's **Email Report Link** and/or **Email Attachment** checkboxes (see "Add a facility").
- 3. Configure a referring provider, and select provider's **Email Report Link** and/or **Email Attachment** checkboxes (see "Add a resource").

Configure notification templates

Notifications here means automatic fax or email notification from a provider to a referring provider about an exam, such as when the provider completes an approved report. When you configure a referring provider, you select whether and how to receive notifications (see "Add a resource"). In the following procedure you can create a notification template that defines the contents of the notification.

- 1. On the burger \blacksquare menu, select **SETUP**.
- 2. Next to the burger button, select the word in all caps, and then select General.
- 3. On the **NOTIFICATION TEMPLATES** tab, select **ADD**, and then enter the following settings.

Setting	Description
Template Name	Type a name for the template.
Subject	Type text to appear on the email's Subject line.
Market	Select the market for the template. All facilities associated with the select market become selected in the Facilities list.
Facilities	Select facilities to which you want to associate the template.

- 4. Use the word processing tools to compose the template.
- 5. To automatically insert exam details into the notification:
 - a. In the left pane, in the search box, type a category of information (e.g. patient).
 - b. In the resultant **Merge Fields** list, select a merge field group (e.g. **Exam Details**).
 - c. To add a merge field to the template, double-click it (e.g. PatientLocation).
- 6. Select **SAVE**.

Create fax cover sheets

You can create a cover sheet to automatically attach to faxes. You can create one cover sheet for each facility. To create a cover sheet:

- 1. On the burger menu, select **SETUP**.
- 2. Next to the burger button, select the word in all caps, and then select General.
- 3. On the **COVER SHEETS** tab, select **ADD**.
- 4. Type a name for your cover sheet, select the facility where the cover sheet will be available, and then select **SAVE**.
- 5. Use the word processing tools create your cover sheet, and then select **SAVE**.
- 6. Select **SAVE & CLOSE**.

Work with the report queue

You can open a report queue that shows reports that you previously generated or that are currently in process. You can resend (reprocess) individual reports, or reprocess them in batches.

- 1. On the burger 🔜 menu, select **SETUP**.
- 2. Next to the burger button, select the word in all caps, and then select General.
- 3. Select the **REPORT QUEUE** tab.
- 4. To resend a report, right-click it in the list and then select **Resend**.
- 5. To resend a batch of reports, at the top of the list, select **REPROCESS SELECTED** or **REPROCESS FAILED**.
- 6. To resend a report automatically at a later time, right-click it in the list and then select **Requeue**.

View logs

To view the various logs that are available in Exa PACS/RIS, do the following.

- 1. On the burger \blacksquare menu, select **SETUP**.
- 2. Next to the burger button, select the word in all caps, and then select Log.
- 3. Enter information as needed in the following tabs (AUDIT LOG, USER LOG, etc.).

Work with the dashboard

What is the Dashboard?

The Dashboard is a page that displays gadgets, which contain information in graph, table, and other formats to help you understand the status of work at your facility. The Dashboard is separate from the Dispatching Dashboard, which is dedicated to scheduling mobile exams.

Open the dashboard

• On the burger 🔲 menu, select **DASHBOARD**.

Add or remove gadgets from the dashboard

The dashboard displays an array of user-customizable *gadgets*, and a gadget with a button for adding more gadgets.

- 1. To remove a gadget, select its remove 🞽 button.
- 2. To add a gadget, find the **Add Gadget** gadget and select the add ^O button.
- 3. In the list of gadget types, select a type.

Change the graph type of a gadget

You can select a graph type of bar, column, line, or pie.

- 1. On a gadget, select the graph 📠 button.
- 2. In the button shortcut menu, select a type.

Change the facility of a graph

You can change the source facility of the graph in a gadget. The available facilities are ones that you set up in advance in Exa PACS/RIS.

- 1. On a gadget, select the facility 📕 button.
- 2. In the button shortcut menu, select a facility or select **All Facilities**.

Change the date range of a graph

You can change the date range of the data source of the graph in a gadget.

- 1. On a gadget, select the date range 🕅 button.
- 2. In the button shortcut menu, select a date range and then select **Apply**.

Work with the worklist

The worklist is the starting point for most operations in Exa PACS/RIS. The worklist is a searchable and highly customizable list of patients, studies, and series, providing full access to demographics and images.

Worklist settings

About toolbars and elements in the worklist

The worklist provides the following toolbars and other items. Notice that there is a settings menu button in both the upper and lower toolbar, but they open different menus.



1

- Tasks Shows the number of tasks by urgency. Select to jump to the Tasks list. 2 STAT meter Shows the number of studies at each STAT (urgency) level. 3 TAT meter Shows the number of studies at each TAT (turnaround time). 4 Settings Opens the settings menu.
- 5 Log off Logs off the current user.

Lower toolbar



The lower toolbar contains the following elements.

THC IO					
1	Move tabs left/right	Left/right justifies the worklist filter tabs.			
2	Filter menu	Select from any available filter tab.			
3	Refresh	Updates the worklist, but keeps manually entered filters.			
4	Refresh all	Updates the worklist, clearing all filters.			
5	Settings	Opens the PACS Actions menu.			
6	Filters	Opens the Study Filters dialog.			
7	Search tools	Shows/hides the search bar.			
8	Disagreements	Opens the disagreements queue (requires a separate license for			
		Advanced Peer Review)			
_					

Filter bar

=	WorkList				
	PRE ORDERS	QC	ALL STUDIES	DICOM	

Filter tabs appear on the left side of the worklist by their labels.

About filter tabs in the worklist

The following table describes the four types of filter tab (filters) that are available in the worklist.

Type Name Description

Permanent (Cannot be hidden)	ALL STUDIES	Lists all DICOM studies and scheduled RIS orders that are not currently on the QC tab.
Optional (Can be hidden)	PRE ORDERS	Lists unscheduled orders. Pre orders often have no referring physician, and come from the patient portal (such as exams requested by the patient).
	QC	Lists studies needing reconciliation.
User Filters (Can be hidden)	[user defined]	Provide a highly customized view of the worklist.
Temporary	TIME EXCEEDS STUDIES	When you select the Exceeds Maximum Time Limit link at the bottom of the worklist, this tab opens and lists relevant studies. Select the pushpin button on the tab to display a dialog with options, including "Remove."

Display a filter of the worklist

You can display optional filters (such as PRE ORDERS or QC) in the following two ways. To display user filters, you can use these steps if the filter was configured to appear as a tab or in the tabs list.

- 1. On the worklist, in the filter bar, select a tab to display the filter.
- 2. In the lower toolbar, select the **Show all Tabs by list** whether button, and then select a filter.

Create a user worklist filter

Exa PACS/RIS comes with the PRE ORDERS, QC, and other filters, but you can also create your own filters to customize the worklist at a high level of precision.

- 1. On the worklist, on the lower toolbar, select the filter $\overbrace{}^{\mathbb{M}}$ button.
- 2. In the **Study Filter** dialog, select **ADD**.
- 3. Enter the following criteria.

Setting	Description
Filter Name	Type a name for the filter
Show Encounters Only	Shows only studies for outpatient encounters.
Joined Filters	Selects another filter to combine with the current filter. Studies must meet the criteria in both filters to appear in the worklist.
Filter Order	Determines the order in which filters appear as tabs or list items, from low to high.
Is Private	Restricts availability of the filter to the user who created it.
Display as a Tab	Shows the tab for the filter on the worklist.
Display in Dropdown	Shows the filter in the Show Tabs by list list on the worklist.
Show Only Exceeding Max Time	Shows only studies that are exceeding their max time as specified in "Configure study statuses."
Show DICOM Studies Only	Shows only DICOM studies (studies containing images).
Show RIS Orders Only	Shows only RIS orders.
Show Assigned Studies Only	Shows only studies that were assigned to the current user.

Setting	Description
Show Pre-Orders Only	Shows only pre-orders.
Deleted	Shows all (deleted and non-deleted) studies, no deleted studies, or only deleted studies.
Assign	Available when you select Is Private. Assigns the filter to specific users or user groups.
Default Column/Sort By	Sorts the worklist by the column and order that you select.
DATE/TIME	Filters studies by a range of dates and times.
PATIENT INFORMATION	Filters studies by patient or account number.
STUDY INFORMATION	Filters studies by institution, facility, modality, body part, and other categories.
RESOURCE	Filters studies by physician or attorney.
INSURANCE	Filters studies by insurance provider.

Note: When available, you can use the **Is** operator and **Blank** criteria to search for studies that are missing information. For example, in the **INSURANCE** category, under **Insurance Provider**, select **Is**, and then select **Blank** to search for studies with no insurance.

4. Select SAVE.

Edit or delete a worklist filter

You can edit or delete a filter that you created.

- 1. On the worklist, on the lower toolbar, select the filter \mathbf{M} button.
- 2. In the **Study Filter** dialog, find the filter to edit or delete.
- 3. Select the edit \checkmark or delete \square button of the filter to delete.

Show or hide a worklist filter

You can show filters as tabs on the worklist, as items in the filter menu, as both, or as neither (you can hide them for later use without deleting them).

- 1. On the worklist, on the lower toolbar, select the filter $\overbrace{}^{M}$ button.
- 2. In the **Study Filter** dialog, double-click the filter to show or hide.
- 3. In the second **Study Filter** dialog, select or clear the **Display as a Tab** checkbox and the **Display in Dropdown** checkbox.

Select a quick filter of the pre orders tab

At the bottom of the PRE ORDERS tab, you can select from the following checkboxes to quickly filter the list of pre-orders.

Quick Filter Checkbox	Description
Waiting for Authorization	Shows only unauthorized pre-orders.
Show Only Expired	Shows only pre-orders that are past the authorization date.
Show Only Physician Orders	Show only pre-orders created from Referring Provider Portal.

Quick Filter Checkbox	Description
Show Only Ordering Facility Orders	Show only pre-orders created from the ordering facility portal.

User settings

User settings (from the worklist) control how the worklist appears and functions when the user who configured them signs in. User settings override global settings, except for security settings.

Configure columns

You can show, hide, and order columns in the worklist.

- 1. On the worklist, on the upper toolbar, select the settings button, and then in the button shortcut menu, select **User Settings**.
- 2. In the User Settings dialog, under Column Order, do one or more of the following.
 - To show or hide a column, select or clear its checkbox.
 - To reorder a column, drag the column to a new position in the list. **Note**: You can also drag columns directly on the worklist.
- 3. Select SAVE.

Configure other user settings

You can configure a variety of behaviors and settings for worklist tabs, columns and rows, and other user settings.

- 1. On the upper toolbar, select the settings button, and then in the button shortcut menu, select **User Settings**.
- 2. In the right side of the **User Settings** dialog, configure the following settings and then select **SAVE.**

Setting	Description
Show Row Number	Select to display the row number column in the worklist. The column is labeled as "#" or "No."
Show Priors	Select to show prior studies on the worklist, or clear to show series and images instead. Whether you choose to show priors or series, you can view them by selecting the expand + or collapse - button in a study row.
Show QC	Select to show the QC tab, and select the Show Completed in Pending List checkbox to show include completed orders in the QC tab.
Show Orders Tab	Select to show the PRE ORDERS tab in the worklist.
Auto-Open New Order	Select to automatically open the edit study screen after selecting the CREATE ORDER button (see "Work with scheduling").
Auto-Open Appointment Confirmation	Select to automatically open the appointment confirmation screen after selecting the CREATE ORDER button (see "Work with scheduling"). This screen provides a convenient summary to read to the patient over the phone, or to send as an email.

Setting	Description
Double-Click Behavior	The view or app in which a study appears when double-clicking a row, unless the study is scheduled.
Double-Click (Scheduled)	The view in which a scheduled study appears when you double- click it.
Default Tab	The default tab for the worklist.
Default Filter (Local Cache)	The default filter for the worklist.
Default Column	The default column for the worklist that determines the sort.
Sort By	Whether the list is sorted in ascending or descending order.
audioPlayerLagTime	The amount of delay before starting audio playback.
Auto Open Priors	Turns automatic opening of priors in the viewer on and off.
Open Prior Reports	Automatically opens prior reports when opening a study.
Voice recognition	 When opening a DICOM study in the Exa PACS/RIS viewer: Dragon (Exa Trans): Opens Dragon Naturally Speaking for radiologist transcriptions rather than Exa Dictation. You must install Exa Trans on the local workstation to use this option. Dictation (Web Trans): Opens Exa Dictation. Off (None): Does not open a voice recognition tool. nVoq (Exa Trans): Opens Exa Trans with nVoq voice recognition.
Delay Load of Exa Trans	Delays loading of the Exa Trans transcription screen, to focus attention on images before the transcription.
Exa Trans Font	Sets the font used by Exa Trans.
Exa Trans Font Size	Sets the font size used by Exa Trans.
Default Time Increment	Sets the default time increment for time blocks in the schedule book.

Viewer settings

See <u>Configure the viewer</u>.

Local service settings

See <u>Install local cache</u> in the appendix.

Use the worklist

Open the worklist

On the burger menu, select WORKLIST.
 Initially, the worklist is empty until you add filtering criteria (see "Find and view studies," and "Create a filter").

Find and view studies

You can find a study and open it to view or edit details.

- 1. In the worklist, on the **ALL STUDIES** tab, in the search bar, do one or both of the following:
 - Type or select one or more criteria in a column header and select Enter.
 - Select a column header to sort the list.

Note: For tips on searching, see "Search syntax."

2. Double-click a study in the list to open it for viewing or editing.

Open a pop-up window for physicians and ordering facilities

From the worklist, you can open a pop-up window to display the contact information of a study's physician or ordering facility.

- 1. In the worklist, find a study.
- 2. In the **REFERRING PHYSICIAN** or **ORDERING FACILITY** column, select the doctor 💩 symbol.

View priors

You can view the prior studies of any study in the worklist that includes them.

Prerequisite: In the user settings, select the **Show Priors** checkbox.

- 1. In the worklist, find a study.
- 2. On the study toolbar, select the expand + button. The priors appear in rows below the study row.

View series and images

You can view series and images of any study in the worklist that includes them.

Prerequisite: In the user settings, clear the **Show Priors** checkbox.

- 1. In the worklist, find a study.
- 2. On the study toolbar, select the expand + button.
- 3. The series appear in rows below the study row. You can double-click a series row to open the series in the viewer.
- 4. On the series row, select the expand + button.
- 5. The images in the series appear in rows below the series row.
- 6. To view a large thumbnail of an image, select the button in the image row. **Note**: To view an image thumbnail, the status must be Incomplete or Unread.
- 7. To view an image in the viewer, double-click it.

Use the study toolbar buttons

Each study on the ALL STUDIES tab or corresponding user filters of the worklist has its own toolbar on the left side of the study row. Depending on the properties of the study, one or more of the following tools are available.

Tool	Name	Description
+/-	Expand/Collapse	Expands or collapses the study row to show or hide series or priors.
	Prior	Displays a list of prior studies in a custom filter.
	Checkbox	Select to select the study for further processing by commands in the PACS Actions menu.
0	DICOM Viewer	Open the study in the Exa PACS viewer. This button is only

Tool	Name	Description
		available for studies that contain images.
۲	Opal Viewer	Open the study in the Opal viewer (requires installation). This button is only available for studies that contain images.
0	Edit	Opens the study for editing.
*	VIP	If solid green, the study is conducted on a VIP.
	View Transcription	Opens the dictation and transcription editor.
	Multi-panel	Opens the study in the multi-panel, an operating panel for working with dictation, transcription, documents, notes, and other information.
ß	Approved Report	Opens approved reports of the study.
C	External app.	Opens the current study in an external application if configured.
*	Authorization	Red star: Select to manually authorize. Green star: All insurance levels (primary, secondary, tertiary) that require authorization have been authorized. Gray star: No authorization is needed.
À	Unread DICOMs	Select to view unread images. In the Unread DICOMs dialog, select MARK AS READ, or OPEN IN VIEWER to read the images in the Exa PACS/RIS viewer.
0	Notes	Opens a screen for entering and viewing notes related to patient, study, schedule, and reason for study, and for updating the call log. The button turns blue if study notes are available.
:	Study menu	Displays the study shortcut menu (you can also right-click anywhere on the study row to display the shortcut menu).

See also:

Work with the Exa PACS/RIS viewer <u>Edit study screen</u> <u>About VIPs</u> Dictation and transcription with Exa Trans2 Manually authorize an exam Worklist shortcut menus Configure opening of a third-party program

Use the order toolbar buttons

Each order on the PRE ORDER tab or corresponding user filters of the worklist has its own toolbar on the left side of the order row. Depending on the properties of the order, one or more of the following tools are available.

Tool	Name	Description
	Select	Select to select the order for deletion.

Tool	Name	Description
100	Edit	Select to open the order in the Edit Order screen.
*	VIP	If solid green, the study is conducted on a VIP.
*	Authorization	Red star: Select to manually authorize. Green star: All insurance levels (primary, secondary, tertiary) that require authorization have been authorized. Black star: No authorization is needed.

See also: Manually authorize an exam About VIPs

Update the worklist or viewer

After performing tasks that modify studies it may be necessary to update the worklist or viewer to show changes. To do so:

• While viewing the worklist or viewer, select **F5**.

About color highlighting on the worklist

When the globe $^{\oplus}$ button for studies on the worklist is highlighted, this indicates the caching status as follows.



Caching completed

Caching in progress



Some images could not be cached

About drawing attention to orders and studies

There are several methods to draw attention to orders and studies that are of special consideration. You can use different individual or combined methods to best meet your needs. The following gives a general description of the available options.

STAT level	The medical urgency. Setting a STAT level places the study at the top of the worklist. You can edit STAT levels and descriptions, and add new ones. STAT levels drive workflows.
ТАТ	The turnaround time. Studies that are near or beyond the TAT are flagged in red and appear at the top of a radiologist's unread studies worklist.
Priority	By default you can set the priority to High, Medium, and Low, but you can edit these and add more options. Priority is primarily used to sort the worklist (on the Priority column).
Critical findings	Medical findings that you can customize. In Exa Trans, you can select critical findings in a list to send notification the referring physician.
Flag	With flags you can mark a study with a customized description that can serve as a filter. You can only assign one flag per study.

See also:

Change the urgency of a study Change the priority of an order Change the priority of a study Assign critical findings to a study Assign critical findings to an order Flag an order Flag a study

Use local caching

To use the features in this topic (except for "Prefetch studies to your local cache"), you must install local cache.

Perform a server prefetch

You can manually initiate a server prefetch from the worklist, whereby the server decompresses a study and copies it to a "local" cache on the server. If large studies will be opened in the near future, you can perform a server prefetch of those studies for faster loading.

- 1. On the worklist, select the **ALL STUDIES** tab.
- 2. On a shortcut menu of a study that contains images, hover over **Images**, and then select **Server Prefetch**.

Prefetch studies to your local cache

You can manually prefetch studies "on demand."

- 1. On the worklist, select the **ALL STUDIES** tab.
- 2. On the shortcut menu of a study that contains images, hover over **Images**, and then select **Add to My Local Cache**.

Result: The server queues the images for sending.

Prefetch studies to other local caches

- 1. On the worklist, select the **ALL STUDIES** tab.
- 2. On the shortcut menu of a study that contains images, hover over **Images**, and then select **Send to Local Cache**.
- 3. In the **Local Cache** screen, in the list of available caches, select to the left of one or more destination caches.
- 4. Do one of the following.
- To send to the selected caches, select LOCAL CACHE SELECTED.
- To send to all caches, select LOCAL CACHE ALL.

Auto-route studies to local cache

You can create a routing rule to send studies that satisfy criteria to your local cache. Complete the following procedures:

- Create an AE title for your local cache (see "Configure application entities").
- Create a routing rule for type LOCAL_CACHE, and select the AE title you created (see "Configure routing rules").

Use an on call worklist filter to locally cache studies

You can configure a worklist filter that sends matching studies to local cache.

- 1. Create a worklist filter (see "Create a filter").
- 2. On the worklist, select the settings button, and then in the button shortcut menu, select **User Settings**.
- 3. In the **Default Filter (Local Cache)** dropdown list, select the worklist filter.
- 4. Select **SAVE**.

5. On your computer, in a text editor, open the **localCache.cfg** file, located at the following path by default:

C:\Viztek\exa\cfg\localCache.cfg

6. Find the line for "oncall_enabled" and set it as follows:

"oncall_enabled": "true",

7. Save and close the file.

See also:

Install local cache

PACS Actions menu

The PACS Actions menu on the worklist provides top-level access to common functions. To open the menu, on the worklist, select the settings button on the lower toolbar. Descriptions of the commands on the menu follow.

Create a new study

• See "Schedule exams."

Schedule a walk-in appointment

• See "Schedule exams."

Burn studies to a CD or hard disk

You can burn studies to a CD or hard disk for sharing with other facilities, physicians, or patients. **Prerequisite**: Install OPAL Tools (see appendix).

- 1. Place a CD in the drive.
- 2. In the worklist, select studies whose combined size does not exceed the capacity of the disk, and then do one of the following.
- On the lower toolbar, select the settings we button, and then in the **PACS ACTIONS** menu, select **CD Burn**.
- On the study shortcut menu, select **Send**, and then select the AE title of the CD Burner in the dialog (see "Send a study.")
 - 3. In the **Opal CD Burning** dialog, enter the following settings as needed, and then select **START**.

Setting	Description
Include Viewer	Burns a viewer program onto the CD along with the studies. Required for viewing off site.
Write to Disk Only	Writes the study to the hard disk instead of a CD. Browse for and select a destination folder under Path.
Create Annotations Overlay	Converts annotations to an overlay and includes them with the images.
Compression	Specifies a compression algorithm.
Anonymize DICOM	Removes identifying patient demographics.
Remove Annotations	Omits annotations from the burned studies.
Report	Specifies a report storing method.
Burning Speed	For best results, set a speed of x4 or less.

4. After burning, test the results by opening an image from the CD using the included viewer.

Compare studies

You can open two studies of the same patient in separate viewer screens for purposes of comparison. **Prerequisite**: Disable single instance mode (see "Configure other interface settings").

- 1. In the worklist, select two studies of the same patient to compare.
- 2. On the lower toolbar, select the settings button, and then in the **PACS ACTIONS** menu, select **Compare Study**.

Merge or split studies

In Exa PACS/RIS, *merge* and *split* refer to a category of operations in which you move series and images from one study to another. Additionally, *split* refers to moving images from a study with an incorrect accession number to the correct order. There are many ways to perform merge/split operations, but the following procedures are useful examples. Moving all series and images out of a study deletes the study. As an alternative to merging studies, see "About alternate account numbers."

Move a series from one study to another study

- 1. In the worklist, select two different studies that contain series.
- 2. On the lower toolbar, select the settings button, and then in the **PACS ACTIONS** menu, select Merge/Split.
- 3. In the **Merge/Split Study** screen, in the upper-left corner, select the button once or twice to activate **Move Selected** mode.
- 4. in the **Merge/Split From** column, select the plus sign of the *first* study (the one on top) to reveal its series.
- 5. Drag the series onto the *second* study (the one on the lower-right) in the **Merge/Split To** column.

Merge/Split From			SELECT ORDE
: (Acc#: 00126) — : Standard Screening - TomoHD : 9	: ABI000137725 : Duncan, Blanca : 9	С Ф	+ : (Acc#: 00126) + : Standard Screening - TomoHD : 9
+ ?: SecurView GSPS	: PR : 12/31/1899	+	: (Acc#: R04286) : R CC C-View : 1
B MI O CAligne	• MG		

Note: As you drag over the second study, it turns green to indicate when you can release the mouse button.

6. Select **SAVE CHANGES**.

Move all images in one series to a series in another study

- 1. Repeat steps 1 through 4 in "Move a series from one study to another study.".
- 2. In the Merge/Split To column, select the plus sign of the second study to reveal its series.
- 3. Drag a series in the left column onto a series in the right column.
- 4. Select **SAVE CHANGES**.

Move one or more images from one series to a series in another study

- 1. Repeat steps 1 through 4 in "Move a series from one study to another study.".
- 2. In the **Merge/Split To** column, select the plus sign of the second study to reveal its series.

- 3. In the left column, select one or more images to select them, then drag them onto a series in the right column.
- 4. Select **SAVE CHANGES**.

Move an image from one series to another series in the same study

- 1. In the worklist select a study that has multiple series.
- 2. In the **PACS ACTIONS** menu, select **Merge/Split**.
- 3. Select the plus sign in both columns to reveal the series.
- 4. Drag an image from the left column onto a series in the right column.
- 5. Select **SAVE CHANGES**.

"Split" images into their correct order

- 1. In the worklist, select one study.
- 2. In the PACS ACTIONS menu, select Merge/Split.
- 3. In the **Merge/Split Stud**y screen, select **SELECT ORDER**, find the correct RIS order, and then select its **SELECT** button.
- 4. Drag the images to the correct order, and then select **SAVE CHANGES**.

Add a new series to a study

- 1. In the worklist, select one study.
- 2. In the PACS ACTIONS menu, select Merge/Split.
- 3. In the **Merge/Split To** column, select the new series button. **Note**: The new series is added to the bottom of the list.
- 4. On the new series row, select the edit \square button.
- 5. In the **Edit Study Info**. dialog, type a description and then select the **EDIT** button. **Note**: You can move series or images into the new series.
- 6. Select **SAVE CHANGES**.

Duplicate a study

- 1. In the worklist, select one study.
- 2. In the PACS ACTIONS menu, select Merge/Split.
- 3. In the **Merge/Split From** column, select the duplicate study Dutton. **Note**: You can move series or images into or out of the new study.
- 4. Select **SAVE CHANGES**.

See also:

Add studies to the merge queue About alternate account numbers

Import DICOM images

You can import DICOM images to a study.

Prerequisite: Install OPAL Tools (see appendix).

- 1. In the worklist, select a study into which to import images.
- 2. On the lower toolbar, select the settings button, and then in the **PACS ACTIONS** menu, select **Import Images**.
- 3. In **OpalImport**, select **Select Files/Folder or DICOMDIR to Import**.
- 4. In the **Open** dialog, browse for and select files to import, and then select **Open**.
- In **OpalImport**, configure the settings in the following table.
 Note: This is a partial list. Other settings are self-explanatory or generally unused.

Setting	Description
Do Not Compress	Select to store in DICOM Little Endian format. Clear to compress in DICOM JPEG200 Lossless format.
Overwrite	Select to overwrite any existing instances of the studies.
Opal DB Only	Select to import DICOM data only (no images).
Save before Encode	For troubleshooting purposes: Select to place the images in a folder on the server, and not update the database.
Isolate Fails	Select to place files that failed to be imported into a separate folder.
Modify Demographics	Select to reconcile demographics before import.
Max Files	Type a maximum number of files to import.
Max Size	Type a maximum data size to import.

- 6. Select Import.
- 7. Optional. If you selected the Modify Demographics checkbox, the Modify/Confirm Demographics dialog appears. Do one of the following.
- Under New Info, edit the demographics and then select MODIFY.
- Under New Info, confirm that the demographics are correct, and then select USE CURRENT.
 - 8. Select Exit.

Purge all deleted

See "Undelete or purge a deleted study."

Export the worklist

You can export the worklist to a CSV file.

- 1. On the lower toolbar, select the settings button, and then in the **PACS ACTIONS** menu, select **Export Worklist**.
- 2. In the **Export Worklist** dialog:
- Optional: In the Filename box, edit the default file name.
- Modify the name of the exported file by selecting or clearing the **Include Timestamp** and **Include Filter Name** checkboxes.
- Under Link to Download, select the link.

Worklist shortcut menus

There are two worklist shortcut menus: the order shortcut menu (for PRE ORDERS and studies in the Ordered status), and the study shortcut menu (for studies in the Unread and later statuses). The tasks you can perform by using each shortcut menu are described in the topics in this section. Note that the commands available on the shortcut menus vary depending on the order or study status and other factors.



Any errors in patient and study information resulting from incorrectly performing the procedures in this section can result in problems with data integrity. Take care to ensure that entered and imported data is correct.

Open a shortcut menu

You can open a shortcut menu by right-clicking its parent object, such as a study or order row.

Schedule an unscheduled order

If you previously entered an order (or a study with a status of "Ordered") without scheduling it, you can schedule it from the worklist.

- 1. On the worklist, find a pre-order on the **Pre Orders** tab, or an unscheduled study on the **All Studies** tab.
- 2. On the order or study shortcut menu, select **Schedule Appointment**.
- 3. In the **New Appointment** screen, filter available time slots by entering the following criteria.

Setting	Description
Distance from Patient	Type the patient's ZIP code (see next row), and then select a distance. Time slots at facilities farther from the patient than the number of miles you select are filtered out of the list.
Patient ZIP Code (Postal Code and ZIP Plus)	Type the patient's ZIP code, postal code, and/or ZIP Plus to enable the Distance from Patient filter.
Carrier	Select the patient's insurance carrier.
Appointment Type	Shows the first appointment type in the order (read-only).
Facility	Select one or more facilities where the exam could be performed.
Modality Room	Select one or more modality rooms where the exam could be performed.
Date	Select to only show time slots falling within a date range.
Start/End Time	Select to only show time slots starting within a time range.
AM/PM	Select one or both to limit your search to daytime or nighttime.
Days of the Week	Select one or more days that the patient would be available.
Additional Time	Select if the exam requires more time than the standard duration.

4. Select a time slot in the list, and then select UPDATE ORDER.

Edit an existing order

You can edit a previously entered order from the worklist.

- 1. On the worklist, select the **PRE ORDERS** tab.
- 2. On the order shortcut menu, select **Edit Order**.
- Edit the order and then select SAVE.
 Note: For details, see "Edit order information."

Change the priority of an order

You can set the priority of an order.

- 1. On the worklist, select the **PRE ORDERS** tab.
- 2. On the order shortcut menu, hover over **Priority**, and then select a priority.

Assign critical findings to an order

You can assign critical findings to an order (for example, "Acute Positive"). **Prerequisite**: Configure critical findings see "Configure reason codes."

- 1. On the worklist, select the **PRE ORDERS** tab.
- 2. On the order shortcut menu, hover over **Actions**, select **Critical Findings**, and then select a finding.

See also:

Configure your company

Flag an order

You can flag an order in the worklist as being of special consideration. You can only apply one flag to an order. Users can filter the worklist by individual study flags. To configure the flags that are available, see "Create a study flag."

- 1. On the worklist, select the **PRE ORDERS** tab.
- 2. On the order shortcut menu, hover over **Actions**, select **Flag**, and then select one or more flags.

Change the stat level (urgency) of an order

You can assign or change the stat level or urgency (Stat 1–5, or Off) of an order in the worklist.

- 1. On the worklist, select the **PRE ORDERS** tab.
- 2. On the order shortcut menu, hover over **Stat**, and then select a stat level.

Delete an order

You can delete orders from the worklist.

• On the worklist, select the **PRE ORDERS** tab.

Delete one order

• On the order shortcut menu, hover over **Exam**, and then select **Delete Study**.

Delete multiple orders

• Select the checkboxes of multiple orders, and then on the shortcut menu, select **Delete Study**.

View or attach documents to an order

You can view attached documents, or scan documents to an order.

- 1. On the worklist, select the **PRE ORDERS** tab.
- 2. On the order shortcut menu, select Attach Files.
- 3. In the **Patient Document** dialog:
- To view a document, double-click it in the list.
- To attach a document, follow the procedures in "Scan and attach paper documents to a patient," and "Scan to an order or study."

See also:

Scan to a patient Scan to an order or study

Modify or reset the order authorization days

This command lets you quickly change the number of days specified in the authorization rule associated with an exam. You can *reset* the days to the number of days set in the rule, or *modify* the days to an arbitrary number. For more information, see "Add authorization rules."

1. On the worklist, select the **PRE ORDERS** tab.

- 2. On the order shortcut menu, hover over **Actions**, and then select **Reset Authorization Days**, or **Modify Authorization Days**.
- 3. Optional. In the **Days Count** dropdown list, select a new number of days.
- 4. Select **SAVE**.

Assign a study to users

You can assign one study to one or more users, radiologists, or peer reviewers. When the user signs in, they can create a filter of the worklist that displays all studies assigned to them. This feature also works in conjunction with the "Show assigned studies only" option under Setup > User Management > [user profile] > WORKLIST FILTER.

- 1. On the worklist, select the **ALL STUDIES** tab.
- 2. On a study shortcut menu, hover over **Exam**, and then select **Assign Study**.
- 3. In the **Study Assignment** dialog, in the **Assign to User** dropdown list, select a user and then select the add + button.

Note: You can repeat this step to assign additional users.

- 4. Optional. In the **Assign Radiologist** dropdown list, select a radiologist as the referring provider.
- 5. Optional. In the **Assign Peer Reviewer** dropdown list, select a radiologist as the peer reviewer.
- 6. Select SAVE.

See also:

Assign a peer reviewer for a study

Add studies to the merge queue

You can add studies to a merge queue from the worklist, and then merge or split them by following the procedures in "Merge or split studies."

- 1. In the worklist, select the **ALL STUDIES** tab.
- 2. Optional. To start merging or splitting with one study at a time, on a study shortcut menu, hover over **Exam**, select **Merge/Split**, and then skip to the last step.
- 3. Right-click the first study, hover over **Exam**, hover over **Merge Queue**, and then select **Add to Merge Queue**.
- 4. Repeat the previous step for all studies that you want to work with.
- 5. Right-click one of the studies that you added to the merge queue, hover over **Exam**, hover over **Merge Queue**, and then select **View Merge Queue**.
- 6. Perform merge and split operations.

Create a teaching study

You can create a teaching study based on an existing DICOM study. The teaching study is anonymized.

- 1. In the worklist, find a DICOM study.
- 2. On the study shortcut menu, hover over **Images**, and then select **Create Teaching Study**.
- 3. In the **Teaching Study** dialog, in the **AE Title** dropdown list, select an **AE title**.
- 4. In the **New Value** column, type or select anonymous values for the new study, and then select **CREATE TEACHING STUDY**.

Reset a study

If the status of a study is beyond "Scheduled" in the study flow, you can reset the status to "Scheduled"

- 1. In the worklist, select the **ALL STUDIES** tab.
- 2. On a study shortcut menu, hover over **Exam**, and then select **Reset Study**.
- 3. In the confirmation dialog, select **YES**.

Delete a study

When you delete a study it remains on the worklist but Exa PACS/RIS applies strikethrough text formatting to it and disables access. You can undelete or purge a deleted study.

- 1. In the worklist, select the **ALL STUDIES** tab.
- 2. On a study shortcut menu, hover over **Exam**, and then select **Delete Study**.
- 3. In the confirmation dialog, select **YES**.
- 4. In the **Delete Reason** dialog, select a reason and then select **SAVE**.

Download approved reports

If an approved report is attached to a study, you can download the approved reports directly from the worklist.

- 1. On the worklist, select the **ALL STUDIES** tab.
- On a study shortcut menu, hover over Send Report > Download, and then select the format of the report.

Result: Exa PACS/RIS downloads the report to your Windows Downloads folder.

Assign critical findings to a study

You can assign critical findings to a study (for example, "Acute Positive").

Prerequisite: Define critical findings (see "Configure reason codes").

- 1. On the worklist, select the **ALL STUDIES** tab.
- 2. On the study shortcut menu, hover over **Actions**, hover over **Critical Findings**, and then select a finding.

See also:

Configure your company

Undelete or purge a deleted study

Undeleting a study removes the strikethrough text formatting and restores availability. *Purging* a study permanently removes it from the worklist and the database.

- 1. On the worklist, select the **ALL STUDIES** tab.
- 2. To undelete a deleted study, on the study shortcut menu, select **Restore Study**.
- 3. To purge a deleted study, on the study shortcut menu, select **Purge (Permanently)**, and then select **OK**.
- 4. To purge all deleted studies at once, on the **PACS Actions** menu, select **Purge All Deleted**.

Flag a study

On the worklist, you can add one or more flags to a study for special consideration, such as a case study. Users can filter the worklist by individual flags. To configure the flags that are available, see "Create a study flag."

- 1. On the worklist, select the **ALL STUDIES** tab.
- 2. On a study shortcut menu, hover over **Actions**, hover over **Flag**, and then select a flag.

Copy the API URL

If you need the API URL, you can copy it from the worklist.

- 1. On the worklist, select the **ALL STUDIES** tab.
- 2. On a study shortcut menu, hover over Actions, and then select Copy API URL.
- 3. A message box appears with the **API URL**.

Reset a stack

To *reset* a stack means to restore its images to their last-saved ordering. It can also be helpful to reset the stack if any problems occur when displaying it in the viewer.

- 1. On the worklist, select the **ALL STUDIES** tab.
- 2. On the shortcut menu of a study that contains images, hover over **Images** and then select **Reset Stack**.
- 3. In the confirmation dialog, select **YES**.

Lock and unlock a study

You can lock a study to warn other users attempting to open it, and to prevent other users from using transcription. You can unlock a study that someone previously locked.

- 1. On the worklist, select the **ALL STUDIES** tab.
- 2. To lock a study, on the study shortcut menu, hover over **Exam** > **Lock Study**.
- 3. To unlock a locked study, on the study shortcut menu, hover over **Exam** > **Unlock Study**.

Edit a patient, study, or order

To edit a patient, study, or order you can access the edit study screen from the worklist by selecting the Edit Study, Edit Order, or Patient Information commands on the shortcut menu. For details, see topics under "Edit study screen."

View patient Information

Use the Patient Information worklist shortcut command as a fast way to open the Patient Information tab of the edit study screen.

Change the priority of a study

You can assign or change the priority (for example, High, Low, or Lowest) of a study in the worklist. To configure priorities, see "Configure settings" under "Configure your company."

- 1. On the worklist, select the **ALL STUDIES** tab.
- 2. On the study shortcut menu, hover over **Priority**, and then select a priority.

Change the study status

You can assign or change the status (such as Approved or Transcribed) of a study in the worklist. To configure the statuses that are available, see "Configure study flow."

- 1. On the worklist, select the **ALL STUDIES** tab.
- 2. On the study shortcut menu, hover over **Change Status**, and then select a status.

Change the urgency of a study

You can assign or change the urgency (Stat 1–5, or Off) of a study in the worklist.

- 1. On the worklist, select the **ALL STUDIES** tab.
- 2. On the study shortcut menu, hover over **Stat**, and then select a stat level.

Send a study

You can send a DICOM study to PACS or another destination. To configure destinations, see "Configure application entities." You can include any approved reports in the study, but note that the report status (such as Approved or Transcribed) is not sent. To send an approved report with its status, send as XML via Opal.

- 1. In the worklist, on the ALL STUDIES tab, select one or more studies.
- 2. On the shortcut menu of one of the selected studies, select **DICOM Send**.
- 3. In the Send Study dialog, to filter the list of available AEs, type at least one character in the filter

box and then select Enter.

- 4. In the **Priority** dropdown list, select a priority.
- 5. Do one of the following.
- Select destinations in the list, and then select **SEND TO SELECTED**.
- Optional: To send any attached approved reports, select the Include Approved Report checkbox.
- 6. Optional. To manage in-process send jobs, see "Manage jobs in the transfer queue."

Send an approved report via Opal

You can send approved reports of DICOM studies to another Opal/Exa system.

Prerequisite: Ensure that the referring physician is configured on the sending server (your Exa PACS/RIS server) and receiving server. You may need to contact the receiving facility to confirm.

- 1. On the worklist, select the **ALL STUDIES** tab.
- 2. On the shortcut menu of a DICOM study, hover over **Send Report** > **Send Report via Opal**.
- 3. In the **Send Report via Opal** dialog, to filter the list of available AEs, type at least one character in the filter box and then select **Enter**.
- 4. In the **Priority** dropdown list, select a priority.
- 5. Select send destinations in the list.
- 6. Select **SEND TO SELECTED**, or **SEND TO ALL**.

Send a DICOM study report via fax or email

You can send approved reports of DICOM studies via fax or email.

- 1. On the worklist, select the **ALL STUDIES** tab.
- 2. Select one or more DICOM studies containing reports you want to send.
- 3. On the shortcut menu of one of the selected studies, hover over **Send Report** and then:
- To fax to the default recipient, select it. The report is sent to the fax queue.
- To send to selected recipients, select Fax/Email.
 - 4. In the **Send Report** dialog, select the recipient types and individual recipient, and then select the **SEND FAX** and/or **SEND EMAIL** button.
 - 5. Optional. Repeat the previous step to send to additional recipients.

View and export audit logs

You can view audit log entries, and export them to an XLS file.

- 1. In the worklist, on the study or order shortcut menu, select **Log**.
- 2. In the **Activity Log** screen, select a date range for the log entries to view, and then select **RELOAD**.
- 3. If any entries match the date range, they appear in the list.
- 4. Optional. To export an entry from the list, select it and then select **EXPORT TO EXCEL**.
- 5. To view information in a log, double-click the log entry in the list.

View documents attached to a study

You can view documents that are attached to a patient record.

- 1. In the worklist, select the **ALL STUDIES** tab.
- 2. On the study shortcut menu, select **Attach Files**.
- 3. Optional. To find a document, do one of the following.
- To show all available documents, select the **Show All Documents** checkbox.
- Use the search bar to find a document by type, source, or other criteria, and then select **RELOAD**.
- To view a document in the list, double-click it.

About linking patients

Linking patients means to merge patients to the master patient record by using alternate account numbers (see "About alternate account numbers"). You can link patients from the worklist by following the procedure in "Link patients," or from the patient chart by following the procedures in "Use alternate account numbers." Note that the Link Patient procedure allows you to create a new account number "on the fly" whereas the other method does not.

Generally, you can use *linking* to merge patients, and use *merging* to move studies, series, and images between patients.

Link patients

If a patient has multiple records, each with different account numbers (or MRNs or PIDs), you can link them from the worklist.



Linking an external patient record to an internal one results in deleting the external record. **Prerequisite**: Perform the procedures under "Configure alternate account number functionality."

- 1. On the worklist, on the shortcut menu of a study whose patient you want to link, select Link Patient.
- 2. In the **Link Patient** dialog, in the **Alt Account No** search box, type the exact account number to link to the current account number, and then select **Enter**.
- In the Issuer dropdown list, select the issuer of the PID, and then select ADD.
 Note: If the account number was found (it already exists in Exa PACS/RIS), a message appears. Type a different number or select a different issuer.
- 4. Select **SAVE**.

See also:

About linking patients Configure alternate account number functionality

About attaching documents to patients, orders, and studies

The following is a list of topics in this manual that describe how to attach information to patients, orders, and studies.

- Upload a DICOM file to a study Attach existing DICOM files to a study.
- Scan to a patient Scan paper or forms to a DICOM file and attach to the Documents section of the patient chart.
- Scan to an order Scan paper or forms to a DICOM file and attach to all studies in an order.
- Scan to a study Scan paper or forms to a DICOM file and attach to a selected study.

Upload a DICOM file to a study

You can upload DICOM-compatible files and add them to a study.

- 1. In the worklist, on the shortcut menu of a DICOM study, hover over **DICOM Upload** and then select **Upload File**.
- 2. In the **DICOM Upload** dialog, do the following.
 - a. Select a series description.
 - b. Select **SELECT FILES**, navigate to a file to upload, and then select **Open**.
 - c. Select **UPLOAD**.

Open the call log

You can use the call log to save a record of communication to and from a patient regarding an appointment or order.

• In the worklist, on the shortcut menu of a DICOM study, select **Call Log**. The **Notes** tab of the patient chart opens. See "Update the patient call log."

Scan to a patient

You can scan paper documents and forms, and attach them to the patient chart. Exa PACS/RIS converts the scans to a DICOM-compatible format.

Prerequisite: Connect a TWAIN-compliant scanner, and install Exa Scans.

- 1. In the worklist, on the study shortcut menu of an unread study, select Attach Files.
- 2. In the **Patient Documents** screen, select a document type.
- 3. Place a document in the scanner, and do one of the following.
- To scan without scanning options, select the QUICK SCAN arrow button, and in the shortcut menu, select QUICK SCAN TO PATIENT.
- To scan with scanning options, select the QUICK SCAN arrow button, and in the shortcut menu, select FULL SCAN TO PATIENT.
- To upload the scan to the patient chart, select **UPLOAD**, and then in the second **Patient Document** dialog, do the following.
 - $\circ\,$ Enter metadata for the document.
 - $\circ\,$ Select SELECT FILES, navigate to and select a file, and then select Open.
 - 4. Select SAVE.

See also:

Install Exa Scans

Scan to an order or study

You can scan an image to a DICOM file and attach the file to one or all studies in an order.

- 1. On the worklist, select the **ALL STUDIES** tab.
- 2. On the study shortcut menu, do one of the following.
- To scan to the study, hover over DICOM Upload and then select Scan to Study.
- To scan to all studies in the order, hover over DICOM Upload and then select Scan to Order.

Edit study screen

The edit study screen enables you to view or edit most information about an order or study. To open the edit study screen, select the edit 🖉 button in a worklist study row. The topics in this section describe all of the tasks you can complete in the edit study screen.

Technologists: For you, selecting the edit button opens the Exam screen for technologists (see "Exam screen for technologists").

test, tension (Acc#:test2249), 2021-04-05, F, 3M		
SUMMARY		
EXAM INFORMATION	ORDER	4884
PATIENT INFORMATION		
CHARGES/PAYMENTS		
PATIENT PAYMENT HISTORY	Order No.	104399
EXAM INFORMATION PATIENT INFORMATION CHARGES/PAYMENTS		

The upper left corner of the edit study screen

When working in the edit study screen, ensure that you enter all information correctly and with correct spelling. Incorrect information can result in failure to find patient records in future operations.

View patient alerts

You can view summary of patient alerts.

- 1. In the worklist, select the edit \checkmark button of a study.
- 2. At the top of the edit study screen, select the alert Δ button.

View a summary of an order

You can view a summary of an order and its studies.

- 1. In the worklist, select the edit \checkmark button of a study.
- 2. In the edit study screen, on the left pane, select **SUMMARY**.

Edit order information

An *order* defines information for one or more studies. You can edit properties of an order.

- 1. In the worklist, select the edit \checkmark button of a study.
- 2. In the edit study screen, on the left pane, select **EXAM INFORMATION**.
- 3. Near the top of the screen, select the **ORDER** sub-tab and make changes to the following settings.

Setting	Description
Facility	The facilities performing the studies (to change, reschedule).
Modality	The modalities used for the studies (to change, reschedule).
Resource	The resources used for the studies (to change, reschedule).
Ordering Facility	Select the ordering facility or location of the studies.
Patient Location	Select the current location of the patient.
Patient Room No.	Type the room number of the patient location.
Patient Condition	Select a patient condition to consider for studies (such as "wheelchair").
Source	Select the source of the patient (such as referral or previous medical facility).
Place of Service	Select the place of service for billing purposes (Box24B).

Setting	Description
Supervising Physician	Select the supervising physician (Medicare requires a supervising physician to be present in the department or location during the exam).
Functional Status	Select the patient's functional status.
Cognitive Status	Select the patient's cognitive status.
Transition of Care in	[Unused]
Patient Visit No.	The enterprise-specific serial number for the study.
SDE Study	Select the checkbox if the order contains an echo ultrasound-related study.
Schedule Notes	Type or select schedule notes (such as messages from the front desk).
Justification of Mobile Service	Type the justification of mobile service for reference by the physician.
Technologist	Select the technologist performing the studies.
Discharge Instructions	Type any discharge instructions.
Physician Order Status	Status from the Referring Provider portal.
PRINT ORDER	To print a summary of the order information, select one or more of the following options, and then select PRINT ORDER.
Include Disclaimer/ Signature Area	Includes a pre-configured disclaimer to be signed by the patient.
Include Notes	Includes schedule and study notes on the printed order.
Include Barcode Page	Prints a barcode on the order.

- 4. If DICOM fields are not available to edit, at the bottom of the screen, select **DICOM STUDY**, and then make changes to DICOM fields as needed.
- 5. To edit or add CPT codes, at the bottom of the screen, select the edit 🖉 or add 🛨 button, enter changes, and then select **SAVE.**
- 6. Select **SAVE.**

Edit study information

You can edit properties of an ordered <u>stu</u>dy, including DICOM fields and CPT codes.

- 1. In the worklist, select the edit \checkmark button of a study.
- 2. In the edit study screen, on the left pane, select **EXAM INFORMATION**.
- 3. Near the top of the screen, select a study sub-tab (labeled with the accession number) and make changes to the following settings.

Setting	Description
Order No.	The order number to which the study belongs (to change, reschedule).

Setting	Description
Accession No.	The accession number of the study (users with rights can edit here).
Study UID	The study UID as determined by the selected appointment type.
Date	The date of the study (to change, reschedule).
Study Status	The current status of the study in the Exa PACS/RIS study flow.
Body Part	Select the relevant body part for the study (for example, hand).
Orientation	Select which side of the body (for example, right).
Appointment Type	Select the study's appointment type (the type of exam for scheduling purposes).
Code	The internal procedure code of the study (associated with the appointment type).
Modality Room	The modality room where the study is performed (to change, reschedule).
Originating Facility	Select the Alberta-recognized originating facility.
Originating Location	Select the originating location.
Hospital Admission Date	Select date the patient was admitted for the hospital stay during which the study was performed.
Teeth	[unused]
Nature of Injury	For employment related injuries, select the WCB nature of injury.
Area of Injury	For employment related injuries, select the WCB area of injury.
Reason	Type the patient-specific reason for performing the study.
Study Notes	Type or select study notes (such as basic study history or notes from technologist to radiologist).
Diagnosis Codes	Select diagnosis (e.g. ICD10) codes for the study.
Referring Physician	Select the physician who referred the patient for the study.
Ordering Physician	Select the physician who ordered the study. If left blank, Exa PACS/RIS automatically enters the referring physician.
Reading Physician	Select the radiologist or other physician who will read the study.
Attorney	Select the attorney for the patient. This attorney is given access to the study through Attorney Portal.
Department	Type the department of the facility performing the study.
Institution	Type the institution of the facility performing the study.
Station	Type an identifier for the station of the location performing the study.

4. If DICOM fields are not available to edit, at the bottom of the screen, select **DICOM STUDY**, and then make changes to DICOM fields as needed.

- 5. To edit or add CPT codes, at the bottom of the screen, select the edit 🖉 or add 🛨 button, enter changes, and then select **SAVE.**
- 6. Select **SAVE.**

Change an authorized appointment

The following feature is not available on all installations.

Appointment types contain one or more CPTs. If you change a study's appointment type from one that has only one CPT to another than also has only one CPT, Exa PACS/RIS automatically copies any authorization information from the original CPT to the new one. However, if the old and/or new appointment type have multiple CPTs, Exa PACS/RIS enables you to the copy insurance authorization information from selected CPTs in the original appointment type to any matching CPTs in the new one.

- 1. On the worklist, select the edit dutton of a study that has an appointment type with multiple CPTs, one or more of which are authorized.
- 2. On the Edit Study screen, select EXAM INFORMATION, and then select a study tab.
- 3. In the **Appointment Type** dropdown list, select a different appointment type.
- 4. In the **Change Appointment Type** dialog, to copy authorization information, select **YES**.
- 5. In the **Authorization** screen, select the **COPY** button of any CPTs whose authorization information you want to copy.
- 6. Select **SAVE**.

Edit basic patient demographics

The edit study screen gives you convenient access to some patient demographics in the patient chart.

- 1. In the worklist, select the edit \checkmark button of a study.
- 2. In the edit study screen, on the left pane, select **PATIENT INFORMATION**.
- 3. Make changes, and then select SAVE.

See also:

Create and modify a patient chart

Add or edit a patient's portal account

You can edit a patient's portal credentials and other account information. See also "Work with Patient Portal."

- 1. In the worklist, select the edit \square button of a study.
- 2. In the edit study screen, on the left pane, select **PATIENT INFORMATION**.
- 3. At the top of the **Patient Information** area, select **PORTAL ACCOUNT**.
- 4. In the **Create Portal Account** dialog, do the following.
 - a. Under **Patient Account**, edit fields as needed.
 - b. Under **Representative Account**, to assign a representative account (such as for a relative), select the account in the dropdown list.
 - c. To create a new representative account, select the plus + button, fill in the fields and select the save button.
 - d. Select **CREATE**.
- 5. Select SAVE.

Reset a patient portal password

You can send a link to a patient, or the patient's representative, that enables them to reset their patient portal account password. This reset feature is only available if the email address has been verified, and the account is unlocked. See also "Work with Patient Portal."

- 1. In the worklist, select the edit \checkmark button of a study.
- 2. In the edit study screen, on the left pane, select **PATIENT INFORMATION**.
- 3. At the top of the **Patient Information** area, select **PORTAL CREDENTIALS**.
- 4. In the **Create Portal Account** dialog, under **Patient Account** or **Representative Account**, select **RESET**.

Scan a patient's driver's license

You can search for a patient by the name and DOB on their driver's license. If Exa PACS/RIS finds a matching patient in the system, it opens a dialog in which you can reconcile that record against the information on the license. If it does not find a matching patient, it uses the information on the license as a basis for you to create a new patient.

- 1. In the worklist, select the edit \square button of a study.
- 2. In the edit study screen, on the left pane, select **PATIENT INFORMATION**.
- 3. At the top of the Patient Information area, select SCAN LICENSE.
- 4. When the **Scan License** dialog appears, scan the driver's license.
- 5. Relevant information appears in fields.

View and print a patient statement from a claim inquiry

You can view and print a patient statement from the claim inquiry.

- 1. In the worklist, select the edit \checkmark button of a study.
- 2. In the edit study screen, on the left pane, select **PATIENT INFORMATION**.
- 3. At the top of the **Patient Information** area, select **INQUIRY**.
- 4. Optional. In the **Patient Claim Inquiry** dialog, select **PRINT**. A printable claim summary appears in a separate browser window.

Generate a patient check-in code

To facilitate patients checking in for their appointments through Patient Kiosk, you can either configure a patient portal account (see "Add or edit a patient's portal account,") or provide them with a check-in code.

- 1. On the worklist, on the **PRE ORDERS** tab, open an order.
- 2. In the edit study screen, on the left pane, select **PATIENT INFORMATION**.
- 3. Select CHECK-IN CODE.
- 4. Send the code to the patient by using email, phone, or other means.

Export a patient CCD

A patient CCD (continuity of care document) contains medical information that you can send to other providers without loss of meaning. You can export the information, download it to your Windows Downloads folder, and send it to an email recipient.

- 1. In the worklist, select the edit \checkmark button of a study.
- 2. In the edit study screen, on the left pane, select **PATIENT INFORMATION**.
- 3. At the top of the Patient Information area, select EXPORT CCD.
- 4. In the **Export CCD** dialog, select type and encryption functions.
- 5. Select **PROCESS PATIENT INFO**, and then select **DOWNLOAD**.
- 6. To send the zipped file, select **SEND** and follow the on-screen instructions.

Enter a new charge

You can modify charges from the edit study screen. For more details on entering charges, see also "Work with billing."

1. In the worklist, select the edit \checkmark button of a study.

- 2. In the edit study screen, on the left pane, select CHARGES/PAYMENTS.
- 3. Select **NEW CHARGE**, and then select a service code and service description.
- 4. Optional. Select **Verify**.
- 5. Select **SAVE.**

Enter payments and print receipts

You can enter payments, print receipts, and create an invoice for the balance due from the edit study screen. For more details on entering payments, see "Work with billing."

- 1. In the worklist, select the edit \checkmark button of a study.
- 2. In the edit study screen, on the left pane, select CHARGE/PAYMENTS.
- 3. Select NEW PAYMENT, enter payment information, and then select SAVE.
- 4. Optional. To print a receipt, select **PRINT RECEIPT**.
- 5. Select **SAVE.**

View payment history and print receipts

You can view a history of payments made on behalf of the current patient, and print receipts.

- 1. In the worklist, select the edit \checkmark button of a study.
- 2. In the edit study screen, on the left pane, select **PATIENT PAYMENT HISTORY**.
- 3. Select a payment for which to print a receipt, and then select **PAYMENT RECEIPT**.

Add an insurance profile

An insurance profile contains all relevant information about an insurance policy.

- 1. In the worklist, select the edit \checkmark button of a study.
- 2. In the edit study screen, on the left pane, select **INSURANCE PROFILE**.
- 3. In the editing pane, select **ADD**, and then enter the following settings.

Setting	Description
Level	Select whether the insurance is the patient's primary, secondary, or tertiary policy.
Existing Insurance	If insurance was entered for the patient previously, you can select it here to automatically fill in other fields.
Insurance Carrier	Select the insurance carrier.
Insurance Provider Type	Entered automatically.
Policy Number	Type the patient's insurance policy number.
Group No.	Type the insurance group number of the policy.
Pre-Cert. Phone / Fax	Type contact information getting pre-certification.
Accept Assignment	Select if the insurance policy can accept assignments.
Address / Phone No.	The contact information of the insurance carrier.
Website	The website of the insurance carrier.
Valid From/To Date	Select the period during which the current policy is effective.
Relationship	Select an emergency contact person for the patient.
Subscriber Name	Type the name of the insurance policy subscriber.

Setting	Description
Sex	Select the sex of the subscriber.
Country / Address	Select the country and type the address of the subscriber.
DOB	Select the date of birth of the subscriber.
Employee Status	Select the employment status of the subscriber.
Work / Home Phone	Type the phone numbers of the subscriber.

Edit an insurance profile

The fields and features available when editing an insurance profile are different that when adding one. You can edit main insurance information, while simultaneously authorizing an exam.

- 1. In the worklist, select the edit \checkmark button of a study.
- 2. In the edit study screen, on the left pane, select **INSURANCE PROFILE**.
- 3. Select the edit 🖉 button of the insurance profile to edit, and then edit the following settings (unavailable settings are not included in the table).

Setting	Description	
Insurance Carrier	Select the insurance carrier.	
Policy Number	Type the patient's insurance policy number.	
Group No.	Type the insurance group number of the policy.	
Accept Assignment	Select if the insurance policy can accept assignments.	
Benefit On Date	Select the date on which the policy becomes effective.	
Verify	Select to check eligibility for the study.	
Valid From/To Date	Select the period during which the current policy is effective.	
Relationship	Select an emergency contact person for the patient.	
Subscriber Name	Type the name of the insurance policy subscriber.	
Sex	Select the sex of the subscriber.	
Country and Address	Select the country and type the address of the subscriber.	
DOB	Select the date of birth of the subscriber.	
Employee Status	Select the employment status of the subscriber.	
Work / Home Phone	Type the phone numbers of the subscriber.	

- 4. Near the top of the screen next to "Insurance Details," select **SAVE**.
- 5. Under **Authorization**, continue by entering the following settings.

Setting	Description
Study CPT	Select the CPT of the patient's study needing authorization.

Setting	Description
Referral Number	Type the referral number of the study needing authorization.
Note / Reason	Type notes and reasons for the study needing authorization.
Authorization No.	When authorized, type the authorization number.
Expiration / Effective / Issue Date	Select authorization dates.
Accident Date	Select the date of the accident, if applicable.
Accident Type	Select the type of accident.
Accident State	Select the state or province in which the accident occurred.

Select SAVE, and then select one of the following.
 PENDING – Place the exam in Pending authorization status
 DENIED – Deny the exam.

View or add patient documents

You can view all documents attached to a patient record and their metadata, and add new documents.

- 1. In the worklist, select the edit \checkmark button of a study.
- 2. In the edit study screen, on the left pane, select **DOCUMENTS**.
- 3. To view a document in the list, double-click it.
- 4. To add a document, place the document in the scanner, and do one of the following.
- 5. To scan one page without scanning options, select **QUICK SCAN**.
- 6. To scan with scanning options, select the **QUICK SCAN** arrow button, and in the shortcut menu, select a scan type.
- 7. To upload the scan to RIS, select **UPLOAD**, or select the arrow button for a patient level document, and then in the second **Patient Document** dialog, do the following.
- Enter metadata for the document.
- Select SELECT FILES, navigate to and select a file, and then select Open.
 - 8. Select SAVE.

View approved reports

- 1. In the worklist, select the edit \square button of a study.
- 2. In the edit study screen, on the left pane, select **APPROVED REPORTS** to open a window and display the report.

Open the transcription screen

Use this procedure to open the transcription multi-panel from the edit study screen. For more advanced features, see "Dictation and transcription with Exa Trans2."

- 1. In the worklist, select the edit \checkmark button of a study.
- 2. In the edit study screen, on the left pane, select **TRANSCRIPTION** to open a window and display the transcription editor within the multi-panel.

Manage other physicians

You can add or delete other physicians (ones other than the primary, referring, or reading physicians) who are associated with the current study.

- 1. On the worklist, select the edit dutton of a study.
- 2. In the edit study screen, on the left pane, select **OTHER PHYSICIANS**.
- 3. Optional. To add a physician, in the Select Other Physician dropdown list, select a physician.
- 4. Optional. To remove a physician, select the trash 🔳 button.

Enter notes and reason for study

You can enter patient notes, study notes, schedule notes, and reasons for the patient's studies. Generally, you can use: *patient notes* for patient specific information; *study notes* for basic study history or notes from technologist to radiologist; *schedule notes* for messages from the front desk; and *reason notes* for more specific study history.

CAUTION: Notes are permanent, and may be visible to the patient.

- 1. In the worklist, select the edit \square button of a study.
- 2. In the edit study screen, on the left pane, select **NOTES**.
- 3. Select the **PATIENT NOTES**, **STUDY NOTES**, or **SCHEDULE NOTES** sub-tab.
- 4. Select ADD, type notes, and then select SAVE.
- 5. Select the **REASON FOR STUDY** tab.
- 6. Type reasons in the box, and then select **SAVE.**

Update the patient call log

You can use the call log to save a record of communication to and from a patient regarding an appointment or order. The worklist has columns for displaying the following information that you enter in the call log: last call made, last call category, and last call notes. To add call categories, see "Configure app settings." To update the call log:


- 1. In the worklist, select the edit dutton of a DICOM study.
- 2. In the edit study screen, on the left pane, select NOTES.
- 3. On the **CALL LOG** sub-tab, select **ADD**.
- 4. In the **Call Category** dropdown list, select a call category.
- 5. In the **Call Note** box, type notes, and then select **SAVE**.

Enter employment and transfer-related information

You can enter various information on whether the illness or injury was employment-related, the dates of illness, work absence, and hospitalization. You can also enter information related to the source of a transferred patient. In the Alberta, Canada configuration, this information automatically appears on claims for this study.

- 1. In the worklist, select the edit \square button of a study.
- 2. In the edit study screen, on the left pane, select **ADDITIONAL INFORMATION**.
- 3. Enter the information as needed and then select SAVE.

Assign or remove patient alerts



You can assign or remove alerts for a patient.

- 1. In the worklist, select the edit \square button of a study.
- 2. In the edit study screen, on the left pane, select **PATIENT ALERTS**.

- 3. Select or clear the checkboxes corresponding to the alerts that you want to assign or remove.
- 4. Optional. To create a new alert, type it in the **Custom Alerts** box and then select the plus + button.
- 5. Select **SAVE.**

View problems

You can view problems associated with the study.

- 1. In the worklist, select the edit \checkmark button of a study.
- 2. In the edit study screen, on the left pane, select **PROBLEMS**.

View prior studies and add a new study

You can view a list of prior studies for a patient, and view reports attached to the priors. You can also start the workflow to add a new study from this part of the edit study screen.

- 1. In the worklist, select the edit \checkmark button of a study.
- 2. In the edit study screen, on the left pane, select **STUDIES**.
- 3. Optional. If a prior study includes reports, select the reports ¹ button on the study row to open the reports.
- 4. Optional. To add a new study, select NEW STUDY and then see "Schedule exams."

About custom forms and study forms

Custom forms have basic formatting options, and cannot accept electronic signatures. *Study forms* have more advanced formatting options, and can accept electronic signatures.

Add a custom form to a patient record

You can open a custom form template, fill it out, save the completed form to the current patient record, sign it electronically, fax, and print it.

- 1. In the worklist, select the edit \checkmark button of a study.
- 2. In the edit study screen, on the left pane, select **CUSTOM FORMS**.
- 3. In the **Select Custom Forms** dropdown list, select a form to add it to the forms table.
- 4. Select the form button in the table to open it, edit it as necessary, and then select **SAVE**.
- Optional. To add an electronic signature, select SIGNATURE, enter signature information, sign by drawing with the mouse, and then select SAVE.
 Note: To make electronic signatures available, add a signature merge field when setting up the form.
- 6. Optional: To print the form, select **PRINT**.
- 7. Optional: To fax the form, select **FAX**, select the recipient physician, enter optional information under **Other**, and then select **SEND FAX**.

Add a study form to a patient record

You can open a study form template, fill it out, save the completed form to the current patient record, sign it electronically, and print it. You can also make forms available on the patient portal so that they can fill them out before an appointment.

- 1. In the worklist, select the edit \square button of a study.
- 2. In the edit study screen, on the left pane, select **STUDY FORMS**.
- 3. In the **Select Study Forms** dropdown list, select a form to add it to the forms table.
- 4. Double-click the form in the table to open it, edit it as necessary, and then select SAVE.
- 5. Optional. To add an electronic signature, select **ADD SIGNATURE**, enter signature information, sign by drawing with the mouse, select **SAVE** or **SAVE TO PATIENT DOCUMENTS**, and then close the signature dialog.

- 6. Close the form.
- 7. Optional: To print forms in the list, select their checkboxes and then select **PRINT SELECTED**.
- 8. Optional: In the forms table, next to the **Patient Portal** column header, select the checkbox to make the forms available in the patient portal.

See also:

Draw on a study form image

Draw on a study form image

While filling out a form, you can draw basic shapes on any images included in the form.

- 1. In the **Edit study** screen, open a study form (see "Add a study form to a patient record").
- 2. Hover over an image on the form to display the drawing toolbar.



1 2 3 4 5 6 7

- 3. Do any of the following:
- Select **Color Picker** (7) and then select a color.
- Select **Rectangle** (2), **Ellipse** (3), or **X-Stamp** (4), and then drag on the image to place the shape.
- To edit a shape, select **Select** (5), select the shape, and then drag to move the shape, or drag the shape's handles to resize.
- To delete selected shapes, select them and then select **Delete** (6).
- To delete all shapes, select **Clear** (1).

Specify a follow-up exam

If a patient needs a follow-up exam, you can specify the need for the follow up and the general time frame. To schedule follow-up exams, see "Schedule a follow-up."

- 1. In the worklist, select the edit \checkmark button of a study.
- 2. In the edit study screen, on the left pane, select FOLLOW UP.
- 3. In the **Follow Up** column, select a reason for the follow-up.
- 4. In the **Next Follow-Up** column, select a time horizon for the follow-up.
- 5. Select **SAVE.**

Refer a patient

You can refer a patient to a provider, and view existing referrals.

- 1. In the worklist, select the edit \square button of a study.
- 2. In the edit study screen, on the left pane, select **REFERRALS**.
- 3. In the upper-right part of the editing pane, select **ADD**.
- 4. Enter referral information and then select **SAVE.**
- 5. To send the referral to the provider, select **SEND**, enter message information and attach documents, and then select **SEND**.

View activity logs

You can view a log of program activity and export the log to Excel.

- 1. In the worklist, select the edit \checkmark button of a study.
- 2. In the edit study screen, on the left pane, select **ACTIVITY LOG**.
- 3. Change the range of dates to filter the activity that you want to view.
- 4. Optional. To export the longs, select **EXPORT TO EXCEL**.

Exam screen for technologists

Technologists, users linked to a technologist, and facility administrators can automatically open a technologist-specific version of the Exam screen that helps them work more efficiently.

Link a user to a technologist

You must link a user to a technologist resource to enable that user to view the exam screen for technologists.

Prerequisite: Add the Technologist right to the user's user role (see "Create a user role").

- 1. On the burger 🔲 menu, select **SETUP**.
- 2. Next to the burger button, select the word in all caps, and then select **Providers & Resources**.
- 3. On the **RESOURCE** tab, create a technologist resource, or open an existing one.
- 4. On the LOGIN DETAILS sub-tab, select the user to link to the technologist, select LINK USER.

Use the exam screen for technologists

Prerequisite: Link the current user with a technologist (see "Link a user with a technologist"). Sign in to Exa PACS/RIS as a technologist.

- 1. To open the exam screen for technologists (the Technologist screen), open a worklist study for editing in the usual manner (open the edit study screen).
- 2. Proceed with technologist workflow in the Technologist screen. The screen is self-explanatory, but note the following major features.
- Information fields In the left pane, edit information in all fields as necessary.
- **TECH START/PAUSE/END** buttons Select TECH START and TECH END upon starting and ending the exam. You can select TECH PAUSE when an exam is interrupted, such as by a difficult patient. Exam duration statistics are recorded based on the times these buttons are selected, and used in reporting.
- UNREAD Select to reset the study's status to Unread.
- Notes You can select Study Notes, Schedule Notes, Patient Notes, or Reason for Study, type notes in the box, and then select SAVE.
- Documents Select to view or add documents to the study.
- Studies Select to view a list of prior studies for the current study.
- Study Forms Select to add, edit, or delete study forms from the study.
- ABORT Select to abort the study.
- ADD CHARGES Add new charges to an exam (see, "Add charges in the Technologist screen").

Add charges and NDCs in the exam screen for technologists

Technologists can add charges to an exam if needed for such things as when contrast is used. The charges correspond to CPT codes, and any associated NDC codes.

- 1. Open a study in the Technologist screen (see "Use the exam screen for technologists"), and then select **ADD CHARGE**.
- 2. In the Add Additional Charges dialog, select ADD CHARGE.
- 3. In the **CPT Code** column, select the service code for the additional charge. **Note**: Alternatively, you can select the service description.
- 4. Optional. In the **NDC** column, select the add + button, and then search for a code to add in the **Search NDC Codes** list.
- 5. Modify the following settings as necessary.

Setting	Description
NDC Package Code	Type the code from the manufacturer.

Setting	Description	
Strength	Type the strength of the active ingredient, then select the units of strength in the list.	
Unit of Measure	Type the unit of measure.	
Lot Number	Type the lot number of the drug.	
Amount Used	Type the amount of drug administered.	
Route	Select the administration method for the drug.	
Needle Gauge	If a needle was used, select the gauge.	
Reaction	Select if any reaction occurred.	
Package Description	Type the description of the package from the manufacturer.	
Labeler Name	Type the name of company corresponding to the labeler code segment in the Product NDC.	
Expiration Date	Type the expiration date of the drug.	
Units	Type the number units (e.g. vials) used.	
Admin Site	Select the site where the drug was administered.	
Administered By	Select the person who administered the drug.	

Dictation and transcription with Exa Trans2

You can dictate findings in Exa Dictation and transcribe them in Exa Trans2 (formerly Web Trans). Exa Trans2 features a multi-panel interface with advanced functionality.

See also:

Dictation and transcription with Exa Trans and Dragon Dictation and transcription with Exa Trans and nVoq

Turn on Exa Dictation and Exa Trans2

Depending on your installation configuration, you must turn on Exa Dictation and Exa Trans2 before using them by following these steps:

- 1. On the worklist, select the settings button, and then in the button shortcut menu, select **User Settings**.
- 2. On the right side of the screen, under **Voice recognition**, select **Dictation**.
- 3. Select SAVE.

Dictate a study

Exa Trans2 transcription editor does not currently support dictation, but radiologists can use the following procedure to record dictation without simultaneous transcription (while Dragon is OFF). This feature uses a dictation toolbar **WKDE** with record, rewind, play/pause/stop, fast forward, and upload buttons.

- 1. In the worklist, double-click an unread study to open it in the viewer.
- 2. Select a template from the dropdown list, or use a voice macro to open it.

- 3. On the dictation toolbar, select the record we button, and then dictate your findings. **Note**: If needed, you can select pause during dictation.
- 4. When finished, select the stop button.
- 5. To review your dictation, rewind the recording and then select the play button. **Note**: You can record over parts of your dictation that you want to change.
- 6. When you are satisfied with the results, select the upload $\stackrel{1}{\square}$ button to add your dictation to the study.

Note: Skip this step if you selected Auto Upload Dictation on Close.

See also:

Add a transcription template Configure autosave options

Open and organize Exa Trans2

The Exa Trans2 window contains dedicated panels for managing transcription, notes, documents, and prior reports.

Prerequisite: Turn on Exa Dictation and Exa Trans2.

- 1. In the worklist, find an unread study and select its multi-panel transcription 🖽 button.
- 2. In the Exa Trans2 multi-panel, on the toolbar, select one or more of the following buttons:

			Ē	ß
1	2	3	4	5

- **1** Open or close **all** panels
- 2 Open or close the **Notes** panel
- 3 Open or close the **Documents** panel
- 4 Open or close the **Prior Reports** panel
- 3. Drag panels within the Exa Trans2 screen to reposition them.

Edit and approve transcriptions in Exa Trans2

The Exa Trans2 transcription editor does not currently support dictation playback, but you can edit and approve submitted transcriptions.

Prerequisite: Turn on Exa Dictation and Exa Trans2.

- 1. On the worklist, in the relevant study row, select the multi-panel 🛄 button.
- 2. In the **Transcription editor** panel, review the transcription, make any needed changes, and then select **Save**.
- 3. Select **Approve** or **Approve & Next**.
- 4. In the **Providers** dialog, select the approving provider and select **Approve**.

Enter notes in Exa Trans2


You can add study notes and reasons for study in the Notes panel of Exa Trans2.

- 1. On the worklist, in the relevant study row, select the multi-panel 🖽 button.
- 2. In the multi-panel, open the **Notes** panel.
- 3. In the Notes panel, select the STUDY NOTES or REASON FOR STUDY tab.
- 4. If entering a study note, select a study date.
- 5. Type notes in the space provided, and then select **SAVE**.

Manage documents in Exa Trans2

You can view all documents attached to a study in the Documents panel of Exa Trans2. The Documents panel displays up to two documents at once, and you can select which documents to display.

- 1. On the worklist, in the relevant study row, select the multi-panel \blacksquare button.
- 2. In the **Documents** panel, select the document buttons to show or hide currently open documents in viewing frames.



The buttons labels indicate the document selected for viewing, the default document type set by the user in the panel, or the last-viewed document types

3. If more than two documents are available, you can open a new one by dragging a document metadata block from the top of the panel into a document viewing frame.

		Niewind, Daniell	e M
		03/04/1992, F	S
		GN021000	A
STUDY DE	SCRIPTION: CT A	bdomen and Pelvis wit	th C
REFERRIN	G PHYSICIAN: He	arn, Evette ARNP&	
		Documents	
Show All Documents	SET AS DEFAULT		
Insurance Card D 01/21/2021	Order/Prescription (11/01/2021	Order/Prescription	Order/Prescription 11/01/2021
Order/Prescription	Drag docum	ent cards	Order/Prescription 11/03/20.1
Other [01/21/2021		onto buttons to load	
Patient Forms	Patient Forms 03/31/2021	03/31/2021	Futient Forms 07/20/2021
Patient Portal Ipload 08/18/2021	Patient Portal Upload (08/18/2021		
Prior Report 07/23/2021	Tech Worksheet (07/23/2021	Unknown 10/11/2021	
DROP DOL IMENT TO PREVIEW DROP DOCUMENT TO PREVIEW			
Drop Document to Preview 🗙			

Manage prior reports in Exa Trans2

You can view, download, and print prior reports from the Prior reports panel of Exa Trans2.

- 1. On the worklist, in the relevant study row, select the multi-panel 🖽 button.
- 2. In the **Prior reports** panel, in the left pane, select the block of metadata corresponding to the report that you want to view.
- 3. To download or print the report, in the right pane, hover over the report, and then select the download or print button in the toolbar that appears.

Dictation and Transcription with Exa Trans and Dragon

With Exa Trans, you can dictate and transcribe simultaneously with Dragon voice recognition. Alternatively, you can dictate findings in Exa Dictation and transcribe them manually. If your implementation of Exa PACS/RIS offers Dragon, the nVoq feature is not available. To use the features of the Exa Panel for transcription related tasks, see "Dictation and transcription with Exa Trans2."

Turn on Exa Trans

You must turn on Exa Trans before using it by performing the steps that follow. You turn on Exa Trans indirectly by turning on the Dragon speech-to-text option in the user settings.

Prerequisite: Install Exa Trans (see appendix).

- 1. On the worklist, select the settings button, and then in the button shortcut menu, select **User Settings**.
- 2. On the right side, under **Voice recognition**, select **Dragon**.
- 3. Select **SAVE.**

Dictate and transcribe a study

With the integrated Dragon speech-to-text application, you can use Exa Trans to dictate and transcribe findings simultaneously.

Prerequisite: Turn on Exa Trans and Dragon.

- 1. In the worklist, find an unread study and select its transcription 🔳 button.
- 2. In the **Exa Trans** window, in the **Templates** dropdown list, select a template.
- 3. Optional. To use a voice command, with the **Templates** dropdown list open, say, "Macro [*template name*].
- 4. Place the cursor where you want to add text.
- 5. On the Dragon toolbar, select the record **button**, and then begin dictating. Select stop when finished.
- 6. Select Save.

Edit and approve transcriptions

You can edit and approve saved transcriptions.

Prerequisite: Turn on Exa Trans and Dragon.

- 1. In the worklist, select the transcription 💷 button of a dictated study.
- 2. In the editing screen, review the transcription, make any needed changes, and then select **Save**.
- 3. Select e-Sign & Approve, or Approve and Next.

Add a dictation or transcription addendum

After approval, transcriptions cannot be edited. However, physicians and transcriptionists can add addendums in order to correct mistakes or insert new information.

Prerequisite: Turn on Exa Trans and Dragon.

1. In the worklist, select the transcription 📃 button of an approved study.

- To add a *dictation* addendum, repeat the steps in "Dictate a study." Exa PACS/RIS reverts the status of the dictation from Approved to Dictated.
- 3. To add a *transcription* addendum, select Add Addendum.
- 4. Type new text, and then select **Addendum Save**.
- 5. If not using Dragon, select **Addendum Submit for Review**. Exa PACS/RIS reverts the status of the dictation from Approved to Transcribed.

About using Exa Trans and Exa Trans2

Exa Trans and Exa Trans2 (with the multi-panel) are designed to work in sync. Exact behavior depends on various user rights, actions, and settings, as in the following examples.

Action/Condition	Effect
Close Exa Trans	Also closes Exa Trans2
Exa Trans2 rights assigned	Exa Trans2 available
Exa Trans rights assigned	Exa Trans available only if the Dragon user setting is also turned ON.
Auto-Open Orders + "Documents" selected	If an order auto-opens, the Documents screen auto-opens.
Auto Open Orders enabled AND Viewer Settings > General > Display Settings > Monitor 1 = Documents	Documents auto-open in the Documents screen of the multi-panel in Monitor 1.
Auto Open Orders disabled AND Viewer Settings > General > Display Settings > Monitor 1 = Documents	Documents do not auto-open, but if manually opened, they open in the multi-panel in monitor 1.
Exa Trans and Exa Trans2 enabled within Auto Open Orders	Exa Trans and Exa Trans2 both open when an order auto-opens. You can configure which monitor they open in in the Display Settings, or leave blank to open in the main monitor.
Exa Trans set to auto-open AND Exa Trans2 not enabled in Auto Open Orders	Only Exa Trans opens when a study opens (but you can still manually open Exa Trans2).
Set Exa Trans or Exa Trans2 to open on a specified monitor	Manually opening Exa Trans or Exa Trans2 opens it in the specified monitor.
Exa Trans2 set to auto open in Auto Open Orders, but not Exa Trans	Exa Trans2 auto opens when the viewer is opened, in the specified monitor, if so configured.
User selects the Exa Trans or Exa Trans2 button on the worklist	Exa Trans or Exa Trans2 opens on the same monitor as the worklist.
Exa Trans Esign & Approve	Study is approved, viewer closes, Exa Trans minimized.
Exa Trans Approve & Next	Study is approved, viewer and Exa Trans open with next available study.

Action/Condition	Effect
Exa Trans Not Approve	Study status changes to Not Approved, viewer closes, and Exa Trans minimizes.
Exa Trans Skip	Study stays in Unread status, viewer and Exa Trans open with the next available study
Exa Trans Save	Study status changes to Draft, viewer and Exa Trans remain open with current study
Exa Trans Pre Approve	Study status changes to Pre-Approved, viewer closes, and Exa Trans minimizes
Exa Trans and Exa Trans2 Esign & Approve	Exa Trans closes, Exa Trans2 minimizes or closes
Exa Trans and Exa Trans2 Approve & Next	Study status changes to Approve, viewer, Exa Trans, and Exa Trans2 open with the next available study
Exa Trans and Exa Trans2 Not Approve	Study status changes to Not Approved, viewer, Exa Trans, and Exa Trans2 minimize or close.
Exa Trans and Exa Trans2 Skip	Study status remains Unread, the viewer, Exa Trans, and Exa Trans2 open the next available patient or study.
Exa Trans and Exa Trans2 Save	Viewer, Exa Trans, and Exa Trans2 remain open. If the user closes the viewer, Exa Trans and Exa Trans2 also close.
Exa Trans and Exa Trans2 Pre Approve	Study status changes to Pre-Approved, viewer and Exa Trans2 close.

Dictation and transcription with Exa Trans and nVoq

With Exa Trans, you can dictate and transcribe simultaneously with nVoq voice recognition. One advantage of using nVoq is that it is a "zero footprint" solution for higher performance. Alternatively, you can dictate findings in Exa Dictation and transcribe them manually. If your implementation of Exa PACS/RIS offers nVoq, the Dragon feature is not available. Before using nVoq with Exa Trans, you must:

- Obtain account credentials from the nVoq website, or create an account.
- Configure the account in Exa PACS/RIS.

See also:

<u>Create an nVoq user account</u> <u>Configure an nVoq user account</u>

Turn on Exa Trans and nVoq

You must turn on Exa Trans and nVoq before using them. **Prerequisite**: Install Exa Trans (see appendix).

- 1. On the worklist, select the settings button, and then in the button shortcut menu, select **User Settings**.
- 2. On the right side, under Voice recognition, select nVoq (Exa Trans).
- 3. Select SAVE.
- 4. Sign out of Exa PACS/RIS, and then sign in again.

Create an nVoq user account

To create an nVoq user account from within Exa Trans:

Prerequisite: Turn on Exa Trans and nVoq.

- 1. In the worklist, find an unread study and select its transcription 🔳 button.
- 2. In Exa Trans, on the nVoq Options tab, select Account.
- 3. In the **Account** dialog, on the right pane, type account information, and then select **Save**.
- 4. Configure your account in Exa PACS/RIS.

See also:

Configure an nVoq user account

Configure substitutions

To use nVoq for voice recognition, you must configure your nVoq user account in Exa PACS/RIS. Obtain your user account from the nVoq website.

- 1. On the burger 🔜 menu, select **SETUP**.
- 2. Next to the burger button, select the word in all caps, and then select **User Management**.
- 3. On the **THIRD PARTY TOOLS** tab, on the left side, use the group boxes to select a user.
- 4. On the right side, in the **nVoq** box, enter the user's account information.
- 5. Turn on nVog $\blacksquare \rightarrow \blacksquare$
- 6. Click **APPLY TO SELECTED USERS**.

Dictate and transcribe a study

With the integrated nVoq application, you can use Exa Trans to dictate and transcribe findings simultaneously.

Prerequisite: Turn on Exa Trans and nVoq.

- 1. In the worklist, find an unread study and select its transcription 💷 button.
- 2. In the **Exa Trans** window, in the **Templates** dropdown list, select a template.
- 3. Press the button on the microphone, and then begin dictating. Press the button again when finished.
- 4. **Note**: You can also select the dictation \bigotimes button in the bottom-right corner of the screen to start recording, and \checkmark to stop.
- 5. Optional. To view the hypothesis during dictation, select the **Show Hypothesis** link.
- 6. Select **Save**.

Use voice commands

When using nVoq in Exa Trans, in addition to substitutions, you can use the voice commands described in the following table.

Command	Description
[voice macro command]	Runs the pre-configured voice macro to open a transcription template (see "Add a transcription template").
Select [word or phrase]	Selects words and phrases. Example : Say, "Select cardiac arrest" to select the word "cardiac" followed by the word "arrest."
Select [word] through [word]	Selects a range of words Example : Say, "Select food through department" to select the

Command	Description	
	phrase "food and beverage department."	
Next variable Next field	Selects the next set of brackets within the report and their contents.	
Previous variable Previous field	Selects the previous set of brackets within the report and their contents.	
Scratch that Delete that Undo	If text is currently selected, deletes the selection. If text is not currently selected, deletes ("undoes") the previously transcribed phrase.	

Edit and approve transcriptions

You can edit and approve saved transcriptions.

Prerequisite: Turn on Exa Trans and nVoq.

- 1. In the worklist, select the transcription 💷 button of a dictated study.
- 2. In the editing screen, review the transcription, make any needed changes, and then select **Save**.
- 3. Select e-Sign & Approve, or Approve and Next.

Add a dictation or transcription addendum

After approval, transcriptions cannot be edited. However, physicians and transcriptionists can add addendums in order to correct mistakes or insert new information.

Prerequisite: Turn on Exa Trans and nVoq.

- 1. In the worklist, select the transcription 🔳 button of an approved study.
- 2. To add a *dictation* addendum, repeat the steps in "Dictate and transcribe a study." Exa PACS/RIS reverts the status of the dictation from Approved to Dictated.
- 3. To add a *transcription* addendum, select Add Addendum.
- 4. Type new text, and then select **Addendum Save**.
- 5. Select Addendum Submit for Review.

Exa PACS/RIS reverts the status of the dictation from Approved to Transcribed.

QC operations

All DICOM studies from other AEs initially appear on the QC tab, and are automatically evaluated for conflicts with PACS studies, RIS orders, and other data based on user-defined receiver rules (see "About receiver rules"). The topics in this section describe how to resolve conflicts.

Sort studies by QC status

To find conflicts needing reconciliation more easily, you can sort studies in the QC tab of the worklist by their QC status.

Prerequisite: Show the QC tab. To view only conflicts in the QC tab, select **Settings** > **User Settings**, and then clear the **Show Completed in Pending List** checkbox.

- 1. In the worklist, select the **QC** tab.
- 2. On the search bar, select inside the **STATUS** box.
- 3. On the shortcut menu, select a status (such as "Conflicts") and select **APPLY FILTER**.

See also:

Configure other user settings

Reconcile conflicts by matching to a RIS order

To reconcile conflicts, start by trying to match the conflicting study to a RIS order.

Prerequisite: Show the QC tab (see "Configure other user settings").

- 1. In the worklist, select the **QC** tab.
- 2. Find a study whose status is **Conflicts**, and in its shortcut menu, select **Reconcile**.
- In the Reconcile dialog, under Suggestions or RIS Orders, find an order in the list that matches the details listed under Current Study, and then select its SELECT button.
 Note: If a matching order does not appear in the list, you can try using the search bar.
- 4. In the confirmation dialog, select **OK**.
- 5. Confirm that the study no longer has a status of **Conflicts**.

Reconcile conflicts by manually editing demographics

If you can find a RIS order that should match the conflicting study but does not, it may be due to errors in the patient name, account number, or other information in the conflicting study. If you know this to be the case, you can edit the demographics of the conflicting study to match the RIS order.

Prerequisite: Show the QC tab (see "Configure other user settings").

- 1. In the worklist, select the **QC** tab.
- 2. Find a study whose status is Conflicts, and select its edit 🖉 button.
- 3. In the Manual Edit dialog, edit demographics as necessary and then select SAVE.
- 4. Confirm that the study no longer has a status of Conflicts.

Reconcile conflicts by creating an order

If you cannot find a RIS order that matches or should match a conflicting study, you can reconcile by creating a new order that matches.

Prerequisite: Show the QC tab (see "Configure other user settings").

- 1. In the worklist, select the **QC** tab, and then find a study whose status is **Conflicts**.
- 2. Create an order for the conflicting study by following the steps in "A typical scheduling workflow."
- 3. On the QC tab, in the conflicting study's shortcut menu, select Reconciliation.
- 4. In the **Reconciliation** dialog, under **RIS Orders**, find the order you just created and select its **SELECT** button.
- 5. Confirm that the study no longer has a status of Conflicts.

Move QC studies to the All Studies tab

You can move a study in the QC tab to the All Studies tab without reconciling.

Prerequisite: Show the QC tab (see "Configure other user settings").

- 1. In the worklist, select the **QC** tab, and then find a study that you want to move.
- 2. In the study's shortcut menu, select **Move to All Studies**.

Work with the Exa PACS/RIS viewer

Standard viewing tasks

Open a study in a viewer

In this manual, *viewer* refers to the Exa PACS/RIS viewer unless otherwise specified. To open a study, on the worklist, do one of the following:

- To open in the Exa PACS/RIS viewer, s<u>ele</u>ct the study.
- To open in the Opal viewer, select the ² button of a study.
- Configure Exa PACS/RIS to open studies in the viewer when you double-click them. Follow the steps in "Miscellaneous user settings" to configure the double-click behavior setting.



CAUTION: Check for the presence of the lossless indicator in the lower-left corner of the image frame before proceeding with a diagnosis. If you adjust the image, wait until the lossless indicator turns green before diagnosis.



The red lossless indicator means the image has not yet fully loaded.

View tomographic studies with CAD findings

The Exa PACS/RIS Viewer supports 2D CAD findings for mammography and 3D tomographic series. Findings are displayed as overlays. You can open and manipulate studies that include 3D CAD data in the usual manner, and use the following.

• Select a finding to select a value for the 2D or synthesized view.

Result: The screen changes to a 1 x 2 temporary view with the 2D image in one cell and the BTO series scrolled to the slice with the finding in the other. For example, if you select the RCC finding, the BTO series opens at the RCC slice.

• To jump through images in BTO/tomosynthesis series that include 3D CAD findings, configure a keyboard shortcut:

Worklist > Viewer Settings > Tools > Keyboard shortcuts > CAD – BTO Jump to Next Finding

- See "Enable CAD Findings on All BTO Images"
- See "View CAD Findings"

View priors with the Prior bar

If priors are included in a study that you open, you can view them by using the Prior bar. To show the Prior bar in the viewer, configure the **Use Modified Toolbar** setting (see "Configure other interface settings").



The Prior bar contains the current and prior studies on the top row, and their image thumbnails on the bottom row (see figure). The study boxes show the age of the study, and depending on configuration, let you do one or more of the following:

- Hover over a study to display its details.
- Select a study to open the thumbnail bar.
- Double-click a thumbnail to open its image or series (for example, the right box in the top row of the figure).
- If a report is included, select its symbol to view.

Send an image from the viewer

You can send the current image in the viewer to an application entity. If the image includes annotations, those annotations are included with the image according to the method you specify in the **Send Annotations as** setting (see "Configure application entities").

- 1. Open an image in the viewer.
- 2. Right-click the image and select **Send Image/Annotation**.
- 3. In the Send Study dialog, in the bottom pane, select one or more AEs
- 4. Select SEND TO SELECTED or SEND TO ALL.

DICOM-print a study

You can print the currently viewed image to a preconfigured DICOM printer. The current image prints, including any displayed annotations and overlays.

Note: You cannot print multi-frame MR/CT or MG tomography images, or US echocardio series. **Prerequisite**: Enable the DICOM Print shortcut menu command (see "Add or remove tools from the image shortcut menu").

- 1. Open a study in the Exa PACS/RIS viewer, right-click any image, and then select **DICOM Print**.
- 2. In the **DICOM Print** dialog, in the **Printer** dropdown list, select a printer.
- 3. Enter the following remaining settings.

Setting	Description
Annotations	Select to include annotations, or clear to exclude.
W/L (Default)	Select to print the image with its original window/level settings. Clear to select the current window/level setting.
Overlay Text	Select to include the DICOM overlay (as per-image detail), or clear to exclude.
Selected Image Selected Series Current Page All Images	Select to print the selected image, selected series, current page of images, or all images.

Setting	Description	
Prev / Next	Select to move through pages of the print preview.	
Printer	Select a printer (selected earlier in this procedure).	
Configuration	Select a printer profile.	

4. Select **DICOM Print**.

Configure the viewer

In the Viewer Settings dialog, you can configure a wide variety of viewer options including display, interface, modality, toolbars, and shortcut menus. For details on operations in the Viewer Settings dialog, see other topics in this section. There are two ways to open the Viewer Settings dialog.

- In the worklist, on the upper toolbar, select the settings button, and then in the button shortcut menu, select **Viewer Settings**.
- In the Exa PACS/RIS viewer, in the upper toolbar, select the setting 🖾 button.

Viewer Settings						
GENERAL	Display Settin	gs				
INTERFACE	Monitors on System	3		C 💿		
MODALITY	Monitor	Current	Prior	Full Screen	Orders	Туре
MODALIT	DISPLAY1	0	0		None 🔻	
MAMMOGRAPHY	DISPLAY2	۲	0		None 🔻	
OVERLAYS	DISPLAY3	0	۲		None •	•
TOOLS						
	Autosave Opt	ions				
EXTERNAL TOOLS	Autosave Image	Properties on	Close			
10013	Autosave Image Annotations on Close					
	Auto Mark Read Study on Close					
	Auto Upload Dictation on Close					
	Autosave Viewer Settings on Close					
	Auto Open Next Study					
	Auto Send Annot	tated Images o	n Close			

Set up connected displays

Configure all connected monitors that you intend to use with Exa PACS/RIS. These settings act as default behavior for what study items open in which monitor. If DMs conflict with the settings you enter here, the DM takes precedence.

Prerequisite: Install the Multi-Screen Presentation extension in Google Chrome.

- 1. In the Exa PACS/RIS viewer, in the upper toolbar, select the setting is button.
- 2. In the **Viewer Settings** dialog, in the left pane, select **GENERAL**.
- 3. Under **Display Settings**, in the **Monitors on System** box, select the update \bigcirc button to update the monitor count (or enter manually), and then select the identify O button.
- 4. In the table of monitors, enter the settings in the following table.

Note: At any time you can select the update \bigcirc button to preview your changes.

Setting	Description	
Monitor	Select to make monitors available for <i>image</i> viewing. To display orders and studies on the monitor, clear this option.	
Current	Select to make monitors available to display current studies.	
Prior	Select to make monitors available to display prior studies, if available.	
Full Screen	Select to default to full screen view.	
Orders	Select a section of the patient chart to open in the corresponding monitor when manually opening that section with a viewer tool, or when configured to open automatically. For example: If you select Document in the Orders dropdown list for DISPLAY2 , the Document section of the patient chart will appear in DISPLAY2 when you select the button in the viewer.	
Туре	The color or grayscale display type.	
Calibration Width/mm	Type a manual calibration width (appears on horizontal calipers)	
Calibration Height/mm	Type a manual calibration height (appears on vertical calipers)	

5. Select SAVE.

Configure autosave options

You can configure how the viewer performs automatic saving and other functions.

- 1. In the Exa PACS/RIS viewer, in the upper toolbar, select the setting in button.
- 2. In the **Viewer Settings** dialog, in the left pane, select **GENERAL**.
- 3. Under Autosave Options, enter the settings in the following table.

Setting	Description
Autosave Image Properties on Close	Automatically saves image properties such as the W/L when the image is closed. Saved properties are restored the next time the image is opened.
Autosave Image Annotations on Close	Automatically saves image annotations when the image is closed. Saved annotations are restored the next time the image is opened.
Auto Mark Read Study on Close	Automatically marks the study as "Read" when the study is closed.
Auto Upload Dictation on Close	Automatically uploads recorded dictations to add to

Setting	Description
	the study when the study is closed.
Autosave Viewer Settings on Close	Automatically saves any changed viewer settings such as toolbar configuration when closing the viewer.
Auto Open Next Study	Automatically opens the next study in the worklist when the current study is closed.
Auto Send Annotated Images on Close	Automatically sends images if they include annotations when the current study is closed.

Configure the toolbar

You can configure the appearance and other properties of the viewer toolbar. For additional toolbar settings, see "Configure other interface settings."

- 1. In the Exa PACS/RIS viewer, in the upper toolbar, select the setting 🔯 button.
- 2. In the Viewer Settings dialog, in the left pane, select INTERFACE.
- 3. Under **Toolbar**, enter the settings in the following table.

Note: You may need to update the viewer for changes to take effect	t.
--	----

Setting	Description	
Toolbar Button Scale	Adjusts the size of toolbar buttons.	
Thumbnail Bar Scale	Adjusts the size of the thumbnail bar.	
Magnifying Glass Size	Adjusts the size of the area affected by the magnifying glass.	
W/L Acceleration	Sets the rate or sensitivity of W/L adjustments. Typical range is 100–600.	
Span Sensitivity	Sets the rate or sensitivity of span adjustments. Slow/Fast - Spans slowly or quickly. Auto - Adjusts the speed automatically based on the number of images in the series.	
Thumbnail Column/Rows	Sets the number of columns and rows for the thumbnail bar.	
Thumbnail Bar Orientation	Sets the position and resultant orientation of the thumbnail If you select Mirror , the thumbnail bar in the left monitor appears on the left side of the screen, and the thumbnail ba the right monitor appears on the right side of the screen (available when the modified toolbar is not enabled).	
Header Menu	Sets the position of the toolbar and other header items.	
DM Toolbar	Sets the position of the DM toolbar.	

4. Select SAVE.

Configure calipers

You can configure the number and placement of calipers.

- 1. In the Exa PACS/RIS viewer, in the upper toolbar, select the setting 🔯 button.
- 2. In the **Viewer Settings** dialog, in the left pane, select **INTERFACE**.
- 3. Under **Caliper Position**, select checkboxes for each caliper that you want to display, and then select **SAVE**.

Configure other interface settings

You can configure miscellaneous viewer toolbar and other settings.

- 1. In the Exa PACS/RIS viewer, in the upper toolbar, select the setting in button.
- 2. In the Viewer Settings dialog, in the left pane, select INTERFACE.
- 3. Under **Other Toolbar**, enter the settings in the following table.

Setting	Description
Ask on Close	Prompts you to specify which items to save before closing the viewer.
Single Instance Mode	Limits the viewer to one display frame per browser.
Skip Frames in Cine to Maintain Playback Speed	Skips large images in a cine loop so that the cine plays a fixed speed.
Show Cutlines for First/Last Images	Shows any available cutlines only on the first and last images of a series.
Open Key Images as Single Images	Displays any available key images separately in the thumbnail area. When cleared, shows all series images in the key image thumbnail area.
Use Modified Toolbar	Temporarily hides the thumbnail bar, and adds a Prior bar at the top of the screen that displays patient priors in order. You can hover over a prior to display series/image thumbnails, and select the thumbnails to open the images. Works in conjunction with the Auto Show Priors Bar option.
Caliper Zoom	If selected, you can drag the calipers to zoom the current image.
Auto-Play Cine Loops	Automatically plays cine loops when opened.
Auto Play Cine Wait Time (ms)	Sets a pause time before auto-playing cine loops.
Default Frame Rate for MP4	Sets a default frame rate for MP4 files.
Default Cutline Thickness	Sets a default thickness for cutlines.
Auto Open Orders	Selects the options that appear in the Orders dropdown list in the Viewer Settings dialog, General Info. screen, under Display Settings.
Auto Show Priors Bar	Shows all prior studies in a separate bar at the top of the viewer.

Setting	Description
Focus-In on Zoom Point	When selected, the user can drag on an image to zoom in and out at the initial pointer position.
Fill Empty DM Cells	Fills undefined DM frames with images in the current study.
High-Quality Interpolation	Select to use high-quality image interpolation. Frequently used to enhance X-ray quality. You can use this compression option to remove unwanted "gridlines" if switching between earlier and high- resolution monitors.
Enable RGB/YBR Swap	Makes the color settings supported by the user video settings available.
Enable Developer Mode	Shows development mode logs, and displays a vertical green line in the right side of each frame when the server performs a prefetch.
Show Calibrated Ultrasound Region	Server side setting.
Hide Partial Close Button	Hides the partial close button, an "X" that appears next to the logoff button. Partial closing closes the study, but leaves the viewer open for faster loading of future studies.
Hide All Monitor Layout Change Button	Hides the toolbar's monitor layout change button that appears when two or more monitors are made available.
Show Label in DM Preview	Shows the previews of hanging protocols in the DM bar.
Show Middle Slice Thumbnail	Shows only the thumbnail of the middle slice in a series on the thumbnail list.
Enable Cardio Viewer	[Unused]
Disable Queuing	Forces synchronous communication; client message and server response occur one at a time. CAUTION: We do not recommend changing this setting. Consult with your Konica-Minolta representative.
Stretch Prior Bar	Extends the prior bar across multiple monitors. If the prior bar exceeds the total available screen width, a scroll bar appears.
Show Prior Index	Displays the Prior index number in the thumbnail and Prior bars.
Auto open STAT	When you open a study in the Exa PACS/RIS viewer, this option automatically opens any STAT images, if included.
Split W/L Region	[Unused]

Setting	Description
Color Only as Last Monitor	Chooses the color monitor as the last monitor on which to display images.
Client-Side Window/Level for US	Processes the Window/Level for ultrasounds on the client side. May reduce lag by bypassing the server.

See also:

Configure the toolbar

Configure annotation tool functionality

You can configure annotation tool functionality.

- 1. In the Exa PACS/RIS viewer, in the upper toolbar, select the setting 🔯 button.
- 2. In the Viewer Settings dialog, in the left pane, select INTERFACE.
- 3. Under **Annotation**, enter the settings in the following table.

Setting	Description
Show Annotation	Shows annotations by default. The user can still hide them manually in the viewer.
One-Click Annotations	Changes from the selected annotation tool to the default cursor after each use. If cleared, the user can reuse the tool repeatedly without re-selecting the tool.
Show One-Click Annotations Button	Shows a button for turning one-select annotation on and off.
Annotation Edit Mode	Selects the Edit command in the image shortcut menu by default.
Use Dot Cursor	Changes the standard pointer to a dot pointer.
Edit Annotations after Creating	Causes the viewer to enter Edit mode after initial placement of an annotation.
Allow Drag Create	Creates annotations by dragging instead of selecting.
ROI Show Size	Displays the size of the selected ROI.
Confirm Annotation Delete	Prompts the user for confirmation when deleting annotations.
Persistent Annotation Tool	Makes a selected annotation tool available until the user selects a different tool. If cleared, the pointer changes to the default operation after using the tool.
Show Measurements In	Sets the units for any length measurements taken.

4. Select SAVE.

Configure annotation colors

You can configure the color of annotations to indicate whether they are selected, in edit mode, or applied.

- 1. In the Exa PACS/RIS viewer, in the upper toolbar, select the setting we button.
- 2. In the **Viewer Settings** dialog, in the left pane, select **INTERFACE**.
- 3. Under **Colors**, to add an annotation color, select inside a color or grayscale box and then use the color picker to select a color.

Anno Color 1-5: Display annotations in these colors by default.Anno Color Edit: Change annotations to this color while being edited.Anno Color Hover: Change annotations to this color while hovering over them.

4. Select SAVE.

Configure annotation size and scaling

You can configure the pixel or font size of annotations, and scale annotation points.

- 1. In the Exa PACS/RIS viewer, in the upper toolbar, select the setting 🔤 button.
- 2. In the Viewer Settings dialog, in the left pane, select INTERFACE.
- 3. Under **Miscellaneous**, enter the settings in the following table.

Setting	Description	
Scale in Pixel Size	Determines the annotation font size by the pixel size.	
Scale Annotation Font By	Sets the font size for annotations.	
Scale Annotation Point By	Sets the line thickness for annotations.	

4. Select SAVE.

Configure recording

You can configure audio recording options for Exa Dictation.

- 1. In the Exa PACS/RIS viewer, in the upper toolbar, select the setting with button.
- 2. In the **Viewer Settings** dialog, in the left pane, select **INTERFACE SETTINGS**.
- 3. Under **Record Control**, enter the settings in the following table.

Setting	Description
Hold for Record	Requires you to hold down the button for the duration of recording.
Beep on Record	Beeps when recording starts.
Blink on Record Pause	Causes the microphone light to blink when recording is paused.
Monkey Chatter on Rewind	Plays "monkey chatter" sound when rewinding.
FFWD/RWD Factor (200–500)	Changes the rate of fast forward and rewind.
Lag (0-5000)	Delays the response after selecting play or record by the specified amount of time.

4. Select SAVE.

Show or hide tool buttons

You can hide certain tool buttons.

- 1. In the Exa PACS/RIS viewer, in the upper toolbar, select the setting 🔤 button.
- 2. In the **Viewer Settings** dialog, in the left pane, select **INTERFACE**.
- 3. Under **Tool Buttons**, select the checkboxes of the items that you want to hide.
- 4. Select **SAVE.**

Configure fusion, ROI, and SUV options

You can configure options for fusion, ROI, and SUV.

- 1. In the Exa PACS/RIS viewer, in the upper toolbar, select the setting 🙆 button.
- 2. In the Viewer Settings dialog, in the left pane, select INTERFACE.
- 3. Under **Fusion**, and under **ROI & SUV**, enter the settings in the following table.

Group	Setting	Description
Fusion	Auto Adjust for CT/PT Frame Count Mismatch	Select to reconstruct PET anatomy on fusion overlays between absent slices. Disable to display PET overlays only for slices originally included in the PT series.
ROI & SUV	ROI Show Size	Adds length and area measurements to ROI.
	Show Number of Pixels in ROI Selection	Select to show the number of pixels selected when annotating an ROI or selecting with the freehand tool.
	Show Number of Slices in ROI Selection	Select to show the number of slices selected when annotating an ROI or selecting with the freehand tool.
	ROI Selection Weighting	Select which pixels are included in an ROI. Weighted: Include pixels touching or within the ROI border, and assign a value based on the percentage of the pixel lying within the ROI. Inclusive: Include pixels touching or within the ROI border, and use the full pixel value. Exclusive: Include only pixels completely within the ROI border, and use the full pixel value.
	Enable SUV Calculations	Select to add SUV calculations to ROI annotations of PET SUV series and CT-PET fusion studies. Prerequisite : Your system administrator must also enable SUV in a separate procedure.
	Show SUV Type and Measurements in the ROI Header	Select to include the SUV type and measurements in the ROI header.
	Show SUV Units after Measurements	Select to include the SUV units following the measured values in the ROI header.

Group	Setting	Description
	Use Standard SUV Type Units (g/ml, cm ² /ml)	Select to display SUV values using standard units for the SUV type. Clear to use the values stored in the DICOM file.
	Default SUV Type	Select the type of SUV calculation to perform.

See also:

About ROI and SUV values and units

Configure modality-specific viewing options

You can configure how studies appear in the viewer for all modalities, or for each specific modality.

- 1. In the Exa PACS/RIS viewer, in the upper toolbar, select the setting 🔯 button.
- 2. In the **Viewer Settings** dialog, in the left pane, select **MODALITY**.
- 3. In the list of modalities, select a modality to configure.
- 4. Enter the settings in the following table.

Section	Setting	Description
Layout	Screen Layout	Changes the layout of frames.
	Series Layout	Changes the layout of series frames within screen layout frames.
Mouse Buttons	Left/Right/Middle/Left+Right	Assigns functions to mouse buttons. This is frequently used by CAD users to assign functions to extra mouse buttons.
Compression		Sets the image quality, which inversely affects viewer performance.
Presets	Кеу	Assigns shortcut keys to W/L presets.
	Description	Type a name for the W/L preset.
	Window Width	Sets the window width of the W/L preset.
	Window Center	Sets the window center of the W/L preset.
	Set	Select when finished entering Preset settings.
Options	Auto Linking	Turns on the Auto Linking function.
	Assume Color Study	Forces studies of the selected modality to appear in the default color monitor set in the display settings regardless of color.
	Assure All Viewed	Displays a check mark in thumbnails of images that were opened.
	Auto CLAHE	Turns on the CLAHE function.

Section	Setting	Description
	Auto Hang DM	Enables the use of DMs. Makes the first instance on the DM preview available to hang on the viewer.
	Auto DM Wrap	Enables moving from the final step of a DM directly to the first step, and back again.
	Auto Hang Priors	Automatically loads the first prior when the viewer opens. Works in conjunction with Auto Open Priors.
	Auto Replace Priors	Automatically replaces prior images in the current layout.
	Auto-Invert SC Images	Inverts white and black of scanned documents such as reports. Reduces eye fatigue.
	Auto Next Series	When moving beyond the last image of the current series, automatically opens the next series.
	Auto Next Series Cine	Automatically starts cine play of the next series when the user opens it.
	Auto Next Series Wrap	Automatically opens the first series after viewing the last image of the last series in a study.
	Auto Next Study	Automatically opens the next study in the worklist after closing the current study.
	Auto Swap Red/Blue	Inverts colors that may not be displayed from the modality properly (such as with non-DICOM ultrasounds).
	Auto Show DICOM Overlays	Automatically displays DICOM overlays, if present.
	Auto Show SR Overlays	Automatically displays SR overlays, if present.
	Auto Show Cutlines	Automatically displays cutlines, if present. Note, this setting also applies to synthesized mammogram views, in which the cutlines indicate the position of the currently viewed image on the corresponding BTO view.
	Auto Show Cine	Shows the media control bar when a series is opened.
	Auto Show W/L Bar	Shows the window/level bar when the viewer opens.

Section	Setting	Description
	Detect Pixel Padding	Turns detection of pixel padding ON/OFF.
	DM Allow Missing Cell	Shows a blank cell in the DM if the assigned image is not available.
	DM Save W/L	Saves the window/level with the DM.
	Save Study DM on Close	Creates a new DM for each study when it closed, or when the next study auto- opens. The DM is named with the accession number, and contains the last displayed stack and monitor position.
	Show PDF in Last Stack	Moves PDF files to the last place in the stack: in the viewer, they are loaded last, if an empty cell is available.
	Instance Window/Level	Shows each image with its own W/L, rather than using the W/L of the first instance.
	Do Not Skip Images	Prevents scrolling forward if subsequent images are not yet loaded.
	Ignore Frame of Reference within Study	Disables referencing of the study's DICOM frame of reference UID when performing linking and cutline functionality.
	Ignore LUT	If LUT values are corrupted, Exa PACS/RIS ignores the LUT values, and attempts to render the best image possible.
	Ignore Presentation LUT	Same as Ignore LUT, but select for certain vendors that use a "Presentation LUT."
	Keep Rotate	Applies the current rotation to all images in the series.
	Keep W/L	Applies the current W/L to all images in the series.
	Keep Zoom	Applies the current zoom level to all images in the series.
	Extend Image Display (if Stretch)	When Stretch Across Monitors is selected, extends a single image across multiple monitors.
	Pixel Padding as Background	Interpolates missing pixel data to fill in "dead" spots in an image. Note : When using this feature, reading physicians should be aware that some pixels may be synthesized.

Section	Setting	Description
	Pre-generate Bitmaps	Pre-generates bitmaps automatically if imported into PACS.
	Reset W/L for Individual Images	Resets the W/L for each image. Frequently used to optimize MRI images. Clear to use the first W/L sent by the modality for all images.
	Select Last Contrast Entry	When DICOM tags include multiple W/L values, uses the last value for all images in the series. Clear to use the first value.
	Show 3D Spine Labels	Shows the 3D spine label tool on the toolbar.
	Show 'Bone Enhance' on Toolbar	Shows the Bone Enhance tool on the toolbar.
	Show DM Toolbar	Shows/hides the DM toolbar on initial load.
	Show Spine Labels	Shows the spine labels tool on the toolbar.
	Sort Thumbnails by Date/Time	Sorts thumbnails by date/time.
	Stop Thumbnail from Updating	Prevents W/L changes to the current image from affecting its thumbnail.
	Stretch Across Monitors	Turns on extending of items across multiple monitors.
	Cine Direction	Sets the cine playback to forward or backward.
	Default FPS	Causes cine play to occur at the default frames per second, depending on modality.
	Enable 4DM	Opens the 4DM viewer for post- processing. (Requires configuration to integrate with the 4DM viewer.)
	Disable CINE Scrolling	Disables cine play of series.
	Active Frame Based Cineplay	Playing a cine loop on one series automatically plays all linked series.
	Disable Caliper	Hides calipers for the modality.
Auto-Split Rules	Always	Splits US series into individual images.
	Differing Echo Time	Splits by echo time.
	Differing Series Number	Splits by series number.
	Differing Series Time	Splits by series time.

Section	Setting	Description	
	Differing Acquisition Number	Splits by acquisition number to create stacks for separate acquisitions/scans.	
	Differing Diffusion Value	Splits images within similar series UID by b-value (0018,9087 MR Diffusion Value) into separate series.	
	Differing Trigger Time	Splits by trigger time (0018,1060).	
	Isolate MPEG	Splits by MPEG file.	
	Isolate Multiframe	Splits cine loops into multiple images.	
Premium View	Bone Enhance	Displays the contrast enhance menu.	
Auto Bone Enhance	e	Highlights the bone portions of images.	
Auto WL Type		Selects the default W/L to use for the selected modality.	
Auto Reorder Imag	jes	Automatically changes the order of images in a series to the selected order.	
Prior Options	Auto Open Prior	Automatically opens prior studies.	
	Relevant Priors	When automatically opening priors, also opens relevant priors from other modalities. See "Advanced options for displaying relevant priors."	
	Auto Open Prior Count	When automatically opening priors, opens the selected number of studies.	
	Force Relevant Only	Opens only relevant priors based on modality, body part, and description.	
	Prioritize Current Modality First	When opening relevant priors, display same-modality priors first.	

6. Optional. If you selected Relevant Priors, see the next section, "Advanced options for displaying relevant priors."

Advanced options for displaying relevant priors

When you select the Relevant Priors checkbox in the Modality area of the Viewer Settings dialog, a table appears for entering criteria that determine which relevant priors to open. To use this table, refer to the following examples.

- To open only priors of a specific modality, body part, or description, type the criteria in the corresponding columns of the table. For example, to only open images of the head, in the **Body Part** cell, type HEAD.
- To open priors for more than one item, you can type each item on its own row of the table. Also, you can specify multiple items on one line by delimiting with a bar. For example to open mammograms and ultrasounds, in the **Modality** cell, type MG|US.
- Use wildcards and regular expressions. For example, to specify CTs of the right and left knee having specific laterality, you can type the following.

Modality	Body Part	Description	Main Study Body Part	Main Study Description	
					SET

Note: The regular expression KNEE *(LEFT|LT|BI) means: The word KNEE, followed by either LEFT, LT, or BI.

Configure mammography

You can configure mammography viewing options.

- 1. In the Exa PACS/RIS viewer, in the upper toolbar, select the setting 🔯 button.
- 2. In the Viewer Settings dialog, in the left pane, select MAMMOGRAPHY.
- 3. Enter the settings in the following table.

Section	Setting	Description
Mammography	Use 2+ Year-Old Priors	Makes available the display of priors that are 2 years old or more.
	Stack Same View	When Auto Next Series is turned on, stacking of 100% matches for a cell becomes available in the Display Manager.
	Auto Orient Mammo Views	Automatically orients mammo views.
	Swap Left/Right Breast Positions (with AutoOrient Only)	When Auto Orient Mammo Views is selected, switches the left and right breast images.
	Remove BTO Projections	Hides the BTO orientation overlay.
	Allow Mammo Switching via Overlay	When selected, the user can switch the side of the overlay if it obscures the image.
	Show BTO Orientation Overlay	Shows a bar in lower left indicating the cranial or caudal location in the breast when moving through a 3D image.
	Show Quick History	Show the Quick History of studies.
	List US Breast Priors after MG Priors	Orders priors in the prior bar.
	Enable DM Scroll	Turns on moving through DMs in the DM toolbar by using the mouse wheel.
	Enable Stack Scrolling	In special cases like BTO there will be multiple images present in the same series, which is received as a single DICOM. In these cases, turn on the stack scroll.
	Disable BTO Scrolling	Turns off scrolling in BTO views.

Section	Setting	Description
	Group DM Preview by Prior	Saves space on the prior bar by stacking DMs with the same prior logic. You can hover over a prior to display matching priors in a vertical pop-out.
	Show Priors in Chronological Order	Orders priors in the prior bar.
	Auto Slab Tomo	Automatically applies a slab thickness to tomosynthesis studies.
	Stack By View And Prior Sort By	Enables moving through prior mammo images within a hanging protocol without needing a specific DM. Select Asc or Desc to move by age of prior.
	Enable SkinLine	Maximizes breast anatomy based on the skin line without degrading image quality.
SR CAD Options	[Select]	Sets what CAD overlays (data) are displayed in the viewer, if present.
	Apply Changes to All Images	Shows all available SR CADS in the images.
	Enable CAD Findings on ALL BTO Images	Displays all findings within the series on all images. CAD findings on non-referenced images are 67% transparent.

Configure overlays

You can configure the appearance and contents of overlays.

- 1. In the Exa PACS/RIS viewer, in the upper toolbar, select the setting 🔯 button.
- 2. In the Viewer Settings dialog, in the left pane, select OVERLAYS.
- 3. Enter the settings in the following table.

Section	Setting	Description
	Font Family	Select the font used for overlays.
	Size	Select the font size used for overlays.
	Modality	Select to which modality the overlay settings apply. You can enter modality-specific settings or select all modalities.
Left/Right Overlay	Field	To display a DICOM field in the overlay, select in the box and then select a field from the list.
	Prefix	Type a prefix to the field name.
	Mask	Type text to appear in the mask.
	Add	Fill in the Left/Right Overlay fields and then select Add to add the overlay to the list.

Section	Setting	Description
Bottom Overlay	FOV/MAG/W/L	Displays the field of view, magnification, and W/L for each series in the bottom corner.

Add or remove toolbar tools

You can add or remove tools from various viewer toolbars in the program, and customize your choices by modality. For information about tools, see "Viewer toolbar tools" in the appendix.

Note: Not all toolbar tools can be removed.

- 1. In the Exa PACS/RIS viewer, in the upper toolbar, select the setting we button.
- 2. In the Viewer Settings dialog, in the left pane, select TOOLS.
- 3. Under **Toolbar**, select the modality whose toolbar you want to customize.
- In the list, select one of the following toolbars to customize.
 MAIN The toolbar at the top of the viewer.
 TOP/BOTTOM/LEFT The toolbar accessible by pointing to the top, bottom, or left edge of an image.
- 5. Under **Tools**, select or clear the checkboxes of the tools that you want to add or remove.
- 6. Select **SAVE.**

Add or remove tools from the image shortcut menu

You can add or remove tools from the shortcut menu that appears when you right-click an image, and customize your choices by modality.

- 1. In the Exa PACS/RIS viewer, in the upper toolbar, select the setting 🔤 button.
- 2. In the Viewer Settings dialog, in the left pane, select TOOLS.
- 3. Under **Toolbar**, select the modality whose shortcut menu you want to customize.
- 4. In the list, select **CONTEXT MENU**.
- 5. Under **Tools**, select or clear the checkboxes for tools that you want to add or remove.
- 6. Select SAVE.

Assign toolbar keyboard shortcuts

You can assign keyboard shortcuts ("hot keys") to tools, and customize shortcuts by modality.

- 1. In the Exa PACS/RIS viewer, in the upper toolbar, select the setting in button.
- 2. In the **Viewer Settings** dialog, in the left pane, select **TOOLS**.
- 3. Under **Toolbar**, select the modality for which you want to assign shortcuts.
- 4. In the list, select **KEYBOARD SHORTCUTS**.
- 5. Under **Tools**, select the checkboxes of the tools to which you want to assign shortcuts.
- 6. In the **Shortcut** box, type the keyboard shortcut. The shortcut can be one of the following, either by itself or preceded by the **Ctrl** key:
- Alphanumeric character (A–Z, a–z, 0–9)
- Arrow key (Up, Down, Left, or Right)
- Basic math operator (+, -, *, /)
- 7. Select **SAVE.**

Configure opening of a third-party program

You can configure Exa PACS/RIS to open third-party programs such as Ikonopedia, PowerScribe 360, and MModal.

Prerequisite: Perform the steps in "Install Exa Launch" and "Add a trusted IP or URL" in the appendix.

1. In the Exa PACS/RIS viewer, in the upper toolbar, select the setting 🕮 button.

- 2. In the Viewer Settings dialog, in the left pane, select GENERAL.
- 3. Under **Display Settings**, in the table of monitors, on the row corresponding to the monitor on which to open the third-party application, select the row's **DISPLAY** checkbox.
- 4. In the row's **Orders** dropdown list, select the application (such as PS360 or MModal).
- 5. In the left pane, select **INTERFACE**.
- 6. Under **Other Toolbar**, in the **Auto Open Orders** group, select the application (such as **PS360** or **MModal**).
- 7. In the left pane, select **TOOLS**.
- 8. Under **Toolbar**, select **MAIN**, and then in the right pane, select the **External Tools** checkbox.
- 9. In the left pane, select **EXTERNAL TOOLS**.
- 10. Enter the settings in the following table, and then select **ADD**.

Setting	Description	
Title	Type a title for the program.	
Description	Type a description of the program.	
Command	Type the command to run when you select the toolbar button (such as the path to the executable, or a URL).	
Arguments	Type arguments to pass to the command at runtime. Exa PACS/RIS supports the following arguments: {{account_no}} (patient ID) {{id}} (study ID) {{accession_no}} {{facility_id}} {{username}} {{user_id}} {{patientName}} {{patientDOB}} {{studyDescription}}	
Initial Directory	Type the path to the root folder.	
Keyboard Shortcut	Optional: Type a keyboard key sequence to use as a shortcut for opening the program.	
Toolbar Button	Optional: Select to add a dedicated button for the application on the viewer toolbar.	
Do not Base-64 Encode URL Arguments		
Use Facility ID for Subdirectory	Do no select (reserved for PenRad).	

See also:

Install Exa Launch Add a trusted IP or URL Configure opening of PenRad Configure opening of OrthoView

Configure opening of PenRad

You can configure Exa PACS/RIS to be able to open mammography and ultrasound breast studies in PenRad by selecting a PenRad button on the viewer toolbar. Each instance of PenRad automatically opens in the configuration corresponding to the facility ID of the study. You must perform this configuration procedure for each user.

Prerequisite: Install Exa Launch.

- 1. In the Exa PACS/RIS viewer, in the upper toolbar, select the setting 🔤 button.
- 2. In the Viewer Settings dialog, in the left pane, select GENERAL.
- 3. Under **Display Settings**, in the table of monitors, on the row corresponding to the monitor on which to open PenRad, select the row's **DISPLAY** checkbox.
- 4. In the row's **Orders** dropdown list, select **PenRad**.
- 5. In the left pane, select **TOOLS**.
- 6. Under **Toolbar**, select **MAIN**, and then in the right pane, select the **External Tools** checkbox.
- 7. In the left pane, select **EXTERNAL TOOLS**.
- 8. Enter the following settings, and then select **ADD**.

Setting	Description
Title	PenRad
Description	PenRad
Command	exal://launch/q=
Arguments ¹ (variable filename)	<pre>patient_id={{account_no}}&accession_no={{accession_no}} &cmd=penrad&study_id={{id}}&facility_id={{facility_id}}</pre>
Arguments ² (filename)	<pre>patient_id={{account_no}}&accession_no={{accession_no}} &cmd=penrad&study_id=file&facility_id={{facility_id}}</pre>
Initial Directory	[Leave blank]
Keyboard Shortcut	Optional: Type a keyboard shortcut.
Toolbar Button	Select (adds the PenRad button to the viewer toolbar).
Do Not Base-64 Encode URL Arguments	
Use Facility ID for Subdirectory	Optional: Select to open different instances of the application that are configured for different facilities on the same Exa PACS/RIS installation.

1. Creates a study_id.xml file (e.g. if the study ID is 1234, the file created is 1234.xml).

2. Always creates a file.xml file regardless of the study ID.

Configure opening of OrthoViwer

You can configure Exa PACS/RIS viewer to open a study in OrthoView by selecting the external app button on a worklist study row.

Prerequisite: Install Exa Tool (see appendix).

- 1. On the server, use a text editor such as Notepad to open the **exatool.toml** file (default location is C:\viztek\exa\cfg).
- 2. Add or edit the file to include the following within the **[tools]** section:

```
# Materialize OrthoView
[tools.orthoview]
launchURL = 'http://server_address:90\OrthoView\start.htm'
```

- Where server_address is the IP or fqdn of the server hosting OrthoView.
- If needed, substitute http with https.
 - 3. Save and close the file.
 - 4. On the burger 🔜 menu, select **Setup**.
 - 5. Next to the burger button, select the word in all caps, and then select **User Management**.
 - 6. On the **EXTERNAL APPS** tab, select **Add**, and type the following settings.

```
Integration Name OrthoView
URL exatool:///?tool=orthoview&study_id={{study_id}}&username={{username}}
```

Note: You can use the following variables in place of, or in addition to those shown in colored text on the previous line.

{{accession_no}}	The accession number of the study
{{account_no}}	The account number of the patient
{{facility_id}}	The database ID for the facility of the study
{{study_id}}	The database ID for the study
{{user_id}}	The database ID for the currently signed-in user

7. Select SAVE.

Open a study in OrthoView

If OrthoView is installed on your server, you can use the Exa PACS/RIS worklist or viewer to open studies in OrthoView.

Prerequisite: Configure opening of OrthoView.

- 1. On the worklist, select the external app 💶 button.
- 2. In the button shortcut menu, select **OrthoView**. **Result**: Your browser downloads a .jnlp file.
- 3. Open the .jnlp file.

Lines, curves, shapes, and text

You can draw linear shapes and add text to images.

Draw lines and shapes

You can draw rectangles and ellipses on images.

1. On the viewer toolbar, select one of the following tools.

ĸ

- Rectangle
 - Ellipse
- Straight line
- Arrow

•

- 2. Drag on the image to create the shape. Optional:
- To move a shape, drag any part of its outline.
- To resize a shape, drag any of its handles.

Draw freehand lines

You can draw freehand lines on images.

- 1. On the viewer toolbar, select the pencil \checkmark tool.
- 2. Drag on the image to draw a freehand line.
- 3. Optional. You can drag any points along the line to modify it.

Draw a curved shape

You can draw curved shapes on images.

- 1. On the viewer toolbar, select the curve \square tool.
- 2. Select at least three times on the image to specify a start point, a vertex, and a second vertex.
- 3. Double-click to close the shape.

Add text

You can add a text annotation to an image.

- 1. On the viewer toolbar, select the text II tool.
- In the box, type text and then select Enter.
 Note: There is no character limit, but carriage returns are not supported, and long text may extend beyond the visible image boundary.

Markers

You can add markers to images, such as for left and right.

Add a dot

You can add a dot marker to an image.

- 1. On the viewer toolbar, select the dot 🞑 tool.
- 2. Select on the image to place the dot.

Add a vertical or horizontal line

You can add a vertical or horizontal line to an image.

- 1. On the viewer toolbar, select the vertical **III** or horizontal **III** line tool.
- 2. To add the line, select on the image.
- Drag the line to position it.
 Note: To reveal the endpoints, you can drag a vertical line up or down, or a horizontal line left or right.

Add a left or right marker

You can add a left or right marker to an image.

- 1. On the viewer toolbar, select the left O or right R marker tool.
- 2. To add the marker, select on the image.
- 3. Drag the marker to reposition it.

Measurements

You can take various linear and angular measurements of images. Completed measurements remain as annotations. To adjust measurements easily, we recommend turning on Edit mode before taking measurements (see "Edit annotations").

Measure an angle

You can measure an angle on an image.

- 1. On the viewer toolbar, select the angle 🖾 tool.
- 2. Select on the image three times to place a vertex and two endpoints.
- 3. Move the pointer to position the angle measurement, and then select to finish.

Measure a Cobb angle

You can measure a Cobb angle on an image.

- 1. On the viewer toolbar, select the Cobb angle $\stackrel{\text{\tiny def}}{=}$ tool.
- 2. Drag on the image to place the first angle line.
- 3. Drag again to place the second line.
- 4. Move the pointer to position the angle measurement, and then select to finish the angle.

Measure an HO angle

You can measure an HO angle on an image. An HO angle measures the degrees of the angle drawn relative to true vertical and horizontal.

- 1. On the viewer toolbar, select the HO angle \square tool.
- 2. Select on the image to place a starting point.
- 3. Select to place the end point.

Measure a radial angle or length

You can measure a radial angle or length on an image.

- 1. On the viewer toolbar, select the radial angle 🖿 or radial length 🏥 tool.
- 2. Select on the image to place the axes.
- 3. Drag the axes or their endpoints to take measurements.

Measure an elliptical or freehand ROI

You can measure properties of an ROI by drawing an ellipse or a freehand shape. The viewer displays the

ROI's length (mm), area (mm²), and the minimum, maximum, mean, and standard deviation in Hounsfield units.

- 1. On the viewer toolbar, select the ROI are ree ROI in tool.
- 2. Drag on the image to place the ellipse or the freehand shape.
- 3. Drag the outline or handles of the shape to adjust the ROI.

Measure a length

You can measure a length (mm) on an image.

- 1. On the viewer toolbar, select the measure \swarrow tool.
- 2. Drag on the image to place the measurement line.
- 3. Drag the outline or endpoints of the line to adjust the measurement.

Measure and compare two lengths

You can measure the lengths (mm) from two starting points to an endpoint for comparison.

- 1. On the viewer toolbar, select the M compare 🔲 tool.
- 2. Select three times on the image to place a starting point, endpoint, and second starting point.
- 3. Drag any of the three points to adjust the measurement.

Take a freehand measurement

A freehand measurement is similar to freehand ROI, but it measures different values: angle; radius

(mm); area (mm²); and length (circumference in mm).

- 1. On the image shortcut menu, select **Annotations** > **Measures** > **FH Measure**.
- 2. Select three times on the image to place a vertex and two endpoints.
- 3. Move the pointer to position the circle measurements, and then select to finish.

Find a center point

You can find the center between two reference points.

- 1. On the image shortcut menu, select **Annotations** > **Measures** > **Center Point**.
- Select twice on the image to place the first and second reference points.
 Note: The center point is indicated by an x.
- 3. Drag either of the reference points to adjust the measurement.

Draw a circle and measure its radius

You can draw a circle and measure its radius (mm).

- 1. On the viewer toolbar, select the circle \square tool.
- 2. Select twice on the image to place two loci.
- 3. Move the pointer to adjust the circle, and then select to add a third locus.
- 4. Drag any locus to resize or reposition the circle.

Spine labels

You can add preset labels for spinal vertebrae and discs to MR images. Labels are grouped by region (cervical, thoracic, lumbar, and sacral), plus another group for all discs. *Basic* labels do not include height and width measurements, whereas non-basic labels do. *3D* labels appear in all frames and planes, whereas non-3D labels appear only in the individual frames to which you add them.

Add basic spine labels

You can add basic spine labels to vertebra in ascending or descending order.

- 1. On the viewer toolbar, select the basic spine label Z tool.
- 2. In the button shortcut menu, select a region and starting vertebra. **Note:** Choose "Up" to apply labels in ascending order, or "Down" for descending.
- 3. Select on the first vertebra to add the first label, and then select on the second vertebra, and so on.

Add basic 3D spine labels

You can add basic 3D spine labels to vertebrae in ascending or descending order.

- 1. On the viewer toolbar, select the quick 3D spine label \bowtie tool.
- 2. In the button shortcut menu, select a region and starting vertebra. **Note:** Choose "Up" to add labels in ascending order, or "Down" for descending.
- 3. Select on the first vertebra to add the first label, and then select on the second vertebra, and so on.

Add 3D spine labels

You can add 3D spine labels in ascending or descending order.

- 1. On the viewer toolbar, select the 3D spine label shortcut 🜌 tool.
- 2. In the button shortcut menu, select a region and starting vertebra.

Note: Choose "Up" to add labels in ascending order, or "Down" for descending.

- 3. Select twice on a vertebra to place a starting point and endpoint.
- 4. Repeat the previous step to label additional vertebrae.

Use a spine label shortcut

You can use a spine label shortcut to quickly start labeling from a common starting vertebra.

- 1. On the viewer toolbar, select the spine label shortcut Z, 3D spine label shortcut , or 3D quick spine label shortcut Z tool.
- 2. In the button shortcut menu, select a starting vertebra.
- 3. Add labels.

3D

3D labels appear in the image where you add them, and the same slice in other series.

Use the 3D cursor

When you place the 3D cursor on one series, the cursor also appears in the corresponding location in any cell of the same study that is open in the viewer.

- 1. Open two or more series of the same study (for example, an axial, sagittal, and coronal view).
- 2. On the viewer toolbar, select the 3D cursor 🖸 tool.
- 3. Hover over an image in one cell.
- 4. The cursor appears in the same location in the other cells.

Add a 3D point

You can mark a 3D point on an image. The point you place in the current image appears in the corresponding position in all frames and planes.

1. On the image shortcut menu, select **Annotations** > **3D Point**.

2. Select on the image to place the point.

Add a 3D ray

You can mark a 3D ray on an image. The vertex you place in one frame extends as a ray through the stack and is visible in other planes.

- 1. On the image shortcut menu, select **Annotations** > **3D Ray**.
- 2. Select on the image to place the vertex of the ray.

Add a 3D ROI

You can mark a circular ROI in one image, and the program adds the ROI to the same image in other series in the viewer. The viewer displays the ROI's length (circumference in mm), area (mm²), and the maximum, minimum, mean, and standard deviation in Hounsfield units.

- 1. On the image shortcut menu, select **Annotations** > **3D ROI**.
- 2. Select twice on the image to place the center point and a tangent point.

Add a 3D length measurement

You can take a linear measurement (mm) in one image, and the program adds the measurement to the same image in other series in the viewer.

- 1. On the image shortcut menu, select **Annotations** > **3D Measure**.
- 2. Select twice on the image to place the first and second endpoints of the measurement line.

Add a 3D angle measurement

You can take a 3D angle measurement in one image, and the program adds the measurement to the same image in other series in the viewer.

- 1. On the image shortcut menu, select **Annotations** > **3D Angle**.
- 2. Select three times on the image to place the vertex and the first and second endpoints of the angle.

Triangulate images

When you click an image with the Triangulation tool, the corresponding slice appears in all other currently opened series from the same study (not priors).

- 1. Open all series of interest.
- 2. On the viewer toolbar, select the **Triangulation (** tool.
- 3. Click an area of interest in any open image.

Shutters

You can add rectangular, elliptical, or freehand shutters.

Add a rectangular or elliptical shutter

You can add a rectangular or elliptical shutter to "crop" unwanted areas of an image.

- 1. On the image shortcut menu, select **Annotations** > **Shutters** > **Shutter Box** or **Shutter Ellipse**.
- 2. Select twice on the image to place a starting point and endpoint for the shutter.

Add a freehand shutter

You can add a freehand-drawn shutter to "crop" unwanted areas of an image.

- 1. On the image shortcut menu, select **Annotations** > **Shutters** > **Freehand Shutter**.
- 2. Drag on the image to draw the shutter.

Other annotation tasks

Add an AR annotation

You can plot points to represent angular rotation.

- 1. On the viewer toolbar, select the AR AR tool.
- 2. Select six times on the image to place guide points.

Edit annotations

After you finish an annotation, it is fixed in place to prevent accidental alteration. To move, edit, or delete an annotation, either select the tool that created it, or select the edit is tool to enter Edit mode. You can select the edit tool again to exit Edit mode.

Saving and deleting annotations

You can save or delete annotations as follows.

- To save the current annotations, on the toolbar, select the save annotations $\stackrel{\frown}{=}$ button.
- To delete all annotations, on the toolbar, select the delete all annotations 🔊 button.
- To delete all annotations for the current series, on the image shortcut menu, select **Delete Series Anno**.
- To delete all annotations for the current study, on the image shortcut menu, select **Delete Study Anno**.

Annotate ultrasounds with DiA

With the DiA ultrasound analysis application you can automatically annotate 2-, 3-, and 4-chamber cardio ultrasounds, and populate SDE reports with SR measurements.

Incorrectly tagging cardio images can result in misdiagnosis. It is the user's responsibility to correctly tag series as 2-, 3-, or 4-chamber studies for purposes of DiA analysis. Neither Konica Minolta nor DiA Imaging Analysis are responsible for any outcomes resulting from mis-tagged images.

Prerequisite: Purchase a license for DiA.

- 1. Open one or more ultrasound images or series in the Exa PACS/RIS viewer.
- 2. On the toolbar, select the **DiA** ^{IM} button.
- In the center of each open frame, select the 2CH, 3CH, or 4CH button to tag the image or series as a 2-chamber, 3-chamber, or 4-chamber item.
 Note: Select only one type.
- 4. In the upper right corner of each frame, select the **SG**, **EF**, or **Both** button to perform annotation and measurement.
- 5. To save the results, select the save annotations 🗳 button.
- 6. To view the SR data, open the study in the cardio report editor.

Reset an image in the viewer

When making non-permanent modifications to images in the viewer (zoom, rotation, Window/Level etc.), you can reset the image to its original state.

• On the viewer toolbar, select the reset viewer c button.

Change elements in the viewer

Show or hide overlays

You can turn overlays on or off.

- On the viewer toolbar, select the overlay 2 button to turn overlays on or off.
- To show a preset DICOM overlay, in the image shortcut menu, select DICOM overlay, and then select an overlay.

Show or hide annotations

You can turn annotations on or off.

- 1. In the upper-right corner of a frame, right-click the menu icon \blacksquare .
- 2. In the shortcut menu, select Show Annotations.

Show series and stacks

If the viewer is showing only a single frame of a series or stack, you can change it to display all series and stacks.

● On the viewer toolbar, select the reset series and stacks Select button.

Show or hide cutlines

Cutlines show the intersection between two open series. The cutlines update dynamically as the user moves through a series. A dashed cutline indicates where the first image starts and the last image ends. A solid cutline indicates the intersection of the currently displayed locations in the series. If a series includes intersecting images, you can show or hide cutlines.

• On the viewer toolbar, select the cutlines $\begin{tabular}{ll} \begin{tabular}{ll} \begin{tabular}{ll}$

Split series by image thickness

You can use slab tools to split series by image thickness.

- 1. In the upper-right corner of a frame, right-click the menu icon **=**.
- 2. In the shortcut menu, select **Slab Tools**, and then select a slab thickness.

Recalibrate the scale

You can manually recalibrate the scale measurement, which is shown on the caliper of the current series.

- 1. In the upper-right corner of a frame, right-click the menu icon \blacksquare .
- 2. In the shortcut menu, select **Recalibrate**.
- 3. In the dialog, type a new value (mm) for the scale, and then select **OK**.

Change the series layout

You can change the number of series panels displayed in the viewer.

- 1. In the upper-right corner of a frame, right-click the menu icon **=**.
- 2. In the shortcut menu, select Series Layout, and then select a layout.

Reorder a series

You can change the order of images in a series.

- 1. In the upper-right corner of a frame, right-click the menu icon \blacksquare .
- In the shortcut menu, select **Reorder**, and then select one of the following options.
 Image Number Arranges the images by number in ascending order.

Image Number Inverse – Arranges the images by number in descending order.

Slice Location – Arranges the images by relative location (in mm) in the plane in ascending order.

Slice Location Inverse – Arranges the images by relative location in the plane in descending order.

Image Time – Arranges the images by the time they were taken.

Change the appearance of images

How the viewer chooses the initial window/level

There are many sources of window/level settings. When the viewer displays an image, it chooses the window/level settings from the first available of the following sources, in order.

- Last display state, if "Auto saved image properties on close" is turned on
- LUT (from prefetch), unless "Ignore LUT" or "Ignore Presentation LUT" is turned on
- DICOM tags the window center and window width tags
- VOI LUT DICOM tags value of interest LUT tags
- Manual W/L settings, if adjusted by the user

Turn on auto window/level

The viewer can automatically adjust the window/level so that images are, to the extent possible, neither too dim nor too bright.

• On the viewer toolbar, select the auto window/level \blacksquare button.

Adjust the window/level

You can manually adjust the window/level.

- On the viewer toolbar, select the window/level 🕺 button.
- Drag horizontally over the image to adjust the window.
- Drag vertically over the image to adjust the level.

Apply a window/level preset

You can apply a window/level preset to the current study.

• On the image shortcut menu, select **Presets**, and then select a preset.

Apply CLAHE enhancement

You can apply CLAHE to enhance local contrast.

• On the viewer toolbar, select the CLAHE **u** button to turn CLAHE on or off.

Apply bone enhancement

You can use different levels of bone enhancement to optimize the contrast between bone and other tissues. You can also apply color inversion to further highlight fractures and other features of bone.

- 1. On the viewer toolbar, select the bone enhance we button.
- 2. In the button shortcut menu, select a percentage.

Invert colors

You can invert black and white values to make certain images easier to read.

• On the viewer toolbar, select the invert colors D button.

Add color to images

You can add color to images.

- 1. Right-click the overlay in the lower-right of the image, and then in the shortcut menu, select **Palettes**.
- 2. Select a color in a palette.

Apply sigmoid processing

You can apply sigmoid processing to enhance low-contrast images.

• Right-click the overlay in the lower-right of the image, and then in the shortcut menu, select **Sigmoid**.

Reset and Reset study object

You can access the Reset and Reset study object commands in the image shortcut menu. *Reset* undoes all unsaved changes (such as W/L and annotations) made to the current series. *Reset study object* updates the viewer after new images are added to a study that is currently open.

Add to new UNQ study

A *UNQ* (unique) study is a teaching study. When you select this command in the image shortcut menu, a button appears on the toolbar to open the teaching study screen. See, "Create a teaching study."

Scaling images

Zoom images

You can zoom in on (enlarge) or out of (reduce) images for optimum viewing. There are several ways to zoom:

- On the viewer toolbar, select the zoom 🔍 tool and then drag on the image.
- Select the zoom tool in the image shortcut menu: Tools > Zoom.
- Drag the pointer across a caliper (if Caliper Zoom is selected, see "Configure other interface settings").
- Right-click the lower-right overlay, select Enter Zoom, and then type a value from .05 to 7.5.
- "Quad zoom": Use the left or right angle bracket keys (< >).

Display one to one

If you zoomed an image you can restore it to its original DICOM size. This is essentially "life size."

• On the viewer toolbar, select the one to one ¹¹ button.

Display images in their actual size

You can display images in their original size.

• On the viewer toolbar, select the actual image size 🖾 button.

Fit images to window

You can automatically zoom an image so that its longest dimension fits in the visible frame.

• On the viewer toolbar, select the fit to window 👪 button.

Use the magnifying glass

You can use the magnifying glass tool to zoom an area of the current image.

• On the viewer toolbar, select the magnifying glass tool, and then select and hold over the area to magnify.

Linking images

When two series are open side-by-side in the viewer, *linking* them causes moving through images in a second series when you move through images in the first series.

Auto link images

Auto linking means that linking turns on automatically when two or more series of the same plane (such as axial) are open. With auto-linking, the system uses the image numbers to automatically match up the frames in each series so that the frame in the second series is as near in stack order to the image in the first series as possible.

• To auto link images, on the viewer toolbar, select the auto link 🕙 button.

Manually link images

Manual linking means that you turn linking on and off manually when two or more series are open. This is frequently used to scroll through a recent image and a corresponding prior, side-by-side.

• To manually link images, on the viewer toolbar, select the manual link we button. **Note**: For mammogram images, you can only link LCC and RCC with each other; similarly you can only link LMLO and RMLO with each other.

Use the context tool

You can automatically jump to an image in a linked series that most closely matches the angle (X, Y, and Z position) of the image in the current series.

• On the viewer toolbar, select the context tool It.

Reset linked series

You can reset (undo) image linking by selecting the reset linked series \square button. This may take time depending on the size of the series.

Moving and jumping to images

Pan images

Scroll or span through images

You can scroll or span through images in a series. *Spanning* means to scroll rapidly with minimal hand motion.

To adjust the span sensitivity, see "Configure the toolbar."

- To scroll: Hover over the image and rotate the mouse wheel.
- To span: On the image shortcut menu, select Tools > Span Images, and then drag on the image.

See also:

Configure the toolbar

Flip or rotate images

You can flip images 180 degrees, or rotate them 90 degrees. From the image shortcut menu:

- Select Transformation > Flip Horizontal or Flip Vertical.
- Select **Transformation** > **Rotate Right** or **Rotate Left**.

Play cine loops

When viewing a series, you can play cine loops and shuttle between frames.

- 1. On the viewer toolbar, select the cine 🔯 button.
- 2. Cine play starts, and the media control bar appears.
- 3. Use the media control bar to pause, move to the first or last frame, and move to the previous or next frame.

Specify key images

You can specify key images in a series that you can jump to at any time. You can add key images thumbnails on reports.

- 1. Display the image that you want to be a key image.
- 2. On the image shortcut menu, select **Set Key Image**.

Jump to a key image

If you specified a key image in the current series, you can jump to it (display it in a frame in the viewer).

- 1. At the top of the thumbnail pane on the left side, select **Keyimage**. The thumbnail pane shows thumbnails of your key images.
- 2. Double-click a key image thumbnail.

Open a series image in a 1 × 1 frame

If a series is open in a layout other than 1×1 , double-click any image to open it in a 1×1 layout.

Jump to a BTO image by SR finding

To quickly open a BTO image that has a specific SR finding:

- 1. Open the tomosynthesis series that contains the image.
- 2. On the 2D or synthesized view, select the SR finding of interest. **Result**: The corresponding slice opens. Note the following:
- The slice that opens is of the same view type (e.g. select a finding on an RCC to open a BTO RCC slice).
- If the BTO series is not displayed within the current layout, the series opens next to the 2D or synthesized view in a 1x2 layout. To restore the original layout, select the backslash (\) key.

Use MPR tools

Multiplanar reformation (MPR) creates images in orthogonal planes (axial, coronal, sagittal or MIP) relative to a base image. The MPR tool is hidden until you open a series.

Perform simple MPR

You can perform simple MPR to generate a single alternate planar view from the base view. **Prerequisite**: If performing MPR on a fusion study, wait until both series are fully pre-fetched.

- 1. Open a series, and then double-click an image to view it full screen.
- 2. Select the arrow on the right side of the MPR **MPR** button.
- 3. In the button shortcut menu, select a plane.
- 4. The viewer performs MPR and displays the new plane.

Perform standard MPR

You can perform standard MPR to generate three additional planar views of the base image. **Prerequisite**: If performing MPR on a fusion_study, wait until both series are fully pre-fetched.

Open a series, and then select the MPR MPR button.

Note: The plane of the base image determines the default MPR plane.

Manipulate MPR images

You can manipulate MPR images in the following ways by using controls in the base image.

- To move through MPR images, drag the blue region bars. You can also drag the endpoints to adjust the viewing angle.
- To move both region bars at the same time, on the toolbar, select the context tool It, and then drag on the base image.
- To change the slice thickness, double-click the thickness value, and then type a new value (or drag the thickness value).
- To change the slab width, select Region, double-click the slab width value, and then enter a new value (or drag the slab width value).
- To display an MPR image full screen with a large thumbnail of the base image, double-click an MPR image.

Work with PET fusion studies

Turn PET fusion display on and off

If a PET study was fused with another study such as a CT scan, you can turn display of the fused study on or off.

- 1. To turn on fusion display, hover over the top of an image to display the image's top shortcut menu, and then select **PT**.
- 2. In the PT button shortcut menu, under **PET selection**, select a source study. "Fused" appears in the lower-left part of the image to indicate the display state.
- 3. To turn off fusion display, in the PT button shortcut menu, select Remove current PET.

Color and blend PET fusion source studies

You can add color to source studies in a PET fusion study, and control alpha blending of the two studies. Specifying a color in one image applies the color to all images in the series.

Prerequisite: Turn on PET fusion display.

- 1. In the PT button shortcut menu, under **PET selection**, select the source study to color.
- 2. In the PT button shortcut menu, under **Palettes**, select a color.
- 3. In the PT button shortcut menu, under **Alpha Blending**, select a blending option.

Work with Display Management

With the viewer's display management functions you can create and manage highly customized "DMs." The term *DM* refers to *display management* in general, or to an implementation of a hanging protocol. By using DMs you can precisely customize how images "hang" in the viewer.

Configure viewer settings for DMs

Before working with DMs, configure the settings described in the following sections in this manual.

- Configure modality-specific viewing options
- Configure mammography
- Set up connected displays

Next, configure viewer settings as follows.

- 1. On the worklist, select settings , select **Viewer Settings**, and then in the **Viewer Settings** dialog, on the left pane, select **MODALITY**.
- 2. In the list of modalities, select a modality that you work with (such as CT or MG).
- 3. To turn on DMs, in the settings area under **Options**, select the following checkboxes.
- Auto Hang DM
- DM Allow Missing Cell
- Auto Hang Priors
 - 4. To view priors, under **Prior Options**, configure the following.
 - a. Select the Auto Open Prior checkbox.
 - b. In the **Auto Open Prior Count** dropdown list, select the maximum number of priors to open at once.
 - 5. Select **SAVE.**
 - 6. Repeat for each modality that you work with.

Display images with a DM

You can select from a list of previously configured DMs to hang the current study. If you show the DM toolbar in the viewer, you can select a DM on the toolbar. If you did not show the DM toolbar:

- 1. Open a study in the viewer.
- 2. On the toolbar, select the DM 📟 button.
- 3. On the button shortcut menu, select one of the DMs in the list. Note: DMs are listed between the first item in the menu, "None," and "DM Manager."

- 4. Optional. You can change the view as follows.
- Rotate the wheel to page through any additional images in the study that the DM can hang.
- Drag a thumbnail onto a cell to display it there.
- Use the left or right bracket keys ([or]) to move to the next or previous DM step.

Show the DM toolbar

The DM toolbar gives you quick access to DM related functions. You can manually display the DM toolbar in the viewer, or configure the viewer to display the DM toolbar automatically for selected modalities.

- **Manually**: In the viewer, select the display manager button, and then in the button shortcut menu, select **Show DM Toolbar**.
- Automatically: On the viewer toolbar, select the settings [•] button. Select **MODALITY**, select modalities, select the **Show DM Toolbar** checkbox, and then select **SAVE**.

See also:

Use the DM toolbar

Use the DM toolbar

As in the following figure, the toolbar contains tools on the left, and DMs (RCC 3D and RCC/LCC Tomo) on the right side of the tools. Use the toolbar as follows.

	•	RCC	BTO RCC	BTO RCC	BTO LCC
Save	SaveStudy				
Update	Manage				
Reset	Refresh	RCC 3	D	RCC/LCC	Тото

- Save: Saves a new DM based on the current layout.
- Save Study: Saves the current configuration for the current study only.
- Update: Overwrites the current DM with properties taken from currently displayed images. **CAUTION**: Selecting this button deletes all settings of the current DM.
- Manage: Opens the DM manager.
- Reset: Select to apply any newly created or edited DMs.
- Refresh: You can also *refresh* DMs to update the list of applicable DMs.
- [DM]: Select any DM on the DM toolbar to apply it in the viewer.

Find and open a DM for editing

If you have a large number of DMs you can find a specific one, and then open it for editing.

- 1. On the viewer toolbar, select the display manager [™] button.
- 2. In the button shortcut menu, select **DM Manager**.
- In the DM Manager dialog, enter one or more of the following search criteria. User Groups – Select the group to which the DM user belongs. Users – Select the DM user. Filters – Select whether the DM is private (user-specific) or public. Modality – Select the modality associated with the DM. Name – Type all or part of the name of the DM.
 Select SEADCH
- 4. Select **SEARCH**.

DMs matching your search criteria appear in the list at the bottom of the dialog.

5. To open the DM for editing, double-click it, or select its edit 🖉 button.

Edit, delete, duplicate, or copy a DM

Each DM has four buttons on the right side of the list: 🧷 🗎 止 🖻 These buttons do the following.

Edit – Opens the DM for editing (for configuration, see "New DMs").
Delete – Deletes the DM from the list.
Duplicate – Duplicates the DM and prompts you to name the duplicate.
Copy – Sends a copy of the DM to a user group or user.

Export and import DMs

You can export DMs for use in other Konica Minolta systems.

- 1. Find and select one or more DMs to export.
- 2. Select **EXPORT SELECTED** or **EXPORT ALL**.
 - The DMs are added to a single JSON file and downloaded to your computer.
- 3. Copy the file to the destination system, display the **DM Manager** dialog, select **IMPORT**, and then open the exported JSON file.

Add a new DM

To add a DM:

- 1. On the viewer toolbar, select the display manager M button.
- 2. In the button shortcut menu, select **DM Manager**.
- 3. In the **DM Manager** dialog, select **ADD NEW DM**.
- 4. In the second DM Manager dialog, enter the following settings.
 Name Type a name for the DM.
 Inactive Select to disable the DM until ready for use.
 Private Select to make the DM available only to you.
 Modalities Select one or more modalities to which the DM applies.
 Body Part Prevents all but the selected body part to display.
 To display any body part, leave blank.
 Page Count The number of monitors that the DM uses to display images.
- 5. Under **Preview**, in the upper-left corner of the frame, select **1*****1** and select a cell layout for the study-level series/images within the monitor.
- 6. Optional. Select **1*1** in of the cells, and select a series layout for the series-level images within a cell.
- 7. Optional. To allow missing cells, in the upper-right corner of a page or cell, select the checkbox. See "About missing cells."

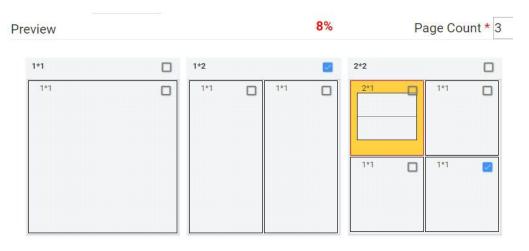


Figure. In this example, 3 pages (monitors) are configured, with 1, 2, and 4 cells added to each page, respectively. On the second page, Allow Missing Cells is selected at the page level, which means that either the left, right, or both cells can be blank. On the third page, the study will hang if images for the lower-right cell are missing, but not if they are missing in any other cells. The upper left cell is selected for adding a matching rule group and/or matching rule. Because the validation percentage is not yet 100%, matching rules must be added.

- 8. Note the validation percentage, and then select **SAVE**.
- 9. If the validation percentage was not 100%, you must add a matching rule that yields 100%. Continue to "Add a matching rule group."

About the order of DMs in the DM manager

When you open a study in the viewer, Exa PACS/RIS finds all DMs that match the study, and then hangs the study using the one that was highest in the list in the DM manager. It also makes all matching DMs available to you in the DM toolbar and in the DM button shortcut menu. You can change the default order of DMs in the DM manager by dragging them in the list.

About missing cells

By default, DM pages and cells do not allow *missing cells*. This means that if no image exists in the study that can hang in one of the cells on a page, no images hang at all on the page. For example, if you configured a DM to display a current image in the left cell and a prior in the right cell, but no prior is found, then the current image does not hang.

Sometimes it is preferable to allow missing cells. For example, if you configured your DM to display up to three priors, but only two priors are found, you still want to display the current image and the two priors.

Add a matching rule group

You can group matching rules and apply AND/OR logic to them. If set to AND, all rules in the group must be true to hang images, and if set to OR, at least one rule must be true. Adding a matching rule group is optional, but we recommend doing so for most applications.

- 1. In the DM Manager, in the list of DMs, double-click to open the DM to which you want to add a matching rule group.
- 2. Under **Preview**, select a cell.
- 3. At the bottom of the window, on the **MATCHING RULES** tab, select **ADD GROUP**. The new group initially appears as a row of buttons under the ADD GROUP button.

		ADD GROUP	ADD GENERAL RULE	ADD MAMMO RULE	ADD PRIOR RU
--	--	-----------	------------------	----------------	--------------

The matching rule group is the row of buttons on the bottom. No rules have been added to the group.

- 4. Add one or more rules to the group (see "Add a general matching rule," or "Add a mammo matching rule.")
- 5. In the list on the right side of the dialog, select a relationship of AND or OR.
- 6. At the top of the dialog, select **SAVE.**

Add a general matching rule to a DM

When you add a DM, the modality, body part, and allow missing cell settings you enter *roughly* determine which images hang where in the DM. You can also *finely* determine this by using general matching rules. In most cases you should use a general matching rule, but for mammography, see "Add a mammo matching rule to a DM."

General matching rules consist of an argument, logical operator, and matching value. For example: Study Date (arg.) is Less/Equal (operator) to 01/02/2003 (matching value).

- 1. Open the DM to which you want to add matching rules.
- 2. Under **Preview**, select the cell to which to apply the rule.
- 3. At the bottom of the window, on the **MATCHING RULES** tab, select **ADD GENERAL RULE**. **Note**: If you created a group and you want the rule to be included in the group, select the button that is inside the group.
- 4. In the Matching Tag dialog, enter the following settings.
 DICOM Tag/Field Select a tag or field to use as the argument.
 Operator Select an operator.
 Matching Value Type a matching value, and then select the plus sign.
- 5. Modify the rule until the validation percentage is 100%, or add another rule.
- 6. Select **SAVE**.
- 7. In **DM Manager**, select **SAVE**.

Add a mammo matching rule to a DM

If you assigned the MG modality to a DM, you can add mammography matching rules to it. Mammo rules take the form of mammography-specific properties; if an image matches all properties the DM is applied.

- 1. Open the DM to which you want to add mammo rules.
- 2. Under **Preview**, select a cell.
- At the bottom of the window, on the MATCHING RULES tab, select ADD MAMMO. RULE.
 Note: If you created a group and you want the rule to be included in the group, select the button that is inside the group.
- 4. In the Mammo Rule dialog, enter the following settings.

Setting	Options	Description
Side	Left Right ?	Left breast Right breast Either
View	[Various]	Select the primary breast view.
DON'T CARE	[Various]	Select the secondary breast view. Selecting

Setting	Options	Description
		DON'T CARE allows any of the secondary views to display <i>except</i> ID.
Processing Type	Unprocessed Tomosynthesis CView Processed ?	Raw images 3D images 2D images taken from a tomosynthesis study Standard 2D images Images without the "0008,0068" Presentation Intent Type DICOM tag.
Image Index	ANY 1-20	Images of any index can hang Only an image of the selected index can hang.

- 5. Modify the rule until the validation percentage is 100%, or add another rule.
- 6. Select **SAVE**.
- 7. In **DM Manager**, select **SAVE**.

Add a prior matching rule to a DM

To hang priors, add a prior matching rule to the destination DM cell.

- 1. Open the DM to which you want to add prior rules.
- 2. Under **Preview**, select a cell.
- 3. At the bottom of the window, on the **MATCHING RULES** tab, select **ADD PRIOR RULE**. **Note**: If you created a group and you want the rule to be applied to the group, select the button that is inside the group.
- 4. In the **Prior Rule** dialog, select the index of the prior that you want to hang in the cell. **Note**: Selecting ANY allows you to scroll through all available priors when viewing a single DM.
- 5. Select SAVE.
- 6. In **DM Manager**, select **SAVE**.

Add a mammo rule for breast implant displacement

You can create a DM for breast views that allows you to displace (effectively hide) the implant.

- 1. Add a mammo rule to a DM cell, and in the **DON'T CARE** list, select **ID**.
- 2. When viewing implant images, rotate the wheel to switch between displaced and non-displaced views.

About the DM validation percentage

The DM validation percentage helps you by indicating, roughly, the percentage of cells in a DM you are configuring that would not display any images under the current settings. To achieve 100 percent, apply a valid condition or rule to each cell in the DM. If the percentage is not 100, Exa PACS/RIS prevents you from using the DM at all. You can view the percentage by opening a DM for editing; the percentage appears on the right side of the Preview area title.

Use the Display Management tab

To automatically apply additional processing to all images that hang in a DM, you can use the Display Management tab in the DM manager.

- 1. In **DM Manager**, open a DM, and then select a cell.
- 2. On the **DISPLAY MANAGEMENT** tab, enter the following settings.

Setting	Description
Auto-Orient	[Unused]
Rotation	Select a degree of clockwise rotation.
Mirror	Select to switch the left and right breast view.
View	Select a zoom type.
Invert Sigmoid Linear CLAHE Fusion	Select one or more processing functions to apply.
CAD	Select to display CAD values according to the SR CAD settings ("see Configure mammography") when the user reaches this step of the hanging protocol.
LUT	Select an LUT to apply.
Bone Enhance	Select a percentage of bone enhancement.
Window/Level	Select Default or Custom. If Custom, type the values to apply.
Reprocess	Select to generate an additional view from the base view.

3. Select **UPDATE**, and then **SAVE**.

Create a DM from an existing layout

To create a DM more quickly, you can arrange a layout in the viewer, and then save it as a DM.

The rules that are created with this method include as many parameters from the source studies as possible, and may be overly restrictive for general use, or apply unexpected image processing. Therefore to ensure proper hanging and rendering, review the resultant rules in both the MATCHING RULES and DISPLAY MANAGEMENT tabs and modify if necessary.

- 1. In the viewer, open a study and configure the display to your liking.
- 2. On the toolbar, select the DM button, and then in the button shortcut menu, select DM Save.
- 3. In the **DM Information** dialog, type a name for the DM and select or clear the **Private** checkbox.
- 4. Select **SAVE**.

Example DM with a general matching rule

In this example we add a DM for viewing chest X-rays with an AP view on the left and a lateral view on the right. Continuing after step 3 of "DM examples:"

Add the DM

- 1. In Name box, type CHEST TEST.
- 2. the **Modality** list, select **CR**, and then select **DX**.
- 3. In the **Page Count** box, type or select **1**.
- 4. Under **Preview**, on the page header, select **1*****1** and select a 1 x 2 cell layout.

Add a rule group and general rules for the left cell

1. Select the left cell, and on the MATCHING RULES tab, select ADD GROUP.

- 2. In the new group, select **ADD GENERAL RULE**.
- 3. In the **Matching Tag** dialog:
 - In the **DICOM Field/Tag** list, select **Modality**.
 - In the **Operator** list, select **Equal**.
 - In the Matching Value box, type **CR**, select the plus (+) button, and then select **SAVE**.
 - **Note**: In practice you may also want to add the DX modality.
- 4. Following the previous step, add another general rule:
 - **DICOM Field/Tag** = SeriesDescription
 - **Operator** = Contains
 - Matching Value = ap
- 5. On the right side of the matching rule group, in the list, select **AND**. This means that the image must satisfy both rules to hang in the cell.

Add general rules for the right cell

- 1. Select the right cell, and select **ADD GENERAL RULE**.
- 2. In the Matching Tag dialog, add the following rule:
 - **DICOM Field/Tag** = SeriesDescription
 - **Operator** = Contains
 - Matching Value = lat
- 3. Next to **Preview**, confirm that the validation percentage is 100%.
- 4. Select **SAVE**, and then close the DM manager.
- 5. Select **F5** to update the viewer with your new DM.

Example DM for ultrasound

In this example we add a DM that hangs a 3 x 2 series layout (3 rows, 2 columns) of only ultrasound images. Continuing after step 3 of "DM examples:"

Add the DM

- 1. In Name box, type US TEST.
- 2. the Modality list, select US.
- 3. In the **Page Count** box, type or select **1**.
- 4. Under **Preview**, select the 1*1 cell (not the page header), and select a 3 x 2 series layout.

Add a general rule for all images

- 1. Select inside of the page's 1*1 cell to highlight everything around the 3 x 2 series-level cells.
- 2. Add the following general rule.
 - **DICOM Field/Tag** = Modality
 - Operator = Equal
 - Matching Value = US
- 3. Confirm that the validation percentage is 100%, and then save the DM.

Example DM for mammography

In this example we add a DM that hangs a 2 x 2 layout of mammography images. Only MG images can hang, current study images appear in the top 2 cells, and any of the first available priors hang in the bottom 2 cells. Continuing after step 3 of "DM examples:"

Add the DM

- 1. In Name box, type MG TEST.
- 2. the **Modality** list, select **MG**.
- 3. In the **Page Count** box, type or select **1**.
- 4. Under **Preview**, select **1*1** (at the top of the page), and select a 2 x 2 cell layout.

Add a mammo rule group and mammo rule for the upper-left cell

- 1. Select the upper-left cell, and then select ADD GROUP.
- 2. In the new group, select **ADD MAMMO RULE**.
- 3. In the Mammo Rule dialog, add the following rule.
 - Side = Right
 - View = CC Family
 - DON'T CARE
 - **Processing Type** = Processed
 - Image Index = ANY
- 4. Select SAVE.
- 5. On the right side of the matching rule group, in the list, select **OR**.

This means that the image must satisfy at least one rule to hang in the cell.

Add a mammo rule group and rule for the upper-right cell

- 1. Select the upper-right cell, create a new group, and then add the following mammo rule to the new group.
 - Side = Left

All other settings = Same as previous for upper-left cell

Add a mammo rule group, mammo rule, and prior rule for the lower-left cell

- 1. Select the lower-left cell, add a group, and add the same mammo rule that you added for the upper-left cell, (Side = Right).
- 2. In the current mammo rule group, select **ADD PRIOR RULE**.
- 3. In the Prior Rule dialog, in the Study Index list, select ANY, and then select SAVE.

Add a mammo rule group, mammo rule, and prior rule for the lower-right cell

- 1. Select the lower-right cell, add a group, and then add the same mammo rule that you added for the upper-right cell (Side = Left).
- 2. Add the same prior rule that you added for the lower-left cell.
- 3. Confirm that the validation percentage is 100%, and select **SAV**E, and **SAVE** to save the DM.
- 4. Close the DM manager. In the viewer, select **F5** to update and view your DM.

Add a DM group

To keep different sets of hanging protocols for different appointment types and studies, you can combine DMs into groups.

- 1. On the burger 🔲 menu, select **SETUP**.
- 2. Next to the burger button, select the word in all caps, and then select **DICOM**.
- 3. On the **HANGING PROTOCOLS** tab, under **DM Group**, select the plus ⁺ button.
- 4. In the **DM Group** dialog, on the left, type descriptive information for your DM group.
- 5. Under **Associate group to study by**, do one of the following:
- Select **APPOINTMENT TYPE**, select one or more appointment types in the list, and then select **SAVE**.
- Select STUDY DESCRIPTION. In the Study Description box, type a description, and then select the plus + button.
- 6. Click **SAVE**.

Share DMs with a DM group

To add (share) DMs with a DM group:

- 1. On the burger 🔲 menu, select **SETUP**.
- 2. Next to the burger button, select the word in all caps, and then select **DICOM**.
- 3. On the **HANGING PROTOCOLS** tab, find a DM to add to a group.
- 4. On the right, select the share \checkmark button.
- 5. In the **Share** dialog, select the group with which to share the DM, and then select **SHARE**.

Share DM groups with users

By default, DM groups that you create are only available to you. To share a DM groups with other users or user groups:

- 1. On the burger 🔜 menu, select **SETUP**.
- 2. Next to the burger button, select the word in all caps, and then select **DICOM**.
- 3. On the **HANGING PROTOCOLS** tab, under **DM Group**, select a DM group to share.
- 4. On the right, select the edit \checkmark button.
- 5. In the Edit DM Group dialog, select SHARE.
- 6. In the **Copy** dialog, select users or groups with which to share the DM group, and then select **COPY**.

Gather information from images

View pixel values in Hounsfield units

You can view the value of a selected pixel in Hounsfield units.

• On the viewer toolbar, select the Hounsfield units ^{Hu} tool, and then select and hold the mouse button on the pixel of interest.

Display DICOM values

You can display the DICOM tag values associated with the current image by doing one of the following.

- On the viewer toolbar, select the DICOM values 🗉 button.
- On an image shortcut menu, select **View** > **DICOM Values**.

Export DICOM values

When you view DICOM values in the viewer you can export them to a CSV. This CSV file can **only** be displayed correctly in **Notepad**, **Notepad++**, or **Wordpad**.

- 1. On an image shortcut menu, select **View** > **DICOM Values**.
- 2. In the title bar of the screen that appears, select the download Subtron. **Result**: The file is downloaded to your Windows Downloads folder.

Print images

You can print the current image, series, or study to a TWAIN (non-DICOM) printer. It is a convenient, less-expensive alternative to DICOM printing, but is not suitable for diagnostic purposes.

- 1. On the viewer toolbar, select the print 🕒 button.
- In the Print Image dialog, enter the following settings.
 Layout Select the number and arrangement of frames per page.
 Page Size Select the paper size and print orientation.
 Compress large images Select to compress large images (for lower quality but faster printing).
 Selected Image Select to print the current image.

Selected Series – Select to print all images in the current series. **Current Page** – Select to print the current image in all displayed frames. **All Images** – Select to print all images in the current study.

- 3. Select Print.
- 4. In the Windows print dialog, configure options and select **Print**.

Open a third-party application or function

If you configured a third-party application or function, you can open it from the toolbar.

• On the viewer toolbar, select the external tool button corresponding to the item to open.

Download images

You can download images and series from studies to your desktop in various formats.

- To download the selected image as a PNG (regardless of the current series layout), on the image shortcut menu, select **Download Image**.
- To download each image in the current series as a separate file, on the image shortcut menu, select **Download Series**, and then select the file format.

View CAD findings

The Exa PACS/RIS viewer automatically displays image markers contained in SR data from supported manufacturers such as iCAD, DiA, and CureMetrix (such as the CureMetrix mammography calcification and density markings). To control which markings to display, select options in the SR CAD list (see "Configure Mammography").

Work with Advanced Peer Review

Configure peer review

With purchase of a separate license, Exa PACS/RIS provides an advanced workflow for conducting peer reviews of approved studies. Before using advanced peer review, perform the following configuration tasks included in this section.

- Set up peer review by using existing roles, groups, and users <OR>
 - Set up peer review by creating new roles, groups, and users
- Link peer review users to resources
- Configure peer reviewing provider filters

Set up peer review by using existing roles, groups, and users

Current users of Exa PACS/RIS probably already configured user roles, groups, and users. If so, perform the following steps to give peer review functionality to users by adding the appropriate rights to the relevant user roles. If one or more roles, groups, or users are not yet configured, skip to "Set up peer review by creating new roles, groups, and users."

- 1. On the burger menu, select **Setup**.
- 2. Next to the burger button, select the word in all caps, and then select **User Management**.
- On the USER ROLES tab, double-click the relevant user role.
 Note: The user role must be one that is assigned to the user group whose members you want to be peer reviewers.
- 4. In the **User Role Permission** area, select the **PeerReview** checkbox.
- 5. Select **SAVE & CLOSE**.
- 6. Continue to "Link Peer Review users to resources."

Set up peer review by creating new roles, groups, and users

Configure a new user role for peer review

To add peer review to an existing user role, see "Set up peer review by using existing role, groups, and users." To create a new user role for peer review, complete the following steps.

- 1. On the burger 🔲 menu, select **Setup**.
- 2. Next to the burger button, select the word in all caps, and then select **User Management**.
- 3. On the **USER ROLES** tab, select **ADD**, type a name and description of the role, and the select **SAVE**.

For example, type PR, and then select **SAVE**.

- 4. In the User Role Permission area, select the PeerReview checkbox.
- 5. Select any other rights that you want to assign to peer review users.
- 6. Select **SAVE & CLOSE**.

Configure a new user group for peer review

To add peer review to an existing user group, see "Set up peer review by using existing role, groups, and users." To configure a new user group for peer review, complete the following steps. **Prerequisite**: Configure a peer review user role.

- 1. On the burger 🔲 menu, select **Setup**.
- 2. Next to the burger button, select the word in all caps, and then select **User Management**.
- 3. On the **USER GROUPS** tab, select **ADD**, and then enter the following settings.

Setting	Description
Group Code	Type your internal code for the group. For example, PR.
Group Name	Type your internal name for the group. For example, Peer Review.
Group Description	Type a description of the group.
Document Types	Select the document types that group members can access. For example, select All Documents .
Roles	Select all user roles having peer review rights, and any other roles that you want the group members to have.
Navigation	Select the areas of the program that group members can access (items available on the burger menu).

4. Select **SAVE**.

Configure a new user for peer review

To add peer review to an existing user, see "Set up peer review by using existing role, groups, and users." To configure a new user for peer review, complete the following steps.

Prerequisite: Configure a peer review user group.

- 1. On the burger menu, select **Setup**.
- 2. Next to the burger button, select the word in all caps, and then select **User Management**.
- 3. On the **USERS** tab, select **ADD**, and the enter the following settings.

Setting	Description
Group Name	Select the user group to which the peer review user role is assigned.
Name	Type the user's name.
Mobile Phone/Email	Type the user's contact information.
User Name	Type a sign in user name for the user.
Login with Google	When selected, the user can sign in through their Google account.
Password	Type a sign in password for the user.
Session Interval	Type or select the number of minutes before the user's session times out.
Allow Emergency Access	Type an amount of time to assign admin rights to non-admin users.
Access Expires After	Type and select a duration after which the user's account expires. Leave blank to keep the account open indefinitely.
One-Time Access	When selected, the user can sign in only one time.
User Must Change Password Next Login	Select to force the user to create their own unique password after signing in the first time.
Assign Claims to Follow-Up	Select to allow assigning of claims to another user for completing

Queue for Another User	Follow-Up on denied claims.
User can Change Accounting Dates	When selected, the user can edit accounting dates under Billing > Payments.
Dragon 360	Select to make Dragon available to the user.
Market	Select the markets that the user can view and modify.
Facilities	Select the facilities that the user can view and modify.
Linked Provider User Type	Select the user type if linking to one.
Hide Order Menu	[Unused]

4. Select **SAVE**.

5. Continue to "Link Peer Review users to resources."

Link peer review users to resources

To enable peer review workflow, you must link your peer review users to a Provider-Radiology resource.

- 1. On the burger 🔜 menu, select **Setup**.
- 2. Next to the burger button, select the word in all caps, and then select **Providers & Resources**.
- 3. On the **RESOURCE** tab, select **ADD**, and then enter the relevant settings. Most are selfexplanatory, but note the following.

Setting	Description
Туре	Select Provider-Radiology.
Code	Type your internal resource code.
Facilities	Select the facilities that can use the resource.

4. Select **SAVE**.

- 5. On the LOGIN DETAILS sub-tab, select a user, and then select LINK USER.
- 6. Select **SAVE & CLOSE**.

Configure peer reviewing provider filters

Exa PACS/RIS automatically assigns random studies to each peer reviewing provider that are relevant to those providers. To specify which studies are relevant to which providers, configure filters for each peer reviewing provider as follows.

- 1. On the burger 🔜 menu, select **Setup**.
- 2. Next to the burger button, select the word in all caps, and then select **Providers & Resources**.
- 3. On the **RESOURCES** tab, double-click the provider to configure.
- 4. On the **PEER REVIEW** sub-tab, enter filtering criteria.

For example, if the provider can only review studies from the "Radiology Mart" facility:

- a. Under Facility, select Is.
- b. In the list of facilities, select Radiology Mart.

Note: A study must meet all of the criteria you specify here to be available to the provider for peer review.

Note: Leave settings blank to include all items in the filter. For example, leave the Study Description setting blank if the provider can review studies with any description.

5. Select **SAVE**.

Use peer review

Enter topic text here.

Assign a peer reviewer for a study

Exa PACS/RIS automatically appoints peer reviewers and adds studies to their MY PEER REIVEW worklist filters. Additionally, users with "Peer Review manual appointment" rights assigned to them by a radmin can manually appoint peer reviewers for their studies with the following procedure.

Prerequisite: Configure peer review (see "Configure peer review").

- 1. On the worklist, right-click a DICOM study, hover over **Exam**, and then select **Assign Study**.
- 2. In the **Study Assignment** dialog, on the **Assign for peer review** dropdown list, select a peer reviewer.
- 3. Select SAVE.

Reassign peer review

You can reassign a previously appointed peer review.

- 1. On the burger 🔲 menu, select **Setup**.
- 2. Next to the burger button, select the word in all caps, and then select **User Management**.
- 3. Select the Assigned Studies tab, and then the PEER REVIEW sub tab.
- 4. Select one or more studies, right-click, and then select **Reassign**.
- 5. In the **Appoint Peer Reviewer** dialog, appoint a new peer reviewer and select **SAVE**.

Conduct a peer review of a study

When peer reviewing users sign in to Exa PACS/RIS, a MY PEER REVIEW worklist filter appears with all studies assigned to the user for peer review.

- 1. On the worklist, on the **MY PEER REVIEW** tab, double-click a study to peer-review. The symbols accompanying studies indicate the following:
 - Awaiting first review
 - Awaiting second review
 - Awaiting third review (disagreement)
- 2. In the **Peer Review** panel, select buttons on the toolbar to open any panels you need to conduct the review.



Buttons: Peer Review (always ON), Prior Reports, Documents

- 3. Optional. To add documents, in the **Documents** area, select **FULL SCAN** (display options before scanning) scan or **QUICK SCAN** (scan without options).
- 4. In the top-right corner of the **Peer Review** area, select an agreement level, and then type comments as needed.
- Select one of the following: SKIP – Withhold your review temporarily and return to the study later. SUBMIT & NEXT – Submit your review and open the next study in your list. SUBMIT – Submit your review.

About peer review disagreements

The worklist provides a Peer Review Disagreements tab for administrators that lists all peer-reviewed studies for which a reviewer selected *Disagree*. On the Peer Review Disagreements tab, administrators can reassign a study to a specific user for a third opinion, or dismiss the study, such as when a third

opinion is not available. Users who are assigned for a third opinion peer review receive the study in their My Peer Review tab, and perform the new peer review in the usual manner.

Manage peer review disagreements

To manage peer review disagreements:

Prerequisite: Sign in as an administrator with the Peer Review manual appointment user right.

1. In the upper right corner of the worklist, select the disagreement button.



- 2. In the **PEER REVIEW DISAGREEMENTS** tab, right-click a study, and then:
 - To get a third opinion, select **Reassign for Additional Review**, and then appoint a new peer reviewer (see "Appoint a peer reviewer for a study").
 - To dismiss the study, select **Dismiss Study**.

Create a peer review report

You can generate a report that shows details on studies that were peer-reviewed. **Prerequisite**: The user's user role must include the Peer Review Operational right.

- 1. On the burger 🔲 menu, select **Reports**.
- 2. Next to the burger button, select the word **REPORTS**, and then select **Peer Review Operational**.
- 3. Enter filtering criteria, and then select a button corresponding to the format in which you want to generate the report.

Work with Patient Kiosk

What is Patient Kiosk?

Patient Kiosk is an add-on module for Exa PACS/RIS that streamlines the check-in process. You must purchase a separate license to use it.

For Patients

Patient Kiosk is a web-based program on a touchscreen device at a healthcare provider's facility to check in for appointments, view and update demographic and insurance information, and complete and sign electronic forms. Checking in through Patient Kiosk ensures that patients are correctly matched to their records.

For Staff

Staff can use functionality within Exa PACS/RIS to process appointments and information coming from patients using Patient Kiosk.

Configure Patient Kiosk

Make study forms available on Patient Kiosk

You can configure study forms to be available for viewing and signing on Patient Kiosk. To add a study form to a study, see other sections in this manual.

- 1. On the burger 🔲 menu, select **SETUP**.
- 2. Next to the burger button, select the word in all caps, and then select **General**.
- 3. On the **FORM BUILDER** tab, double-click the form that you want to make available.
- 4. In the left pane, on the **ASSIGN** sub-tab, select the **Viewable on Patient Portal** checkbox.
- 5. Scroll down to **Facility**, and select the checkboxes for the facilities where the form will be available.
- 6. Select SAVE.

Configure the wait time monitor

The wait time monitor appears in the upper right corner of the patient arrival worklist. It is similar to the TAT and STAT monitors on the traditional worklist, but indicates how long and how many patients have been waiting since sign-in. By default, the monitor includes three time bands (10, 20, and 30 minutes), but you can change the number of bands, their colors, times, and descriptions.

- 1. On the burger 🔜 menu, select **SETUP**.
- 2. Next to the burger button, select the word in all caps, and then select **Office**.
- 3. On the **COMPANY** tab, select the **APP SETTINGS** sub-tab, and then in the left pane, select **Patient Arrival Wait Time**.
- 4. In the right pane:
 - To add a new band, at the bottom of the list, enter settings (such as Description and Color).
 - To edit an existing band, double-click it in the list, and change settings as needed.
- 5. Select **SAVE.**

Use Patient Kiosk as a patient

Sign in as a patient

Patients can use Patient Kiosk to sign in at the point of care. To start, tap a facility or type its name to search. Next:

- 1. On the Welcome page:
 - New patients: Tap New patient, and then skip to step 3.

- **Existing patients**: Tap Existing patient.
- 2. On the **Check-in** page:
 - If you were given a check-in code prior to arrival, tap **Check-in code**. On the **Check-in Code** page, enter your code, select the **I agree to the HIPAA privacy notice** checkbox, and then tap **Check In**.
 - If you do not have a check-in code, tap **Patient portal credentials**, enter your credentials, select the **I agree to the HIPAA privacy notice** checkbox, and then tap **Check In**.
- 3. On the **Demographics** page, enter or edit your personal information, and then tap **Next**.
- 4. On the **Contact information** page, enter or edit your contact information, and then tap **Next**.
- 5. On the **Responsible party** page, enter or edit information for the entity paying for the procedure, and then tap **Next**.
- 6. On the **Primary insurance** page, enter or edit information for your primary insurance provider, if any, and then tap **Next**.

Note: If you do not know the ULI, PHN, or other details, you can leave them blank for now.

- 7. On the **Secondary insurance** page, enter or edit information for the secondary insurance provider, and then do one of the following.
 - If the Submit button appears, tap it to finish sign-in.
 - Tap **Next**, and continue to the next step.
- 8. On the **Forms** page:
 - a. In the **Who Is Signing** list, select the signer.
 - b. In the **Name** box, type the name of the signer.
 - c. Tap a form in the list, read/edit the form, and then tap SAVE.
 - d. Use your finger or stylus to sign your name in the signature box, and then tap **Save Signature**.
 - e. Repeat for all other forms in the list, and then tap **Submit**.

Use Patient Kiosk as a healthcare staff member

What is the patient arrival worklist?

The *patient arrival worklist* is a screen within Exa PACS/RIS that staff can use to manage the patient check-in process. When a patient signs in for an appointment by using Patient Kiosk, a patient row is added to the patient arrival worklist. In that worklist, staff can quickly view which patients have arrived, check in patients for scheduled or unscheduled appointments, add or edit patient demographics, take receipt of electronically signed patient intake forms, and perform other registration tasks.

Generate a check-in code for a patient


To facilitate patients checking in for their appointments through Patient Kiosk, you can either configure a patient portal account (see "Add or edit a patient's portal account,") or provide them with a check-in code.

- 1. On the worklist, on the **PRE ORDERS** tab, open an order.
- 2. In the edit study screen, on the left pane, select **PATIENT INFORMATION**.
- 3. Select CHECK-IN CODE.
- 4. Send the code to the patient by using email, phone, or other means.

Identify a patient's registration status

The color of each patient symbol on the patient arrival worklist indicates the registration status.

- 1. On the burger imenu, select **PATIENT ARRIVAL WORKLIST**.
- 2. On the left of each patient row, find one of the following symbols.



- New patient, or matching record not found. Requires searching for a matching record
 (see "Search for a patient") and/or verification (see "Verify patient sign-in information.")
- Sign-in information differs from the patient chart, requires verification.

View patient details

You can quickly view primary demographics and insurance information from the patient arrival worklist.

- 1. On the burger Henner select **PATIENT ARRIVAL WORKLIST**.
- 2. In the **Facility** button list, select your facility.
- 3. Select a patient row to view details.

Identify a patient's wait status

The color of the square on each row of the patient arrival worklist indicates how long the patient has been waiting to be checked in. By default, the colors indicate the following wait times. To change the colors and times, see "Configure the wait time monitor."

- Waiting for less than 10 minutes
- Waiting for up to 10 minutes
- Waiting for 11 to 20 minutes
 - Waiting for 21 to 30 minutes

Find or create a patient chart

If a patient checks in as an existing patient but the system could not find a matching patient chart, the patient's registration is indicated by the 💿 symbol. For such patients you can manually search for and attach the patient chart or create a new patient chart directly from the patient arrival worklist.

Find the patient's chart

- 1. On the burger menu, select **PATIENT ARRIVAL WORKLIST**.
- 2. In the **Facility** button list, select your facility.
- 3. In the patient shortcut menu, select **Patient Search**.
- 4. In the **Patient Search** dialog, enter search criteria and then double-click a patient in the list of results.
- On the patient arrival worklist, within the patient record, select:
 Accept Use the demographics entered by the patient
 Reject Use the demographics from the patient chart
- 6. Optional. Select **Edit Patient Information** to edit demographics.

Create a new <u>patient</u> chart

- 1. On the burger imenu, select **PATIENT ARRIVAL WORKLIST**.
- 2. In the **Facility** button list, select your facility.
- 3. Select the patient row to expand the record and then select **Create New**
- 4. Fill in the patient chart (see "Create a new patient chart" and "Edit basic patient information").

Verify patient demographics and sign-in information

You can check information that a patient entered in the kiosk upon sign-in.

1. On the patient arrival worklist, select a patient row to view details.

The information	on appears as follows.
Green	Information that the patient added or edited during check-in
Black	Original, unchanged information.
(Parens)	Information prior to editing by the patient during check-in.

- 2. Select one of the buttons to accept or reject all new and edited information.
- 3. If you want to accept some, but not all changes, first accept the changes, and then open the patient chart and modify the incorrect information.

Open the patient chart from the patient arrival worklist

You can open a patient chart of an existing patient from the patient arrival worklist.

- 1. On the burger 🔜 menu, select **PATIENT ARRIVAL WORKLIST**.
- 2. In the **Facility** button list, select your facility.
- 3. On the patient row, select the patient ¹/₂ button to open the patient chart.

Check in a patient for a scheduled appointment

If the patient symbol is blue, and has a study scheduled within the next 12 hours, you can check in that patient. If a patient has multiple studies scheduled for a single visit, all of the studies are checked in at once.

Prerequisite: Verify patient details.

- 1. On the burger menu, select **PATIENT ARRIVAL WORKLIST**.
- 2. In the **Facility** button list, select your facility.
- 3. Select the patient row, and then select **Check In All**. The patient is checked in, and the row is removed from the patient arrival worklist.

Create a walk-in appointment

If a patient signs in to the patient kiosk who does not have an appointment, you can create a walk-in appointment for that patient.

- 1. On the burger imenu, select **PATIENT ARRIVAL WORKLIST**.
- 2. In the **Facility** button list, select your facility.
- 3. Select the patient row, and then select **Walk-in Appointment**.
- 4. In the **New Appointment** screen, create the walk-in appointment.

Add documents at check-in

If you receive documents to attach to the patient's record or study, follow these steps.

- 1. On the burger Honn, select **PATIENT ARRIVAL WORKLIST**.
- 2. Right-click a scheduled patient row, and then select **Upload**.
- 3. In the **Patient Document** screen, scan or upload documents as needed.

Work with the patient chart

Exa PACS/RIS gives you full viewing access to patient demographics, and lets you add, edit, and import a *patient chart* (or an *electronic medical record* or *EMR*). The edit study screen contains much of the same information as the patient chart.

Find and open a patient chart

Find a patient chart by entering search criteria

You can find an existing patient chart by searching on various patient demographics.

- 1. On the burger Harnenu, select **PATIENT**.
- 2. On the **Patient** screen, select the **SEARCH** tab.
 - **Note**: If the tab bar is hidden, select the arrow O next to Patient to display it.
- 3. In the **Starts With** dropdown list, select a target for your search criteria. This target applies to all boxes in the search bar.
- 4. In the **All** dropdown list, type or select a search filter (these are typically facilities).
- 5. In the search bar, in one or more of the boxes, type one or more characters. The results appear in the **PATIENT SEARCH RESULTS** list.

Example

To find "John Smith:"

- 1. Select Starts With.
- 2. Select All.
- 3. In the Last Name box, type Smi, and in the First Name box, type Jo.

Find a patient chart by scanning a driver's license

You can find an existing patient chart by scanning a driver's license.

- 1. On the burger **menu**, select **PATIENT**.
- 2. On the Patient screen, select the SEARCH tab.

Note: If the tab bar is hidden, select the arrow 🙆 next to Patient to display it.

- 3. Select SCAN LICENSE.
- 4. Use your barcode reader to scan the driver's license. The results appear in the **PATIENT SEARCH RESULTS** list.

Open and view the patient chart

After finding a patient chart (see "Find a patient chart by entering search criteria" or "Find a patient chart by scanning a driver's license"), you can open it to view patient demographics and other information. For more information about each of the tabs within the patient chart, see the corresponding topic under "Edit study screen."

- 1. Find a patient chart, and then double-click it. The patient chart opens with the PATIENT INFORMATION tab.
- 2. To view more information, next to the **Patient** page title, select **2**, and then select a tab (such as PATIENT GUARANTOR, or INSURANCE PROFILES).

Send reports from the patient chart

You can send approved reports by email or fax directly from the patient chart.

- 1. Open a patient chart, and then select the **STUDIES** tab.
- 2. In the list of studies, right-click a study containing an approved report, select **Send Report**, and then select **Fax/Email**.

- 3. In the **Send Report** dialog, in the **Send Fax** and/or **Send Email** sections:
 - a. In the **Send To** dropdown list, select a category of recipient.
 - b. In the dropdown list on the right, select an individual recipient.
- 4. Select SEND FAX and/or SEND EMAIL.

Access confidential patient records (break the glass)

In emergencies you can use the Break the Glass function to open patient records that are usually off limits. All Break the Glass operations are added to the audit trail report. Users of type Associated Patients Only can also "break the glass" from the New Appointment screen. To "break the glass" on the physician's portal, or in the patient chart search screen:

On Physician Portal

Prerequisite: Configure access reasons (see, "Configure app settings").

- 1. On the **My Exams** worklist, select the **Break the Glass** checkbox.
- 2. In the **Break the Glass Warning** dialog, use the search tools to find a patient, and then doubleclick the patient record.
- 3. In the second **Break the Glass Warning** dialog, in the **Access Reason** list, select a justification for accessing the confidential record.
- 4. In the **Verify Your Credential** boxes, type your portal sign-in credentials, and then select **ACCEPT**.

Result: Studies for the selected patient appear in the My Exams screen.

On the Patient screen

- 1. On the burger Henner, select **Patient**, and select the **Break the Glass** checkbox.
- 2. Find a patient chart in the usual manner.

About VIPs

VIPs (very important patients) are patients who the facility wants to identify for special consideration by healthcare staff. A gray star appears next to patient names on the worklist, the patient chart, and other areas of the program. With the appropriate user rights, a user can select the VIP star to change it to a solid $\frac{1}{2}$ star and thereby designate the patient as a VIP.

solid \succ star and thereby designate the patient as a VIP.

Create and modify a patient chart

About the patient ID, MRN, and account number

The patient ID (PID) is usually the same as the MRN or account number. When they differ, often it is because the PID comes from DICOM sources and the account number comes from RIS sources. This can happen when an incoming DICOM study with an existing PID conflicts with a receiver rule, and Exa RIS compensates by creating a unique account number. Also, staff often enter account numbers manually when creating pre-orders for new patients, because no PID would exist yet.

Edit basic patient information

You can edit or add new information to a patient chart.

- 1. Find and open a patient chart.
- 2. On the **PATIENT INFORMATION** tab, type or select information in the available fields. Most fields are self-explanatory, but note the following.

Setting	Description
Market	Select the market that serves the patient. All facilities in the selected market become selected in the Facilities list.

Setting	Description
Facilities	Set by default depending on the default location of the user who created the patient record. If the patient is created at the time of scheduling, it is set by default to the facility where the exam is being scheduled.
DICOM Patient ID	Set by default to the DICOM study tag patient ID or MRN, if any exists. See "About the patient ID, MRN, and account number."
Account No./Alt	The account number and optional alternate account number associated with the default AE. See "About the patient ID, MRN, and account number."
Racial/Ethnic	Select all that apply.
Ordering Facility	Select a facility in the dropdown list, and then select the plus button to add it to the patient record. You can select multiple facilities.
Email/SMS Consent	Select Opt In to send appointment reminder emails to the patient, and to include the email address in the appointment confirmation screen.
Language	The patient's preferred language.
[Driver's license information]	Enter manually. You can also select SCAN LICENSE and use your barcode reader to capture the license number and state.
Users Assigned	Select a user in the dropdown list, and then select the plus button to add it to the patient record. You can select multiple users.

3. Select **SAVE**.

You can enter information in the other tabs in the patient chart. Search this manual for the name of the tab for details.

Add vital signs

You can add new vital signs to a patient's history.

- 1. Find an open a patient chart.
- 2. On the VITAL SIGNS tab, select ADD.
- 3. In the Vital Signs Details area, enter vital signs and then select SAVE.

View a history of vital signs

You can view a history of patient vital signs, and view reports of specific categories of vitals.

- 1. Find an open a patient chart.
- 2. Select the **VITAL SIGNS** tab.
- 3. Optional. To view charts of vitals by category, in the upper-right part of the editing pane, select CDC, PR, BMI, TEMP, or BP.

Assign a guarantor for a patient

If the patient requires a guarantor for legal or insurance purposes, you can add one to the patient's chart.

- 1. Find an open the patient's chart.
- 2. On the **PATIENT GUARANTOR** tab, select **ADD**.

3. Enter the information for the guarantor, and then select SAVE.

About alternate account numbers

Patients receive a different MRN, PID, or account number when they undergo exams at different facilities. When Exa PACS/RIS receives such external studies, you can merge them into the master patient record by linking the external MRNs, PIDs, or account numbers as *alternate account numbers* of the Exa PACS/RIS account number. The benefits of this are:

- The viewer opens images from all records at once
- Any subsequently incoming studies having one of the account numbers are automatically linked to the other account numbers
- Helps prevent duplicate patient records
- Reduces the need to merge patient records

Configure alternate account number functionality

To be able to use alternate account numbers, perform the following procedures.

Configure an issuer of a PID

The *issuer of a PID* is an alias for the facility that issued the incoming PID (or MRN, or account number). You must configure an issuer of a PID in advance for each facility whose PIDs you want to use as alternate account numbers.

Some issuers require a standardized format for account numbers. You can prevent users from entering invalid account numbers by typing a regular expression against which the account number must match. Exa PACS/RIS will validate all future account number entries against your regular expression.

- 1. On the burger 🔜 menu, select **SETUP**.
- 2. Next to the burger button, select the word in all caps, and then select **DICOM**.
- 3. On the **ISSUERS** tab, select **ADD**, and type a name for the issuing entity.
- 4. In the **Pattern** box, type a regular expression for validating PID/account numbers for the specified issuer.
- 5. Select SAVE.

Configure an AE for use with alternate account numbers

For each application entity that receives studies whose MRNs, PIDs, or account numbers you want to use as alternate account numbers:

- 1. On the burger 🔲 menu, select **SETUP**.
- 2. Next to the burger button, select the word in all caps, and then select **DICOM**.
- 3. On the **AE TITLE** tab, double-click an AE in the list to open it.
- 4. Under **Issuer Type**, select the type. If you select **Static**, in the **Issuer** dropdown list, select the issuer.
- 5. Select **SAVE.**

Configure a receiver rule for use with alternate account numbers

For each relevant receiver rule:

- 1. On the burger 🔲 menu, select **SETUP**.
- 2. Next to the burger button, select the word in all caps, and then select **DICOM**.
- 3. On the **RECEIVER RULES** tab, double-click a receiver rule in the list to open it.
- 4. Under **Rule Information and Filter**, select the **Issuer of Alternate Account Number** checkbox.
- 5. Select **SAVE**.

Use alternate account numbers

To use alternate account numbers to link multiple patient records, complete the following steps. **Prerequisite**: Perform the procedures under "Configure alternate account number functionality."

- 1. On the burger **menu**, select **PATIENT**.
- 2. On the **Patient** screen, find the patient and open the patient chart.
- 3. On the **PATIENT INFORMATION** tab, select **MANAGE ALTERNATE ACCOUNT NUM/IDENTIFIERS**.
- 4. In the Alternate Account Num/Identifiers dialog, select ADD.
- 5. In the **Issuer Name and Type** dropdown list, select an option, and then type the alternate account number or identifier.
- 6. Select the **Country** and **State**.
- Select SAVE.
 You can repeat this procedure to add multiple alternate account numbers.

See also:

About alternate account numbers Configure alternate account number functionality

Create a new patient chart

You can create a new patient chart.

- 1. On the burger 🔜 menu, select **PATIENT**.
- 2. On the Patient screen, select the SEARCH tab.

Note: If the tab bar is hidden, select the arrow **next** to Patient to display it.

- 3. Select **CREATE NEW**.
- 4. Type, select, or scan information in the available fields. For more information, see "Edit basic patient information."
- 5. Select **CREATE PATIENT**.

Import a patient chart

You can import a patient record (.CSV) into Exa PACS/RIS. If the patient already exists in Exa PACS/RIS, you can update the existing record with the imported information, or create a new record.

Note: To view which fields must be present for the update to be successful, select the help ? button on the right side of the PATIENT IMPORT button.

- 1. On the burger 🔲 menu, select **PATIENT**.
- 2. On the **Patient** screen, select the **SEARCH** tab.

Note: If the tab bar is hidden, select the arrow 🙆 next to Patient to display it.

- 3. Select **IMPORT PATIENT**.
- 4. In the **Import Patient** dialog, select **Choose File**, and then browse for and select the file containing the patient record.
- 5. Optional. To update an existing patient record, select the **Update Existing** checkbox.
- 6. Select **IMPORT**.

Merge patient records

If the DOB, gender, first name, and last name of a new patient record are the same as an existing patient record, Exa PACS/RIS prepends "FIX_" to the account number of the record in the worklist. You can fix these records by merging them with the existing record. This can occur in such cases as a name change due to marriage or divorce, an updated account number, or an error in patient entry. You can use the following tasks to merge patient records.

Find a "FIX_" study

- 1. On the search bar of the worklist, in the **ACCOUNT NO**. box, type fix and then select **Enter**.
- 2. In the list of results, copy the account number (without the "FIX_" prefix) of a study.
- 3. Paste the account number in the **ACCOUNT NO.** box, and then select **Enter**.
- 4. In the list of results, compare the "FIX_" record with the other record to determine whether they are for the same patient.

Merge records

If you determine that two records are for the same patient, you can merge them.

- 1. On the burger **m**enu, select **PATIENT**.
- 2. On the **SEARCH** tab, in the **MRN** box, enter the account number of the records to merge.
- 3. In the list of results, select the row containing the patient record that you *do not* want to keep.
- 4. On the right side of the row, select the settings which button, and then select **Merge**.
- 5. Repeat the previous two steps for the row containing the patient record that you *do* want to keep.
- 6. In the **Patient Merge** screen, confirm that the selected records are correct, select **MERGE**, and then select **OK**.

Work in the dispatching dashboard

The dispatching dashboard is where you work with Mobile RAD. It provides a view of the worklist for entering and tracking mobile studies. Before using the dispatching dashboard, you must configure the following study statuses and add them to a study flow.

Status	Code
Assigned	AS
Accepted	ASAC
Rejected	RJ

To customize any other statuses you may need, contact your Konica Minolta sales representative.

See also:

Configure study statuses

View, create, and assign orders

View the worklist from the dispatching dashboard

- 1. On the burger Hanner menu, select **DISPATCHING DASHBOARD**.
- 2. To view all studies, select the **ALL** tab.
- 3. To view all pre-orders, select the **PRE-ORDERS** tab.
- 4. To view all orders with any order-related status that are not assigned to technicians or vehicles, select the **TO BE DISPATCHED** tab.

Create a new order for dispatch

The Pre-Orders tab in the dispatching dashboard shows all studies in the Ordered status. You can dispatch these orders (see "Assign an order"), or create a new order by following this procedure.

- 1. On the burger Hann, select **DISPATCHING DASHBOARD**.
- 2. On the **TO BE DISPATCHED** tab, in the upper right corner, select a facility, and then select the **New Order** button.
- 3. In the **New Appointment** screen, find a patient and schedule a study as you typically would, but note the following on the **APPT. INFO.** tab:
 - In the **Ordering Facility** dropdown list, select only if that facility—rather than the place of service—acquires the exam.
 - Under Schedule Information, you must select options in the Place of Service dropdown list.
 - The **Requesting Date** is optional.
 - Optional. Under **Schedule Information**, type an entry in the **Justification of Mobile Service** box to appear in the mobile app.
- 4. Select **CREATE ORDER**.

Assign an order

All studies that do not have a technologist or vehicle assigned in an Ordered, Scheduled, Confirmed, or other related status appear in the To Be Dispatched tab. To initiate these orders, assign them as follows.

- 1. On the burger 🔜 menu, select **DISPATCHING DASHBOARD**.
- 2. On the **TO BE DISPATCHED** tab, right-click an order, hover over **Dispatch**, and then select **Create New Dispatch**.
- 3. In the **Dispatch** screen, enter the following settings.

Setting	Description
[Dispatch resource dropdown list]	Select Technologist to assign the order to a technologist. Select Vehicle to assign the order to a vehicle.
Date/Time	Select a date and time to dispatch the resource.
Dispatch To	Type to search for a resource of the type selected previously, and then select a specific resource in the list of results.
Dispatch Orders	Select all orders to which you want to dispatch the selected resource.

4. Select **DISPATCH**.

Note: A dispatch number is automatically created, which you can view in the worklist.

What happens after assignment?

After assigning an order, the order moves through the following steps.

- It appears in the **ASSIGNED** tab of the dispatching dashboard, and in the mobile app.
- The technologist accepts the assignment on the mobile app, and then the order moves to the **DISPATCHED** tab on the dispatching dashboard in Exa PACS/RIS.
- The technologist taps Tech Start on the mobile app, performs the exam, and then taps Tech End. The order moves to the **COMPLETED** tab in the dispatching dashboard.
- On the Exa PACS/RIS worklist, the order appears with images on the **ALL STUDIES** tab in the Tech Start, Incomplete, Unread, or other related status.

Group order by dispatch ID

When dispatch of one or more orders and exams is completed, the Exa PACS/RIS assigns the same dispatch ID to all of the orders and exams. Grouping orders and exams by dispatch ID enables you to apply and evenly divide transportation fees, setup fees, and "after hours" pricing to the orders and exams. These orders and exams remain open until set to Check Out/Complete, during which time they can be modified (by adding, editing, or removing exams or other services).

- 1. If an open dispatch ID exists, right-click an order, and in the **Dispatch** sub-menu, select **Add to Open Dispatch**.
- 2. Select the open dispatch ID to add to the new dispatch group.

Perform query and retrieve

You can query a server and retrieve studies.

Prerequisite: Configure DICOM settings of the server to query, and configure DICOM settings for Exa PACS/RIS on the server.

- 1. On the burger Hennu, select **QUERY/RETRIEVE**.
- 2. In the dropdown list on the left side of the QUERY button, select a server to query.
- 3. Type criteria in the search bar and do one or more of the following.
- To query the server, select **QUERY**.
- To retrieve all matching studies, select **RETRIEVE**.
- To retrieve some matching studies, select the studies, right-click, and then select Retrieve.

Work with scheduling

A typical scheduling workflow

This section lists topics in the order that you would typically follow to schedule an exam. For other tasks, see "Other scheduling tasks."

Find an available time slot

You can begin scheduling by finding an available time slot in the *schedule book*, which is a calendar-style view of appointments by time and modality.

- 1. On the burger Henry, select **Schedule** to open the schedule book.
- 2. On the menu bar, in the **FACILITY** button list, select the facility for the exam.
- 3. Optional. If you configured a schedule filter, you can select it from the **FILTER** button list list.
- 4. To move to the day of the exam, on the navigation bar, select **PREV** or **NEXT**.
- 5. Double-click an empty time slot in the column for the exam's modality.
- 6. Continue to "Set up a patient."

Set up a patient

After finding an available time slot, you can start to schedule an exam by setting up a patient. To set up a patient, you have three options: create a new patient; import a patient; or find an existing patient. **Prerequisite**: Start from "A typical scheduling workflow."

Create a new patient

- 1. On the New Appointment screen, select the PATIENT tab.
- 2. Under Patient Search, select CREATE & SCHEDULE.
- 3. Type the primary demographics (name, Patient ID, etc.) for the patient.
- 4. Continue to "Enter appointment information."

Import a patient

- 1. On the **New Appointment** screen, select the **PATIENT** tab.
- 2. Under Patient Search, select PATIENT IMPORT.
- 3. On the right side of the **PATIENT IMPORT** button, select **Choose File** or **Browse**.
- 4. In the **Open** dialog, browse for and select the patient file, and then select **Open**.
- 5. Optional: To merge the patient that you are importing with an existing patient, select the **Update Existing** checkbox.
- 6. Select IMPORT.
- 7. Continue to "Enter appointment information."

Find an existing patient

- 1. On the New Appointment screen, select the PATIENT tab.
- 2. Under **Patient Search**, select a search mode in the dropdown list (Starts With, Ends With, or Contains).
- 3. Type all or part of a patient demographic in one or more of the boxes. Optional: If the **Break the Glass** checkbox appears, you can select it to search for confidential patient records. See "Access confidential patient records."
- 4. In the list of search results, double-click the patient whose exam you want to schedule.
- 5. If the Recent Schedule dialog appears, select NEW SCHEDULE.
- 6. Continue to "Enter appointment information."

Enter appointment information

You can enter general information about the appointment and exam, and add preconfigured studies to perform.

Prerequisite: Start from "A typical scheduling workflow."

- 1. In the **New Appointment** screen, select the **APPT. INFO** tab.
- 2. Under **Appointment Information**, enter or modify the following settings.

Setting	Description
Location	The facility where the exam will be performed.
Modality	The modality for the exam.
Appointment Type	Type in the box to search dynamically for an appointment type, and then select one in the list. You can search by description or code number. See also "About procedure codes, appointment types, and appointment type procedures."
Available Date	The date of the time slot you selected. You can select the calendar button to change the date.
Resource	The modality room you selected. Not available for editing in this screen.
Ordering Facility Location	Type in the box to search dynamically for the ordering facility, and then select one in the list. For more advanced searching, select the magnifying glass tool.
Referring Physician	Type in the box to search dynamically for the referring physician, and then select one in the list. For more advanced searching, select the magnifying glass tool.
Ordering Physician	Type in the box to search dynamically for the ordering physician, and then select one in the list.
Attorney	Select an attorney in the dropdown list, if applicable.
Stat Level	Select an urgency for the exam.
Code and Units	When you select an appointment type, the corresponding code appears in the code field, and any available default units for the code appear. Edit the units if needed.
[<i>Settings in the right column of the page</i>]	The Reading Physician and other settings in this column are optional. Exa PACS/RIS will assign the Station, Department, Institution, and Accession number automatically at another time during the scheduling workflow.
Select study detail options	Select details to add to the appointment information that is not included by default. Select APPLY TO ALL STUDIES to add the selected information to all studies that you schedule.

3. Under **Diagnostic Codes**, type search criteria and select the search Q button.

- 4. Select a diagnostic code in the list.
- 5. Continue to "Enter schedule information."

Enter schedule information

After entering appointment information, you can enter optional details about the appointment and the attending patient.

Prerequisite: Start from "A typical scheduling workflow."

1. On the **APPT. INFO.** tab, scroll beyond Diagnostic Codes, and then under **Schedule Information**, enter the following information.

Setting	Description
Source	Select the requester of the exam.
Patient Location	Select the intended destination (such as department) of the patient at the facility.
Patient Room No.	Type the room number for the patient's treatment.
Patient Condition	Select the current mobility status of the patient.
Place of Service	Select a place of service category.
Technologist	Type or select the technologist or vehicle performing the procedure.
Supervising Physician	Type or select the supervising physician for the procedure.
Requesting Date	Select the requested date for the exam.
Remind Me for Earlier Appointment	Select if the patient would like to be notified if an earlier time is available.
Transportation	Select the patient's mode of transportation to the facility for the exam.
Injury Date	Select the date of onset or injury.
Referral Number	Type the referral number, if available.
Patient's Condition Related To	Select whether the patient's condition is related to their employment, auto accidents, or other accidents. Alberta configuration: Select an area and nature of injury.
Accident State	If you selected a condition previously, type the two-letter abbreviation for the state or province where the condition occurred.
Schedule Notes	Type schedule notes.
Justification of Mobile Service	If dispatching mobile services, type the justification.

2. Continue to "Enter insurance information."

Enter insurance information

After entering appointment information, you can enter information about the insurance provider handling payment for the exam.

Prerequisite: Start from "A typical scheduling workflow."

1. In the **New Appointment** screen, select the **INSURANCE** tab, and then under **Primary Insurance**, enter the following information.

Setting	Description
Existing Insurance	If the patient record already includes insurance providers, they appear in the dropdown list. Select one, if available. Information for the provider you select appears in the other fields.
Carrier	If no existing insurance providers are available, select a carrier here. Information for the carrier you select appears in other fields, but <i>you must enter some fields such as the group name and or health number manually</i> .
Group Name	Type the provider group name.
Relationship	The relationship defaults to "Self."
DOB	Select the subscriber's date of birth.
Sex	Select the patient sex.
[Address]	Type or select the city, state, and postal code of the subscriber.
Subscriber Name	Type the name of the subscriber.
Benefit On Date	Select the start date of benefits. Optional: Select Verify to verify benefits.
Health Number	Type the subscriber's policy health number.
Version Code	Type the subscriber's health card version code.
Valid From/To Date	Select the dates during which the policy is valid.
[Address]	Type the street address of the subscriber.

2. In the **Other Physician** dropdown list, select a physician, and then select the plus button to add the physician to the list. You can add multiple physicians.

Note: When the exam report is completed, if **Reports to me** is configured (see, "Deliver reports"), Exa PACS/RIS automatically sends a copy of the report to the physicians selected here.

3. Under **Patient Alerts**, select one or more checkboxes relevant to the patient undergoing the exam.

Note: To add a new alert, at the bottom of the **Patient Alerts**, type a new alert and select the plus button.

4. Continue to "Attach study forms."

Attach study forms

After filling out additional appointment information, you can fill out study forms such as for consent, HIPAA, and CT screening, and attach the forms to the appointment. You can have the patient verify the accuracy of the information in the form at the time of the exam.

Prerequisite: Start from "A typical scheduling workflow."

- 1. In the **New Appointment** screen, select the **STUDY FORMS** tab.
- 2. In the **Study Forms** dropdown list, select a form.
- 3. The name of the form appears under the Study Forms dropdown list.
- 4. To fill out the form, select its edit \checkmark button.
- 5. Fill out the form, and then select **SAVE.**

Note: To make the form available on the patient portal, select the Patient Portal checkbox.

6. Continue to "Create an order."

Create an order

After entering all information related to an appointment, you can create an order. In this topic, *creating an order* means to finalize the appointment, add it to the schedule book (except for walk-in appointments), and make it available in RIS and the worklist.

Prerequisite: Start from "A typical scheduling workflow."

- 1. On the **New Appointment** screen, select the **APPT. INFO** tab.
- 2. Select ADD STUDY.
- 3. A study appears in the list based on the information entered for the exam.
- 4. Select **CREATE ORDER**.

Result: Depending on settings, one of the following happens.

- The schedule book appears, showing the scheduled appointment
- The edit study screen appears
- The confirmation screen appears
- 5. Optional. To view a quick summary of the exam in the schedule book, hover over the exam block.

Other scheduling tasks

This section describes scheduling tasks that were not covered in "A typical scheduling workflow."

Schedule a follow-up

If users specify follow-up exams, you can view a list of the specified exams and schedule them.

- 1. On the burger menu, select the arrow on the right side of SCHEDULE, and then select **PENDING FOLLOW-UPS**.
- 2. On the **Pending Follow-Ups** screen, enter filtering criteria and then select **Enter**.
- 3. Double-click an exam in the list, and complete scheduling tasks.

See also:

Specify a follow-up exam

Track referrals

As part of your scheduling "to-do" list, you can view a list of referrals that are awaiting scheduling, and track their scheduling status. To enter referrals, see "Refer a patient."

- 1. On the burger \blacksquare menu, select the arrow \rightarrow on the right side of SCHEDULE, and then select **PENDING REFERRALS**.
- 2. On the **Pending Referrals** screen, enter the date range and facility of the referrals that you want to view, and then select the search Q button.
- 3. Double-click a referral in the list.
- 4. In the Referral Status dialog, select a status, type notes, and select SAVE.

Create a quick block

You can create a *quick block* to specify time slots for non-exam events such as lunch breaks, or for dedicated use such as all-day training. *Soft quick blocks* are partial room reservations, and you can schedule exams over them. Soft quick blocks are semi-transparent on the schedule book. *Hard quick blocks* are full room reservations, and you cannot schedule exams over them. Hard quick blocks are opaque on the schedule <u>b</u>ook.

- 1. On the burger 🖾 menu, select **Schedule**.
- 2. On the menu bar, select **QUICK BLOCK**.

- 3. On the calendar, drag within a column to place a block.
- 4. In the **SCHEDULE TEMPLATES** screen, create a schedule rule for the quick block.
- 5. Select **SAVE**.

See also:

Edit or delete schedule blocks Configure a schedule template and schedule rules

Set no-shows

A *no-show* is a scheduled appointment that the patient did not attend. You can create a list of studies by type and date range, and then change the status of all studies in the list to "No-show."

- 1. On the burger Hanner menu, select **Schedule**.
- 2. Following, or on the right side of the menu bar, on the navigation bar, select **SET NO-SHOWS**.
- 3. In the filtering dialog, enter a date range, select one or more statuses, and then select **NO-SHOWS**.
- 4. In the **No-Shows** screen, if necessary, refine the list by adjusting search criteria.
- 5. To change the status of all studies in the list to "No-show," select **SAVE.**

Print the schedule book

- 1. On the burger 🔲 menu, select **Schedule**.
- 2. Under the menu bar, on the navigation bar, select the print 🕒 button.

Edit an appointment

You can edit the information in an appointment directly from the schedule book.

- 1. On the burger Hanner menu, select **Schedule**.
- 2. Double-click the schedule block in a time slot to open the edit order screen.
- 3. In the **Edit Order** screen, edit the information as needed. **Note**: For more information, see "Edit study screen."
- 4. Select SAVE.

Reschedule an appointment

On the burger menu, select **Schedule**, find an appointment on the schedule book, and then choose one of the following methods to reschedule the appointment.

Drag the appointment block

To move the appointment to a later time within the same day and same modality room, you can drag the appointment block to a new slot on the calendar.

Use the reschedule bucket

To move the appointment to a different day, you can use the *reschedule bucket*.

- 1. Right-click the appointment block, and then in the shortcut menu, select **Reschedule**. The appointment moves from the calendar to the reschedule bucket (bottom of the screen).
- 2. Find an available time slot on the calendar.
- 3. Drag the appointment block from the reschedule bucket to the new time slot.
- 4. In the confirmation dialog, select **OK**.

Shorten or lengthen the appointment

To change only the end time of the appointment, you can resize the appointment block.

- 1. Select the appointment block.
- 2. Hover over the bottom edge of the block, and then drag the orange bar up or down to shorten or

lengthen the appointment.

Make quick changes to appointments

You can make several quick changes to the status, priority, flagging, and other aspects of appointments without having to open and edit them.

- 1. On the burger 🔜 menu, select Schedule.
- 2. Right-click an appointment block and use the shortcut menu to do the following.

Setting	Description
Change Status	Hover over Change Status , and then select a new status. Modifies workflow elsewhere in the program.
Priority	Hover over Priority , and then select a new priority. Modifies workflow elsewhere in the program.
Flag	Add flags in the submenu to act as customizable filtering options.
Stat	Select a new urgency level.
Edit Study	Select to open the edit study screen.
Exam Prep Instructions	View exam prep instructions. If no instructions were entered, an "x" appears on the right side of the command in the shortcut menu.
Appointment Confirmation	Display the appointment confirmation screen.
Cancel	Cancel the appointment.
Reschedule	Reschedule the appointment.
Attach Files	Opens the Patient Document screen. See "View or add patient documents."
Log	Opens the audit log screen. See "View and export audit logs."

Cancel an appointment

You can cancel an appointment from the schedule book.

Prerequisite: The appointment must be in the Confirmed or subsequent status.

- 1. On the burger Honor, select **Schedule**.
- 2. On the schedule book, right-click the appointment that you want to cancel, and then select **Cancel**.
- 3. In the **Order** dialog, in the **Cancel/Delete Reason** dropdown list, select a reason for the cancellation.
- 4. If you select "others" in the previous step, in the **Reason** box, type a reason.
- 5. Select **SAVE.**

Use the Find Slots feature

Find slots is an advanced feature for finding appointment times. It can be easier to find a time slot first, and then schedule an <u>app</u>ointment in it.

- 1. On the burger Hanner menu, select **Schedule**.
- 2. In the schedule book, on the menu bar, select **FIND SLOTS**.
- 3. In the Available Slots screen, in the Patient ZIP Code box, type the patient's ZIP or postal

code.

Note: If you arrived at this screen from the patient chart or burger menu, the program does not display this box.

- 4. **Distance from Patient** dropdown list, select a search radius.
- 5. In the **Appointment Type** dropdown list, select an appointment type.
- 6. Optional. Enter additional criteria in the **Facility**, **Modality Room**, **Date**, **Start Time**, and **End Time** fields.
- 7. Optional. If more time is needed for the exam than the standard duration, select **Additional Time**.

Result: Available time slots that meet the criteria appear in a list. **Note the following**:

- The program suggests slots at facilities nearest to the patient based on ZIP/postal code.
- To select all facilities or modalities, make no selection or select Select all.
- Time slots overlapping soft quick blocks are accompanied by a pink square.
- Time slots overlapping hard quick blocks are omitted from the list.
 - 8. In the list of time slots, select a slot.
 - 9. Optional. To schedule another appointment, select **ADD APPOINTMENT**, and then repeat the steps.
 - 10. Select **CREATE ORDER**.
 - 11. Perform scheduling procedures.

Schedule appointments back to back

You can select to schedule multiple appointments back to back, which means that Exa PACS/RIS will present you with time slots that are available for all of the appointments on the same day at the same facility.

- 1. On the burger 🔜 menu, select **Schedule**.
- 2. In the schedule book, on the menu bar, select **FIND SLOTS**.
- 3. In the **Available Slots** screen, in the **Patient ZIP Code** box, type the patient's ZIP or postal code.

Note: If you arrived at this screen from the patient chart or burger menu, the program does not display this box.

- 4. **Distance from Patient** dropdown list, select a search radius.
- 5. In the **Appointment Type** dropdown list, select an appointment type.
- 6. In the **Appointment Type** dropdown list, select the next appointment type. Repeat to select three or more appointment types.
- 7. In the Group Schedule dialog, select BACK-TO-BACK.
- 8. In the **Max Delay** dropdown list, select the maximum amount of wait time between time slots. **Note**: The Same Day option shows all available slots regardless of delay.
- 9. Enter additional scheduling criteria, and then select a slot.
- 10. Select **CREATE ORDER**.
- 11. Perform scheduling procedures.

Walk-in appointments

To immediately admit patients who do not have a previously scheduled exam, you can schedule a walk-in appointment. Walk-ins are considered exceptions and do not appear on the schedule book, but they do appear in the worklist so that staff can make accommodations.

- 1. On the burger 🔲 menu, select **Schedule**.
- 2. In the schedule book, on the menu bar, select **WALK-IN APPOINTMENT**.
- 3. On the **New Appointment** screen, set up a patient (see "Set up a patient").

- 4. If the **Recent Schedule** screen appears, select **NEW SCHEDULE**.
- 5. On the **New Appointment** screen, on the **APPT. INFO** tab, in the **Modality** dropdown list, select a modality.
- Exa PACS/RIS fills in the **Available Date** box with the current date and time.
- 6. In the **Appointment Type** dropdown list, select an appointment type.
- 7. Select ADD STUDY, and then select CREATE ORDER.

Change the time block duration on the schedule book

You can change the duration of time blocks on the schedule book.

- 1. On the burger \blacksquare menu, select Schedule.
- 2. On the schedule book, right-click anywhere in the left margin where the times of day appear.
- 3. Select a duration.

About the appointment confirmation screen

If configured (see the "Auto-Open Appointment Confirmation" setting), the appointment confirmation screen appears after creating an order. It provides a convenient summary of appointment-related information that you can share with patients. In the appointment confirmation screen you can:

- Select a study card under Exam Details to jump to the edit study screen.
- Type an email address and select Email to send the information.
- Select Print to print the information.
- Select Fax and enter the fax number to fax the information.
- Verify the appointment with AHS.

Edit or delete schedule blocks

You can edit or delete schedule blocks directly on the schedule book.

Prerequisite: Sign in as a user with the Schedule Block user right.

- 1. On the burger Hanner menu, select **Schedule**.
- 2. On the schedule book, select a schedule block, and then select its edit button. **Result**: Depending on the type of block, one or more editing and/or deleting option appears.
- 3. Select an option, and if editing, make changes in the editing screen.

About auto-blocks

When you schedule an exam in a timeslot to which a schedule rule applies, and the schedule rule specifies a particular resource to perform the exam (for example, a technologist), Exa PACS/RIS does the following.

- Checks to see if the technologist is also available to work in other modality rooms at the same time.
- If so, and if Autoblocking is enabled in the schedule rule, automatically creates schedule blocks in the other time slots to prevent future users from double-booking the technologist.

These schedule blocks appear on the schedule book as "Auto-Block with Study ID," and the Allow Scheduling option is disabled. You can edit auto-blocks like any other schedule block.

Automatically retrieve priors from an external PACS

When a patient is referred from another facility, it can be efficient to automatically retrieve priors from the referrer's PACS that are not already present in Exa PACS/RIS, and to control the timing of that retrieval. That is, you can configure Exa PACS/RIS to retrieve priors when it becomes likely that the exam will take place (such as when confirmed by the patient), but not so close to exam time (such as upon check-in) that waiting to fetch priors could delay reading. To set up automatic retrieval, follow this example in which we configure Exa PACS/RIS to retrieve priors when the study changes from Scheduled to

Confirmed status.

- 1. Configure a query/retrieve AE.
- 2. Configure a routing rule with the following settings.

Setting	Description
Rule Name	Q/R Old PACS
Туре	QUERY/RETRIEVE
AE Title	Select the query/retrieve AE you configured earlier.
Priority	1
Attempts	10
Priors	10
Modality	Modality of Current Study
Summary - Field	Patient Identifier
Account Number	Select to query the external PACS by the patient's account number, alternate account number, or alternate account number via issuer.
Issuer	Select the issuer
Name	Select Yes to include the patient's name in the query.
DOB	Select Yes to include the patient's date of birth in the query (in the format YYYY-MM-DD).

3. Configure a study flow from Scheduled to Confirmed status using the previous routing rule.

See also:

Configure application entities Configure routing rules Configure study flow

Work with billing

Exa Billing is a module of the Exa platform that lets you manage all aspects of the billing workflow from claim submission and receiving payments to preparing detailed financial reports.

Viewing claims

Find and view studies or claims

You can search for a study or claim and open it to view details.

- 1. On the burger 🔲 menu, select **BILLING**.
- 2. On the top navigation bar, select Studies or Claims.
- 3. Select a filter tab, such as **ALL CLAIMS**.
- 4. To find a study or claim, in the search bar, do one or both of the following:
- Type or select one or more criteria and select Enter.
- Select a column header to sort the list.

Note: For tips on searching, see "Search syntax."

5. Double-click a study or claim in the list to open it for viewing.

Set the default tab for the study or claims list

You can specify which tab appears when you open the study or claims screen.

- 1. On the burger 🔜 menu, select **BILLING**.
- 2. On the top navigation bar, select **Studies** or **Claims**.
- 3. On the toolbar, select the filter M button.
- 4. In the **Claim Filter** dialog, in the **Default Tab** dropdown list, select the default tab.

Create a filter for the study or claims list

You can create a new filter for the studies or claims list.

- 1. On the burger 🔲 menu, select **BILLING**.
- 2. On the top navigation bar, select **Studies** or **Claims**.
- 3. On the toolbar, select the filter M button.
- 4. In the Study Filter or Claim Filter dialog, select ADD.
- Type a name and order for the filter.
 Note: The *filter order* determines the placement of the filter as a tab and list item.
- 6. Select one or both of the following.
 Global Filter Select to make the filter available to all users.
 Display as a Tab Creates a tab on the Studies or Claims page with your filter applied.
 Display in Dropdown Adds your filter to the Default Tab dropdown list.
- 7. Under the blue line, enter filtering criteria.
- Select SAVE.
 Note: You may have to refresh your browser for changes to take effect.

View a patient claim summaries

You can view an aggregated summary of available patient claims.

- 1. On the burger Hennu, select **BILLING**.
- 2. On the top navigation bar, select **Claims**.
- 3. In the list of claims, find a claim for a patient whose summary you want to view.
- 4. Right-click the claim, and then select **Patient Claims**.
- 5. Optional. To modify the contents of the summary, select or clear these checkboxes:
- Include Billing Provider Info Select to include billing providers

- Include All Comments Select to include claim comments
- Include Third Party Payers Clear to exclude insurance providers
- 6. Select **PRINT**.
- 7. Optional. To move to the next patient claim summary in the **Claims** screen, select **NEXT**.

View a patient claim quick summary

You can view a claim summary in a read-only pop-up window.

- 1. On the burger 🔜 menu, select **BILLING**.
- 2. On the top navigation bar, select **Claims**.
- 3. In the list of claims, find a claim for a patient whose summary you want to view, and select its claim summary is button.

View a claim-by-claim history

You can view and edit details on all available individual claims for a patient.

- 1. On the burger 🔲 menu, select **BILLING**.
- 2. On the top navigation bar, select **Claims**.
- 3. In the list of claims, find a claim for a patient whose history you want to view, and select its claim

inquiry button.

The inquiry screen appears with the claim that you selected.

- 4. To add claim notes or comments, in the **Transaction Detail** area, select **ADD**.
- 5. To scroll through claims, do the following.
- To view the next claim, in the upper-right of the inquiry screen, select NEXT.
- To view the previous claim, in the upper-left of the inquiry screen, select **PREVIOUS**.
 - 6. Optional. To view a claims inquiry, select **PATIENT CLAIMS**.

Entering claims

Enter a claim for a study

You can find a study and then enter a claim based on the information in that study. This procedure applies to studies that are completed but unbilled. For other charges, see "Enter a non–study-related claim." An Encounter number of 1 is automatically added to new claims, and you can change this to a number between 1 and 9.

Prerequisite: Add a billing provider (see, "Configure a billing provider").

- 1. On the burger 🔜 menu, select **BILLING**.
- 2. On the top navigation bar, select **Studies**.
- 3. Right-click a completed study (for example, with a status of "Read") for which you want to enter a claim, and then select **Create Claim**.
- 4. In the **Claim Creation** dialog, on the **CHARGES** sub-tab, select **NEW CHARGE** and do the following:
 - a. In the **Service Description** dropdown list, select an item.
 - b. In the Service Code dropdown list, select a new code, if necessary.
 - c. Add pointers as needed.
- 5. Enter information in the remaining fields as necessary, and then select **SAVE ALL. Tips**
 - See "Settings in the claim entry screen" and "Keyboard shortcuts for the claim entry screen" in the appendix.
 - Use the sub-tabs to move quickly to different sections of the claim entry screen.

Enter a non-study-related claim

You can enter a claim for charges unrelated to studies, such as for CDs or medical records. Even though this procedure is primarily intended for unrelated charges, you still have the option of associating the charge with a study. For purely study-related claims, see "Enter a claim from an existing study."

- 1. On the burger 🔲 menu, select **BILLING**.
- 2. On the top navigation bar, select **Studies**, and then select **NEW CLAIM**.
- 3. In the **Claim Creation** dialog, search for a patient by name or MRN.
- 4. In the **PATIENT SEARCH RESULTS** list, select a patient, and then do one of the following.
 - To add a study to the claim, select the checkbox of the study and then select **WITH STUDY**.
 - To create a claim without a study, select **CREATE WITHOUT STUDY**.
- 5. In the **Claim Creation** dialog, on the **CHARGES** sub-tab, select **NEW CHARGE** and do the following:
 - a. In the **Service Description** dropdown list, select an item.
 - b. In the **Service Code** dropdown list, select a new code, if necessary.
 - c. Add pointers as needed.
- 6. Enter the remaining fields as necessary, and then select **SAVE ALL**.

Tips

- See "Settings in the claim entry screen" and "Keyboard shortcuts for the claim entry screen" in the appendix.
- Use the sub-tabs to move quickly to different sections of the claim entry screen.

Enter claims in batches

To make it easier to process large numbers of claims for different patients, you can enter, edit, and validate then in batches.____

- 1. On the burger 🔲 menu, select **BILLING**.
- 2. On the top navigation bar, select **Studies**.
- 3. Select multiple studies and then select **BATCH CLAIM**.
- 4. On the top navigation bar, select **Claims**.
- 5. On the search bar, in the CLAIM STATUS dropdown list, select Pending Validation.
- 6. Claims for all studies that you selected earlier are listed on the screen (along with any other claims in Pending Validation status).
- 7. Open the first claim in the list, edit as needed, and then select **VALIDATE**.
- 8. Select **NEXT**, and then repeat the previous step until all claims in the batch are processed.

Create claims automatically with Auto Billing

With the Auto Billing function you can create auto billing profiles, which are sets of criteria evaluated against study information. When a study matches all criteria in an auto billing profile, Exa PACS/RIS automatically creates a claim for the study. To create an auto billing profile:

Prerequisites:

- Configure items for one or more criteria, such as facilities, modalities, and service codes.
- Your user role must include the Autobilling user right (contact your facility administrator).
 - 1. On the burger 🔜 menu, select **BILLING**.
 - 2. On the top navigation bar, on the **Setup** menu, select **Auto Billing**, and then select **ADD**.
 - 3. In the **Description** box, type a name for the profile.
 - 4. In the **Results in Claim Status** dropdown list, select the status to assign to claims created based on this profile.
 - 5. Under Study Status, Facilities, Ordering Facilities, and other categories, add one or more

criteria as follows.

- Select the Is or Is Not option (for example Is).
- Select a study status in the dropdown list (for example, Tech Start (TS))
 - 6. Select the plus 🛨 button.
 - 7. Select **SAVE**.

Result: In this example, when a study changes to the *Tech Start* status, a claim is automatically created for that study.

About validation

To help prevent fraud, Ontario requires *validation* of health numbers and their version codes (which can change periodically) at two points during the medical scheduling process. The validation status is indicated by the color of the star on a worklist study row. **Red** means "not validated," relice means "validated when scheduled," and **green** means "validated on study date." **Orange** means three conditions are met: no schedule is available, validation is complete, and an affirmative response was received from OHIP.

During validation, if a non-trivial discrepancy is found in patient demographics, Exa PACS/RIS automatically updates its patient chart to match that of OHIP.

Validate an exam or claim

To *validate an exam* means to validate the information on the patient's health card. You must validate an exam after you schedule it, and on the day of the exam. There are several ways to validate an exam, described as follows. For more information, see "About validation."

In the edit study screen

- 1. On the worklist, in a study row, select the edit button to open the edit study screen.
- 2. In the left pane, select **Insurance profile**, and then open a profile.
- 3. Under **Insurance Details**, select a level and an insurance carrier, type the health number, and then select the green **Verify** button.
- 4. To view a report of the eligibility check, select **View Report**.

On the worklist

- 1. On the worklist, select the **PRE ORDERS** or **ALL STUDIES** tab.
- 2. On the order or study shortcut menu, select **Actions** > **Manually Verify Eligibility**.
- 3. If the **Eligibility** worklist column is displayed, confirm that the green checkbox is selected.

On the Claims screen

- 1. On the burger 🔲 menu, select **Billing**.
- 2. On the top navigation bar, select **Claims**, and then select one or more claims.
- 3. On the toolbar, select **VALIDATE**.

See also:

About validation

Add a claim to the follow-up queue

If you know that a claim will need further attention in the future, you can add it to the follow-up queue. To view the follow-up queue, in the upper left of the CLAIMS page, select the FOLLOW-UP QUEUE tab.

- 1. On the burger **menu**, select **BILLING**.
- 2. On the top navigation bar, select **Claims**.
- 3. In the list of claims, right-click a claim and then select **Add Follow-up**.
- 4. In the **Add Follow-up** dialog, enter a follow-up date.
- 5. Optional. If the user name list appears, select the person to whom to assign the follow-up.

6. Select **SAVE.**

Make quick changes to claims

You can make quick changes to claims without opening them for editing.

- 1. On the burger 🔲 menu, select **BILLING**.
- 2. On the top navigation bar, select **Claims**.
- In the list of claims, right-click one (only) claim and then select one of the following.
 Change Billing Status In the sub-menu, select a new status.
 Change Billing Code In the sub-menu, select a new billing code.
 Change Billing Class In the sub-menu, select a new billing class.
 Change Billing Payer Type In the sub-menu, select a new payer type.

Split a claim

If a claim has more than one charge, you can split the claim by moving some of the charges to a new claim for the same patient.

- 1. On the burger 🔲 menu, select **BILLING**.
- 2. On the top navigation bar, select **Claims**.
- 3. In the list of claims, right-click a claim and select **Split Claim**.
- 4. In the **Create/Split** dialog, find a charge that you want to move to the new claim, and select its plus (+) sign.
- 5. Select **SAVE.**

The new claim is added to the **CLAIMS** page.

Submitting claims

About exchanging files with OHIP

Exa PACS/RIS automatically gathers all pending claims submissions, creates a batch file, and sends the file to OHIP. It also receives acknowledgement, payment, and error files from OHIP. These sent and received files appear in the Files tab, where you can view them and use them to apply payments.

Submit a claim manually

You can submit one or more claims of the same billing method.

- 1. On the burger 🔲 menu, select **BILLING**.
- 2. On the top navigation bar, select **Claims**.
- 3. On the search bar, in the **Billing Method** column dropdown list, select a billing method (for example "Paper Claim").
- 4. In the list of claims, select one or more claims, select **VALIDATE**, and then resolve any issues.
- In the upper-right corner of the screen, select the billing method selection button, select the same billing method that you selected previously (e.g. Paper Claim), and then select the button (e.g. select PAPER CLAIM (B&W)).
- 6. In the dialog do one of the following.
- Electronic claims In the EDI Claims dialog, select Download, and then upload the edi.txt file the clearinghouse.
- Other claims and invoices Download or print the invoice.

Other claim-related tasks

View and edit the patient chart in Billing

You can open and edit the Exa PACS/RIS patient chart from within Billing.

- 1. On the burger 🔜 menu, select **BILLING**.
- 2. On the top navigation bar, select Claims, and double-click a claim.
- 3. At the top of the screen, select the **Patient Chart** link. **Result**: The Patient Information tab of the patient chart opens.
- 4. Optional. Edit patient information and select **SAVE PATIENT**.

View patient alerts in Billing

You can view patient alerts from the Studies screen. To view patient alerts from the edit study screen, see, "View patient alerts."

- 1. On the burger 🔜 menu, select **BILLING**.
- 2. On the top navigation bar, select **Studies**, and then open a study.
- 3. At the top of the **Claim Creation** dialog, select **Alerts**.

View and enter notes and reasons for study

You can view previously entered patient, study, schedule, and reason for study notes, and enter new ones.

- 1. On the burger 🔜 menu, select **BILLING**.
- 2. On the top navigation bar, select **Studies** or **Claims**.
- 3. Double-click a study or claim in the list
- 4. In the **Claim Creation** or **Edit** screen, select **Notes**.
- 5. In the **Notes** dialog, select a tab, and the do one of the following.
- To enter a new note, select **ADD**, type the note, and then select **SAVE**.
- To find an existing note, enter criteria in the search bar.
- To edit an existing note, double-click it in the list.

View and download a patient document

You can download any patient documents that are available in Exa PACS/RIS.

- 1. On the burger Honor, select **BILLING**.
- 2. On the top navigation bar, select **Claims**.
- 3. In the list of claims, right-click a claim and then select **View Documents**.
- 4. Optional. In the **Patient Documents** dialog, narrow the list of documents by entering properties in the search bar.
- 5. Double-click a document in the list.
- 6. In the second **Patient Documents** dialog, in the right pane, select the link of the document to download.

Result: Exa Billing downloads the documents to the Windows Downloads folder.

Upload a new patient document

You can upload and attach a new document to the patient chart. You can upload files of the following formats: TXT, PDF, and JPG.

- 1. On the burger Hennu, select **BILLING**.
- 2. On the top navigation bar, select **Claims**.
- 3. In the list of claims, right-click a claim and then select **View Documents**.
- 4. In the **Patient Documents** dialog, select **UPLOAD**.
- 5. In the second **Patient Document** dialog, enter the required metadata and then select **SELECT FILES**.

- Navigate to the file to upload, and then select **Open**.
 Note: Exa Billing renames the file with a UID, and displays its icon in the right pane.
- 7. Select **SAVE.**

View patient reports

You can view all available reports associated with a patient.

- 1. On the burger \blacksquare menu, select **BILLING**.
- 2. On the top navigation bar, select **Claims**.
- 3. In the list of claims, right-click a claim and select **View Reports**.
- 4. In the **Approved Reports** dialog, double-click a report to open it.

View the patient claim log

You can view a log of <u>patient claim activity</u>.

- 1. On the burger 🔲 menu, select **BILLING**.
- 2. On the top navigation bar, select **Claims**.
- 3. In the list of claims, right-click a claim and select **Patient Claim Log**.

Send claims to collections

You can prepare a report to review all claims that are in "collections review" status. You can generate this report for the collection agency, change the claim statuses to "claim in collections," and adjust off the claim balances.

- 1. the burger 🔜 menu, select **BILLING**.
- 2. On the **Report** menu, select **Collections**.
- 3. Select filtering criteria in the Claim Date, Facilities, and Billing Provider lists.
- 4. Optional. To send the report to the collections agency, select the **Send claims to collections** checkbox.
- 5. To generate the report, select a report format button (such as **PDF** or **EXCEL**).

Open an insurance provider's website from a claim

When browsing claims, you can open the website of a claim's insurance provider directly from a claim. **Prerequisite**: Configure the URL of the website for the insurance provider (see "Add an insurance provider").

- 1. On the burger 🔜 menu, select **BILLING**.
- 2. On the top navigation bar, select **Claims**, and then select **ALL CLAIMS**.
- 3. On the shortcut menu of a claim, select **Change Billing Payer Type**, hover over a payer type, and then select the URL.

Manage payments

Find and view payments

You can find and view existing payment information for reference or editing.

- 1. On the burger 🔲 menu, select **BILLING**.
- 2. On the top navigation bar, select **Payments**.
- 3. To filter the list of payments, in the search bar, do one or more of the following.
 - Type or select one or more criteria and then select **Enter**.
 - Select a column header to sort the list of claims.
 - In the upper-left part of the screen, select the **Payment Status** button and then select one or more payment status filters.

Note: For tips on searching, see "Search syntax."

4. Double-click a payment in the list to open it for viewing or editing.

Add a new payment

You can add a new payment based on an EOB or an invoice. "Adding" a payment records the bulk payment in the system, but does not apply the payment to claims and charges. To apply such added payments, see the "Apply payments" topics.

NOTE: Payments from <u>Alberta</u> Health are automatically applied to claims. You do not need to add them.

- 1. On the burger 🔲 menu, select **BILLING**.
- 2. On the top navigation bar, select **Payments**.
- 3. At the top of the list of payments, select **ADD**.
- 4. In the **PAYMENTS** screen, enter the payment details and then select **SAVE**.
- 5. Optional. New buttons appear in the middle of the screen that you can use as follows.
- To enter a new payment, select **ADD**.
- To print a record of the payment, select **PRINT**.
- To delete the current payment, select **DELETE**.

Step through claims to add payments

You can step through claims and add payment information.

- 1. On the burger Hennu, select **BILLING**.
- 2. On the top navigation bar, select **Claims**, and open a claim.
- 3. At the bottom of the **PAYMENTS** sub-tab, select **NEW PAYMENT**.
- 4. Enter payment information, select APPLY, and then enter payment details.
- 5. Optional. To print a statement related to the claim, select the **Print Statement** button shortcut menu, and then select a mailing recipient (**Patient**, **Guarantor**, or **Ordering Facility**).
- 6. Select **SAVE**.
- 7. Select **PREV/NEXT** to step through claims and add payments.

Apply payments against a list of unpaid claims

You can apply payments to an automatically generated list of unpaid claims for the payer.

- 1. On the burger 🔲 menu, select **BILLING**.
- 2. On the top navigation bar, select **Payments**.
- 3. In the list of payments, open a payment.
- 4. In the bottom pane, select the **PENDING PAYMENTS** tab.
- 5. Optional. Sort or filter the list with search criteria.
- 6. In the list of payments, double-click the payment to apply.
- 7. In the dialog, edit payment information as needed and then select **PAY IN FULL**.
- 8. Exa Billing applies payment to the line items in the list in order, until the payment balance is 0.
- 9. Select SAVE.

Apply payments against a customized list of claims

You can apply payments to a list of claims that you can customize first by patient, and then by other criteria.

- 1. On the burger 🔲 menu, select **BILLING**.
- 2. On the top navigation bar, select **Payments**.
- 3. In the list of payments, double-click a payment.
- 4. In the bottom pane, select the **PENDING PAYMENTS (BY PATIENT / CLAIM / INVOICE)** tab.
- 5. Use the search tools to find a patient, and then double-click a patient in the list.
- 6. In the dialog, edit payment information as needed and then select **PAY IN FULL**.
- 7. Exa Billing applies payment to the line items in the list, in order, until the payment balance is 0.

8. Select **SAVE ALL**.

Apply payments in the Files tab

The Files tab lists files that are sent to or received from OHIP. If you receive a file from OHIP for an unapplied payment, you can apply the payment directly from the payment file.

- 1. On the burger 🔲 menu, select **Billing**.
- 2. On the top navigation bar, select **Claims**.
- 3. On the **Files** tab, select the **Apply** button of the payment file.

Pay a claim in full

You can automatically apply a payment to adjust a claim to be paid in full.

- 1. On the burger 🔲 menu, select **BILLING**.
- 2. On the top navigation bar, select **Claims**.
- 3. On the shortcut menu of the claim to pay, select Adjust to Paid in Full.
- 4. In the **Adjust to Paid in Full** dialog, in the **Adjustment Codes** dropdown list, select an adjustment code.
- 5. Select **SAVE**.

Look up and edit applied payments

You can look up applied payments for reference, and edit them if necessary.

- 1. On the burger 🔲 menu, select **BILLING**.
- 2. On the top navigation bar, select **Payments**.
- 3. In the list of payments, double-click a payment.
- 4. In the bottom pane, select the **APPLIED PAYMENTS** tab.
- 5. Edit the payment information and then select **SAVE.**

Export the payments list

You can export the contents of the currently displayed payments list to a CSV or PDF file.

- 1. On the burger Honny, select **BILLING**.
- 2. On the top navigation bar, select **Payments**.
- 3. Filter the list of payments as needed.
- 4. Do one of the following.
- To download a CSV file, select **EXPORT**.
- Exa Billing downloads the list to your Windows Downloads folder.
- To download a PDF file, select GENERATE PDF, and then download the PDF from the preview window.

Apply TOS payments

You can automatically apply TOS payments to claims having the same date. If the claim has more than one charge, the payment is evenly distributed among the charges.

- 1. On the burger Hennu, select **BILLING**.
- 2. On the top navigation bar, select **Payments**.
- 3. On the **Payments** screen, select the **Payment Status** button (ALL SELECTED) and then select **Unapplied**.
- 4. On the search bar, select:
- A payer type of Patient
- An accounting date range
 - 5. Select **APPLY TOS PAYMENT**.

Write off a small balance

If the patient's total account balance falls below a specified amount, you can automatically write them off (adjust them to zero).

- 1. On the burger 🔲 menu, select **BILLING**.
- 2. On the top navigation bar, select **Payments**.
- 3. On the **Payments** screen, select **SMALL BALANCE ADJUSTMENT**.
- 4. In the **Small Balance Adjustment** dialog, type the total patient account balance at or below which Exa PACS/RIS should write off that balance, and then select **NEXT**.
- 5. Confirm the contents of the results list, and then select **COMPLETE**.

Work with reports

Create, view, and deliver reports

Create a billing report

You can create various types of reports based on configurable criteria, and then export them in formats including PDF, XLS, CSV, and XML.

- 1. On the burger 🔲 menu, select **BILLING**.
- 2. On the top navigation bar, select **Report**, and then select a report type in the list. Enter criteria in the fields provided, and then do one of the following.
- To preview the report, select VIEW.
- To export the report, select the button corresponding to the file format.

View your saved reports

You can view open and download reports that you previously saved.

- 1. On the burger menu, select the arrow next to **REPORTS**, and then select **MY REPORTS**.
- 2. Select a report in the list, and then:
- Select sto download
- Select
 to open

Deliver reports

You can follow a special workflow in Exa PACS/RIS to deliver reports. This workflow includes sending images to referring physicians to help them understand the reports.

- 1. On the burger 🔜 menu, select **SETUP**.
- 2. Next to the burger button, select the word in all caps, and then select **Providers & Resources**.
- 3. On the **RESOURCE** tab, in the **RESOURCE TYPE** column, select **REFERRING PROVIDER**.
- 4. Double-click one of the providers in the list, and in the bottom of the screen, select the **LOCATIONS/CONTACTS** tab.
- 5. Double-click a contact in the list. In the **Contact Information** area, in the **Email** box, type the email address of the provider contact.
- 6. In the **Reports to Me** area:
 - a. Select the Email Report Link and Email Attachment checkboxes
 - b. In the **Report Password** box, type a password.
 - c. Under **Reports to Group**, select the **Email Report Link** and **Email Attachment** checkboxes.
- 7. Back in the Contact Information area, select SAVE CONTACT, and then select SAVE & CLOSE.
- 8. In the worklist, select the edit \checkmark button of a study.
- 9. In the edit study screen, in the left pane, select **EXAM INFORMATION**.
- 10. In the **Ordering Physician** dropdown list, on the **ORDER** sub-tab, select a referring physician and then select **SAVE**.

Note: You can view your sent reports at: Burger menu > SETUP > General > REPORT QUEUE. Records are processed and sent to the specified user or group based on the email service configuration.

Same User Same Patient Last Name Search Audit

You must have a specific user right to generate this report. This report contains:

- The name and username of users who accessed the records of patients with the same last names as the users, within a specified date range.
- The date and time of access, the patient name, and the ULI whose record was accessed.
- To generate the report:
 - 1. On the burger imenu, select **Reports** > **Operations** > **Same Last Name User Audit**.
 - 2. Select a date range and one or more facilities.
 - 3. Optional. Enter a username, or leave blank to search all users.
 - 4. Select **CSV** to generate the report.

Frequently Accessed Record Audit

This report contains:

- The name and ID of users who accessed the same patient records more than 5 times within a specified period
- The ULI and name of the patients whose records they accessed
- The number of times the records were accessed

To generate the report:

1. In the browser's URL box, type the following parameters at the end of the Exa PACS/RIS URL. You can modify the values in blue as needed.

/getFrequentlyAccessedPatientRecords?begin_date=2020-07-21&end_date=2020-09-21&threshold=3&username=bbaker98

Lack of Use Audit

This report contains a list of users in Exa PACS/RIS who were inactive in the Alberta EHR within a specified period. To generate the report:

1. In the browser's URL box, type the following parameters at the end of the Exa PACS/RIS URL. You can modify the values in blue as needed.

/getLackOfUseAudit?begin_date=2020-08-21&end_date=2020-09-21&threshold=0

Create and deliver the patient statement

If patients are in facilities such as nursing homes or hospice, and you send bills to their guarantor or a third party payer, you can change the mailing address when printing the patient statement.

- 1. On the burger 🔜 menu, select **BILLING**.
- 2. On the top navigation bar, select **Report**, and then select **Patient Statement** in the list.
- Select criteria for the report.
 Note: In the US, some information such as the address is excluded from the patient statement if the patient is a minor.
- 4. In the **Statement Mode** button shortcut menu, select **select**.
- 5. In the Mail To button shortcut menu, select a recipient.
- 6. Click a format button to generate the report (PDF, EXCEL, CSV, or XML).


Work with Exa Chat

What is Exa Chat?

Exa Chat is a program within Exa PACS/RIS that enables you to securely *chat* (exchange text messages) with other members of your institution. You can hold private chats (instant messaging), or group chats with individuals or departments. You must purchase a license to use Exa Chat.

What is the contact list?

The contact list is contained in the main Exa Chat window that appears in the lower left of the Exa PACS/RIS browser window, and lists chat rooms in which you participated. You can select any room to re-open it. When a user archives a room, it is removed from the contact list.



About group (multi-user) chat rooms

Group and *ad hoc* are both types of multi-user chat room. Group chat rooms are managed, and ad hoc chat rooms are not. If you start a private chat and then add a third member, the chat room becomes an ad hoc chat room. The following table summarizes other differences.

Property	Group	Ad hoc
Who can create the room?	The "manager" (user with Group Chats Management rights).	Any user with Personal Chat Allowed rights.
Who can/remove add members?	The manager. No special user rights are required to be added.	Any member can add anyone else with Personal Chat Allowed user rights.
Who can delete/archive the room?	The manager.	Only the last remaining member.

Use Exa Chat

Start a new private chat

To start chatting with someone for the first time, you can create a private chat room. After creating a private chat room, it appears in the contact list for future use.

- 1. On the contact list, select the add 🖬 button.
- 2. In the **Add room** dialog, begin typing a contact name, and then select the name from the list. The private chat room window appears to the left of the contacts list.
- 3. In the box at the bottom of the chat room window, type a message and select **Enter**.

Join a group chat room

You can join a group chat room that was configured in Exa PACS/RIS. See "Add a group chat room."

- 1. On the contact list, select the add 🖬 button.
- 2. In the **Add private room** dialog, start typing the name of the group room, and then select the name from the list. The group chat room window appears to the left of the contacts list.
- 3. In the box at the bottom of the chat room window, type a message and select **Enter**.

Start a new multi-user chat

To start a group chat, you create a multi-user chat room. After creating the room, it appears in the contact list for future use.

- 1. On the contact list, select the add 🚺 button.
- 2. In the Add Room dialog, select CREATE ROOM.
- 3. In the **Create new room** dialog, type a title for the room, and then select **CREATE NEW ROOM**.
- 4. The multi-user chat room window appears to the left of the contacts list.
- 5. In the box at the bottom of the chat room window, type a message and select **Enter**.
- 6. The message is sent to all members in the chat room.

Minimize or restore chat rooms

- To minimize a chat room, select its minimize 🔛 button.
- To minimize Exa Chat (all chat rooms and the contact list), select the minimize button on the contact list.
- To restore a single chat room or all chat rooms, select the maximize button at the bottom of the browser window.

Open a previously used chat room

Each entry in the contact list corresponds to a chat room in which you participated. Select any room in the list to re-open it and re-initiate a chat.

Add a member to a chat room

You can add a new member to an existing chat room. You can also add a group chat room as a "member" of another chat room.

- 1. On the header of a chat room, select the settings 🙆 button.
- 2. Select Add users or Groups.
- 3. In the **Add user** dialog, begin typing a contact name, or a group chat room name, and then select the name from the list.
- 4. Select OK.

Change your status

Your status indicates your availability to chat. You can set a status of Busy (available for emergencies) and DND (do not disturb, do not play sounds). Unless you assign a status manually, Exa Chat automatically assigns a status of Online (available) or Offline (unavailable).

1. On the header of the contact list, select the status button.



2. Select a status.

Add a chat room to your favorites

When you add a chat room to your favorites, it moves to the top of the contact list.

- 1. Open the chat room that you want to add.
- 2. In the chat room window header, select the Add to favorites 🔤 button.

Add an avatar

An avatar is an image such as a photo that represents you in various parts of the program. **Prerequisites**: Prepare a PNG image to use as the avatar.

- 1. At the top of the burger 🗐 menu, select the blue Konica Minolta 🌅 globe.
- 2. In the **My Profile** dialog, select **Choose File**.
- 3. Browse for and select your avatar image, and then select **Open**.
- 4. Select **SAVE**.

Copy from one message to another

You can copy all or part of a message into another message.

- Select all or some text in one message, select Ctrl+C, and then paste into another message.
- Drag a message from one chat window into the message box of another chat window.

Manage Exa Chat

Add user roles for Exa Chat

Administrators must add user roles for Exa Chat.

- 1. On the burger 🔜 menu, select **SETUP**.
- 1. Next to the burger button, select the word in all caps, and then select User Management.
- 2. On the USER ROLES tab, select ADD.
- 3. Type a name for the role (such as Chat), and a description, and then select SAVE.
- 4. On the **USER ROLES** tab, double-click the user role you just added.
- Select one or more of the following checkboxes.
 Personal Chat Allowed Create and join private and ad hoc chat rooms.
 Group Chats Management Create and join private and multi-user chat rooms.
 Chat Apply both of the previous rights.
- 6. Select SAVE.

See also:

Manage users

Rename a chat window

You can change the name of an existing chat room.

- 1. Select Settings 🔯 in the chat room that you want to rename.
- 2. Type the new title in the box, and then select **SAVE TITLE**.

Archive a chat

To save disk storage space, you can archive your chats. Archiving saves messages older than a preconfigured date to a CSV file, and then removes them from the system. Archiving only works if the system holds more than a pre-<u>configured</u> number of messages.

- 1. Select Settings in the chat room that you want to archive.
- 2. Select **Archive the chat**.


Use Exa Links

What are Exa Links?

Exa Links are links to Exa PACS/RIS controls that you send to chat members. Recipients can select the Exa Links to open patient charts, studies in the edit study screen or viewer, approved reports, notes, and other assets.

Find and send an Exa Link

If you hover over a control in Exa PACS/RIS and its tooltip ends with " \cdots - Share to Chat," it is an Exa Link.



The following table lists the controls that are available as Exa Links at the time of this writing. More will be added in future versions.

Page	Controls	
Worklist	Study toolbar: Viewer, Edit, Approved Reports	+ □ ■ ● ● ∕ □ ◘ □ ☆ ④ :

To send an Exa Link, drag it onto the message box at the bottom of a chat room window, and then select **Enter**.

Send a document by using an Exa Link

In addition to the Exa Links on the worklist, you can send Exa Links to documents from the Patient Documents screen.

- 1. On a worklist shortcut menu, select Attached Files.
- 2. In the **Patient Document** dialog, double-click a document to open it.
- 3. Drag the **Share to Chat** button into a chat message.

Work with tools

Exa PACS/RIS includes a suite of tools that provide a variety of functionality. Some tools must be installed locally on the client computer (see "Install and configure tools" in the appendix).

Use import tools

Import studies from CD

You can perform a "CD import."



Ensure that the data to be imported, and the data after import are correct.

Prerequisite: Install OPAL tools (see the appendix).

- 1. On the burger Honor, select the arrow next to **TOOLS**, and then select **CD IMPORT**.
- 2. If the "Open Opal Import?" message appears, select the checkbox, and then select **Open Opal Import**.
- 3. In the **OpalImport** dialog, select **Select Files/Folders or DICOMDIR to Import**, and then browse for and select files to import.
- 4. Enter customization settings and then select **Import**.

Import studies to a specific AE (API mode)

You can import studies to a specific AE.

- On the worklist, on the PACS Actions menu, select Import Images.
 Note: If the "Open Opal Import?" message appears, select the checkbox, and then select Open Opal Import.
- In the OpalImport dialog, turn on API mode by typing 1q2w3e4r5t.
 Note: You only need to perform this step once. API mode will remain on permanently.
- 3. Select the **Exa API transfer** option.
- 4. Select **Select Files/Folders or DICOMDIR to Import**, and then browse for and select files to import.
- 5. Enter customization settings and then select **Import**.

Work with Patient Portal

Patient Portal is a website that patients can use to view or modify information about their past and future exams, demographics, insurance, guarantors, and representatives, and to schedule appointments.

About creating a patient account

Create a patient account

To create a new patient portal account:

As clinical staff

- 1. Provide the patient portal URL to the patient. You can contact the patient directly, or add the URL to the appointment confirmation screen or automated appointment reminders.
- 2. In the patient's chart, select **CREATE PORTAL ACCOUNT**.
- Enter information as needed, and then select CREATE.
 Result: Exa PACS/RIS sends an email to the patient with a link they can use to set their password.
- 3. Click SAVE.

As the patient

- 1. On the patient portal sign-in screen, select **NEW USER**.
- 2. In the New User Registration dialog, fill out the form, and then select Save.
- 3. Open the email from your healthcare facility, and then select the verification link to verify your email address.

Link the portal account to a patient chart

When a patient initiates creating their own Patient Portal account, the demographics the enter are sent to Exa PACS/RIS. You must reconcile that information to the patient's existing chart, or use it to create a new chart.


- 1. On the burger 🔜 menu, select **PORTAL REG USERS**.
- 2. On the **Portal Registered Users** screen, open a user of Verified status.
- 3. In the **Portal Registered Information** screen, in the **Patient Match** area, search for a matching patient. If no matching patients appear, select **CREATE NEW**, edit the patient's information as needed, and then select **CREATE PATIENT**.
- 4. Open the matching patient, and check the **Registration Information** pane on the right; if any information appears in yellow, decide whether you want to update the patient chart with the new information.
- 5. Do one of the following:
- To update the patient chart and link the account, select SAVE AND LINK, and then select UPDATE.
- To continue linking the account without updating the patient chart, select **SAVE AND LINK**, and then select **CONTINUE WITHOUT UPDATING**.
- To reject the registration request altogether, select **REJECT**.

Use the patient portal

Only patients and authorized representatives can use the patient portal, but you can refer to these instructions to assist patients.

Sign in to the patient portal

1. Go to the URL given to you by your healthcare provider.



- 2. In the **Login** pane, in the first box, type your email address.
- 3. In the second box, type your password.
- 4. Select the **I Agree to the HIPAA Privacy Notice** link to open the notice, and then read it.
- 5. If you agree, select the **I Agree to the HIPAA Privacy Notice** checkbox.
- 6. Optional. To automatically fill in your email address whenever you go to the sign-in page, select the **Remember Me** checkbox.
- 7. Select LOGIN.

I forgot my password

If you forget your password, you can reset it from the sign-in page.

- 1. On the sign-in page, on the right pane, select **FORGOT PASSWORD**.
- 2. In the Forgot Password box, type your email address and select SUBMIT.
- 3. Open the email sent to the address you entered, and use the link to reset your password.

Go to the Home screen

• In the left pane, select **Home**.

Find a location

You can search for a healthcare facility near you on a map.

- 1. In the left pane, select **Our Locations**.
- 2. In the list of locations, select a location to show it on the map.

View appointments and appointment confirmations

You c an view information about your past and future appointments, and view and print the appointment confirmation card.

- 1. On the home screen, select the **Future Appointments** or **Past Appointments** tab. Each appointment appears in a row.
- 2. To open the appointment confirmation card, on the left side of an appointment row, select the appointment card is button.
- 3. To print the appointment confirmation card, open the confirmation card, and then select **Print**.

Upload a document

You can send us documents such as scans of your insurance card, forms, and reports from prior exams by uploading them in the patient portal.

- 1. On the home screen, select the Future Appointments or Past Appointments tab.
- 2. Find the row containing the appointment that pertains to your document.
- 3. On the right side of the row, select the upload $\widehat{\mathbb{H}}$ button.
- 4. In screen that appears, enter any of the following that may be helpful to manage the document:
- **Document Type** Select the type of document to upload.
- **Document Notes** Type a description, or other notes, if needed.
- Created By Type the originator of the document (such as a doctor, or yourself).
- Import/Upload Date Type the current date.
- 5. Select Upload.

View your appointments in a calendar

You can open a calendar view of your appointments.

• On the home screen, select the Calendar 🙆 button.

Request an appointment

You can request an appointment for specific study on a specific date at a selected location. If you do not know this information, leave the fields blank (this does not affect how quickly your appointment will be scheduled).

- 1. On the home screen, select the menu \blacksquare button.
- 2. Select the Schedule 🛱 button.
- 3. On the **Appointments** tab, select **Add**.
- 4. Under **Add Information**, enter the following settings.

Setting	Description		
Location	Select y	Select your first choice of healthcare facility for the appointment.	
Modality	Select t	Select the type of imaging to receive from one of the following.	
	AT		
	BD	Bone density	
	BR		
	вто	Breast tomography	
	CR	Computed radiography	
	СТ	CT (computed tomography)	
	DG	Diaphanography	
	DX	Digital radiography	
	MG	Mammogram	
	MGK		
	MR	MRI (magnetic resonance imaging)	
	NM	Nuclear medicine	
	ОТ	Other	
	РТ	PET (positron emission tomography)	
	RF	Radio fluoscopy	
	RT	Record of treatment	
	SC	Secondary capture	
	SP	Stereo-photogrammetry	
	ТМ		
	US	Ultrasound	
	ХА	X-ray angiography	
Referred By	Select your first choice of date for the appointment.		
Requesting Date	Select y	our first choice of date for the appointment.	

Setting	Description
Schedule Notes	Type any special instructions or notes to the healthcare provider.
Appointment Type	The appointment type corresponding to the selected modality, if available. Filled in automatically.
As Soon as Possible	If the appointment is urgent, select this checkbox.

5. Click **Save**.

Result: The appointment request is sent.

Update insurance information

If your insurance policy changes, you can update it.

- 1. On the home screen, select the menu 🗰 button.
- 2. Select the Insurance 0 button.
- 3. On the **Insurance** tab, find the policy you want to update, and on the right, select its edit button.
- 4. Edit the information as needed, and then select **Save**.

Add an insurance policy

If you obtain new a insurance policy, you can add it.

- 1. On the home screen, select the menu 🗰 button.
- 2. Select the Insurance 0 button.
- 3. On the **Insurance** tab, select **Add**.
- Enter all relevant information.
 Note: If this is your only policy, in the Level list, select Primary. Otherwise, select Secondary for your second policy, or Tertiary for your third policy.
- 5. Select Save.

Add a guarantor

A guarantor is a person who accepts financial responsibility to pay the medical bill for the patient. To designate a guarantor:

- 1. On the home screen, select the menu 🗰 button.
- 2. Select the Guarantor $\stackrel{\frown}{2}$ button.
- 3. On the **Guarantors** tab, select **Add**.
- 4. Enter information about the guarantor, and then select **Save**. **Note**: Fields with an asterisk (*) are required.

Update my profile

If your personal information changes, you can edit it.

- 1. On the home screen, select the menu 🗰 button.
- 2. Select the Edit My Profile 🗳 button.
- 3. On the **Credentials** tab, edit information as needed, and then select **Save**.

Reset my password

For security and protection of your personal health information, periodically reset your password.

- 1. On the home screen, select the menu 🗰 button.
- 2. Select the Edit My Profile 🏶 button.
- 3. On the **My Account** tab, select **Reset Password**.
- 4. Type your current and new password (twice), and then select **Save**.

Add an email address

To add a new email address to your account:

- 1. On the home screen, select the menu 🗰 button.
- 2. Select the Edit My Profile 🗳 button.
- 3. On the **My Account** tab, in the **Secondary Email** box, type an email address, and then select the plus \bigcirc sign.

Result: An verification email is sent to the address you entered.

4. Use the link in the verification email to verify your new address.

View account activity

To see a history of activity on your account:

- 1. On the home screen, select the menu 🗰 button.
- 2. Select the Activity Log 🔤 button.
- 3. Optional. To search for a specific log entry, select **Search**, and then:
 - a. Select a search key (Logged Date, Screen Name, Email Address, or Log Description).
 - b. Type a value to search for (for example, 01/31/2021).
 - c. Select Search.

View authorized representatives

An authorized representative is a person you authorize to use your patient portal account. To view a list of your authorized representatives:

- 1. On the home screen, select the menu 🛄 button.
- 2. Select the Authorized Representative 🕹 button.

Sign out of the patient portal

When finished using the patient portal, sign out immediately.

• In the upper-right corner of the screen, select the power 😃 button.

Appendix

Reference

User reference

Search syntax

Various lists in Exa PACS/RIS have a search bar with column headers that accept search criteria. The following general rules apply when entering search criteria.

In most numeric fields, you can search for any part of the number. For example:

In the account number field, type:20Exa PACS/RIS finds:203, 1203, and 01203.

In a name field (such as patient name or payer name), you can type the full name in the format:

lastname, firstname …but not… firstname lastname.

In a name field, you can type the first or last name only. For example:

Type: Anderson Exa PACS/RIS finds: Cooper, Anderson ...and... Anderson, John.

In a name field you can type all or part of the first or last name, but using as many letters as possible improves accuracy. For example:

Type: Oswa Exa PACS/RIS finds: Oswald, Trevor ...and... Davis, Oswald However, if you type: Os Exa PACS/RIS finds only: Oswald, Trevor.

Keyboard shortcuts for the claim entry screen

When creating or editing claims, the following keyboard shortcuts are available.

Target	Shortcut
Charges sub-tab	Alt+C
Claims sub-tab	Alt+Shift+C
Insurance sub-tab	Alt+I
Additional Info. sub-tab	Alt+A
Billing Summary sub-tab	Alt+B
Payments sub-tab	Alt+P

Target	Shortcut
Cursor moves to the payer name field	Alt+(+)
Previous claim	Alt+Shift+P
Next claim	Alt+Shift+N
Notes screen	Alt+N
Documents and Reports screen	Alt+D
Validate claim	Alt+V
Save All	Alt+S
Close without saving	Esc

Keyboard shortcuts and commands for Exa Trans

When using Exa Trans, the following keyboard shortcuts are available.

Command	Command Text	Shortcut
Remove last dictated piece	undo that delete that scratch that	-
Next variable placeholder	next variable	Alt+]
Previous variable placeholder	previous variable	Alt+[
Capitalize previous word	capitalize that cap that	-
Remove word left of the cursor	remove left	Ctrl+Alt+Back
Start recording		Ctrl+F1
Toggle recording		Ctrl+F3
Stop recording	stop recording	Ctrl+F2

Merge fields

The following table describes the merge fields available in various parts of the program. Some merge fields may not be available in your installation of Exa PACS/RIS depending on added modules, country, and other factors.

1. **SO** = Study/Order; **IN** = Insurance; **PA** = Patient; **PR** = Provider; **ET** = Email Template; **NT** = Notification Templates, **RT** = Report Templates; **SF** = Study Forms; **CF** = Custom Forms; **TT** = Transcription Templates

Merge Field	Formal Name	Scope ¹
FamilyHealthHistory	Family Health History	SO, NT, SF, CF
FollowUps	Follow Ups	SO, NT, SF, CF
Immunizations	Immunizations	SO, NT, SF, CF
LabResults	Lab Results	SO, NT, SF, CF

Merge Field	Formal Name	Scope ¹
Medications	Medications	SO, NT, SF, CF
Referrals	Referrals	SO, NT, SF, CF
PreLabResults	Pre Lab Results	SO, NT, SF, CF
Problems	Problems	SO, NT, SF, CF
VitalSigns	Vital Signs	SO, NT, SF, CF
Age	Age	PA, ET, NT, SF, CF
AgeatDOS	Age at DOS	PA, ET, NT, SF, CF
Address1	Address 1	PA, ET, NT, SF, CF
Address2	Address 2	PA, ET, NT, SF, CF
Сіу	City	PA, ET, NT, SF, CF
State	State	PA, ET, NT, SF, CF
ZipCode	Zip Code	PA, ET, NT, SF, CF
DOB	DOB	PA, ET, NT, SF, CF
FirstName	First Name	PA, ET, NT, SF, CF
Fullname	Full Name	PA, ET, NT, SF, CF
Gender	Gender	PA, ET, NT, SF, CF
Race	Race	PA, ET, NT, SF, CF
Ethnicity	Ethnicity	PA, ET, NT, SF, CF
HomePhone	Home Phone	PA, ET, NT, SF, CF
MobilePhone	Mobile Phone	PA, ET, NT, SF, CF
WorkPhone	Work Phone	PA, ET, NT, SF, CF
Lastname	Last Name	PA, ET, NT, SF, CF
Middlename	Middle Name	PA, ET, NT, SF, CF
mrn	MRN	PA, ET, NT, SF, CF
uli	ULI	PA, ET, NT, SF, CF
ssn	SSN	PA, ET, NT, SF, CF
Suffix	Suffix	PA, ET, NT, SF, CF
Weight	Weight	PA, ET, NT, SF, CF
Height	Heigh	PA, ET, NT, SF, CF
Employer	Employer	PA, ET, NT, SF, CF
PreferredLanguage	Preferred Language	PA, ET, NT, SF, CF
Username		PA, ET, NT,
Password		PA, ET, NT,
ApprovingPhysicianAddress1	Approving Physician Address 1	PR, ET, NT, SF, CF
ApprovingPhysicianAddress2	Approving Physician Address 2	PR, ET, NT, SF, CF

Merge Field	Formal Name	Scope ¹
ApprovingPhysicianCity	Approving Physician City	PR, ET, NT, SF, CF
ApprovingPhysicianFirstName	Approving Physician First Name	PR, ET, NT, SF, CF
ApprovingPhysicianFullName	Approving Physician Full Name	PR, ET, NT, SF, CF
ApprovingPhysicianLastName	Approving Physician Last Name	PR, ET, NT, SF, CF
ApprovingPhysicianMiddleName	Approving Physician Middle Name	PR, ET, NT, SF, CF
ApprovingPhysicianState	Approving Physician State	PR, ET, NT, SF, CF
ApprovingPhysicianSuffix	Approving Physician Suffix	PR, ET, NT, SF, CF
CCProv1Addr1	CC Provider 1 Address 1	PR, ET, NT, SF, CF
CCProv1Addr2	CC Provider 1 Address 2	PR, ET, NT, SF, CF
CCProv1City	CC Provider 1 City	PR, ET, NT, SF, CF
CCProv1Name	CC Provider 1 Name	PR, ET, NT, SF, CF
CCProv1State	CC Provider 1 State	PR, ET, NT, SF, CF
CCProv1Zip	CC Provider 1 Zip	PR, ET, NT, SF, CF
CCProv1Alerts	CC Provider 1 Alerts	PR, ET, NT, SF, CF
CCProv2Addr1	CC Provider 2 Address 1	PR, ET, NT, SF, CF
CCProv2Addr2	CC Provider 2 Address 2	PR, ET, NT, SF, CF
CCProv2City	CC Provider 2 City	PR, ET, NT, SF, CF
CCProv2Name	CC Provider 2 Name	PR, ET, NT, SF, CF
CCProv2State	CC Provider 2 State	PR, ET, NT, SF, CF
CCProv2Zip	CC Provider 2 Zip	PR, ET, NT, SF, CF
CCProv2Alerts	CC Provider 2 Alerts	PR, ET, NT, SF, CF
CCProv3Addr1	CC Provider 3 Address 1	PR, ET, NT, SF, CF
CCProv3Addr2	CC Provider 3 Address 2	PR, ET, NT, SF, CF
CCProv3City	CC Provider 3 City	PR, ET, NT, SF, CF
CCProv3Name	CC Provider 3 Name	PR, ET, NT, SF, CF
CCProv3State	CC Provider 3 State	PR, ET, NT, SF, CF
CCProv3Zip	CC Provider 3 Zip	PR, ET, NT, SF, CF
CCProv3Alerts	CC Provider 3 Alerts	PR, ET, NT, SF, CF
CCProv4Addr1	CC Provider 4 Address 1	PR, ET, NT, SF, CF
CCProv4Addr2	CC Provider 4 Address 2	PR, ET, NT, SF, CF
CCProv4City	CC Provider 4 City	PR, ET, NT, SF, CF
CCProv4Name	CC Provider 4 Name	PR, ET, NT, SF, CF
CCProv4State	CC Provider 4 State	PR, ET, NT, SF, CF
CCProv4Zip	CC Provider 4 Zip	PR, ET, NT, SF, CF
CCProv4Alerts	CC Provider 4 Alerts	PR, ET, NT, SF, CF

Merge Field	Formal Name	Scope ¹
CCProv5Addr1	CC Provider 5 Address 1	PR, ET, NT, SF, CF
CCProv5Addr2	CC Provider 5 Address 2	PR, ET, NT, SF, CF
CCProv5City	CC Provider 5 City	PR, ET, NT, SF, CF
CCProv5Name	CC Provider 5 Name	PR, ET, NT, SF, CF
CCProv5State	CC Provider 5 State	PR, ET, NT, SF, CF
CCProv5Zip	CC Provider 5 Zip	PR, ET, NT, SF, CF
CCProv5Alerts	CC Provider 5 Alerts	PR, ET, NT, SF, CF
ProviderSignature	Provider Signature	PR, ET, NT, SF, CF
ReadingPhysicianAddress1	Reading Physician Address 1	PR, ET, NT, SF, CF
ReadingPhysicianAddress2	Reading Physician Address 2	PR, ET, NT, SF, CF
ReadingPhysicianCity	Reading Physician City	PR, ET, NT, SF, CF
ReadingPhysicianFirstName	Reading Physician First Name	PR, ET, NT, SF, CF
ReadingPhysicianFullName	Reading Physician Full Nae	PR, ET, NT, SF, CF
ReadingPhysicianLastName	Reading Physician Last Name	PR, ET, NT, SF, CF
ReadingPhysicianMiddleName	Reading Physician Middle Name	PR, ET, NT, SF, CF
ReadingPhysicianState	Reading Physician State	PR, ET, NT, SF, CF
ReadingPhysicianSuffix	Reading Physician Suffix	PR, ET, NT, SF, CF
Ref_PhyAddress1	Referring Physician Address 1	PR, ET, NT, SF, CF
Ref_PhyAddress2	Referring Physician Address 2	PR, ET, NT, SF, CF
Ref_PhyCity	Referring Physician City	PR, ET, NT, SF, CF
Ref_PhyFax	Referring Physician Fax	PR, ET, NT, SF, CF
Ref_PhyFirstName	Referring Physician First Name	PR, ET, NT, SF, CF
Ref_PhyFullname	Referring Physician Full Name	PR, ET, NT, SF, CF
Ref_PhyHomePhone	Referring Physisican Home Phone	PR, ET, NT, SF, CF
Ref_PhyLastName	Referring Physician Last Name	PR, ET, NT, SF, CF
Ref_PhyMiddleInitial	Referring Physician Middle Initial	PR, ET, NT, SF, CF
Ref_PhyNameOrderFMLS	Referring Physician Name Order First Middle Last Suffix	PR, ET, NT, SF, CF
Ref_PhyState	Referring Physician State	PR, ET, NT, SF, CF
Ref_PhySuffix	Referring Physician Suffix	PR, ET, NT, SF, CF
Ref_PhyZip	Referring Physician zip	PR, ET, NT, SF, CF
Ref_PhyMobileNo	Referring pHysician Mobile Number	PR, ET, NT, SF, CF
Ref_PhyOfficeNo	Referring Physician Office Number	PR, ET, NT, SF, CF
Ref_PhyAlerts	Referring Physician Alerts	PR, ET, NT, SF, CF

Merge Field	Formal Name	Scope ¹
Report Link	Report Link	PR, ET, NT, SF, CF
SignatureText	Signature Text	PR, ET, NT, SF, CF
PreApprovedSignatureTExt	PreApproved Signature Text	PR, ET, NT, SF, CF
preApprovedProviderSignature	PreApproved Provider Signature	PR, ET, NT, SF, CF
RadiologistFullName	Radiologist Full Name	PR, ET, NT, SF, CF
TechnologistFullName	Technologist Full Name	PR, ET, NT, SF, CF
SignatureBlockText	Signature Block Text	PR, ET, NT, SF, CF
preApprovedSignatureBlockText	PreApproved Signature Block Text	PR, ET, NT, SF, CF
AttorneyFirstName	Attorney First Name	PR, ET, NT, SF, CF
AttorneyFullName	Attorney Full Name	PR, ET, NT, SF, CF
AttorneyLastName	Attorney Last Name	PR, ET, NT, SF, CF
AttorneyMiddleName	Attorney Middle Name	PR, ET, NT, SF, CF
AttorneySuffix	Attorney Suffix	PR, ET, NT, SF, CF
AttorneyAddress1	Attorney Address 1	PR, ET, NT, SF, CF
AttorneyAddress2	Attorney Address 2	PR, ET, NT, SF, CF
AttorneyCity	Attorney City	PR, ET, NT, SF, CF
AttorneyState	Attorney State	PR, ET, NT, SF, CF
AttorneyZip	Attorney Zip	PR, ET, NT, SF, CF
AttorneyPhoneNo	Attorney Phone Number	PR, ET, NT, SF, CF
AttorneyEmail	Attorney Email	PR, ET, NT, SF, CF
AttorneyFaxNo	Attorney Fax Number	PR, ET, NT, SF, CF
AppointmentTypeCode	Appointment Type Code3	SO, RT, ET, NT, SF, CF
AppointmentTypeDescription	Appointment Type Description	SO, RT, ET, NT, SF, CF
ExpectedArrivalTime	Expected Arrival Time	SO, RT, ET, NT, SF, CF
AccessionNo	Accession Number	SO, RT, ET, NT, SF, CF
ApprovedDate	Approved Date	SO, RT, ET, NT, SF, CF
PreApprovedDate	PreApproved Date	SO, RT, ET, NT, SF, CF
TranscribedDate	Transcribed Date	SO, RT, ET, NT, SF, CF
BodyPart	Body Part	SO, RT, ET, NT, SF, CF
Department	Department	SO, RT, ET, NT, SF, CF
DictationDate	Dictation Date	SO, RT, ET, NT, SF, CF
ICDCode	ICD Code	SO, RT, ET, NT, SF, CF
ICDDescripton	ICD Description	SO, RT, ET, NT, SF, CF
StudyICDCode	Study ICD Code	SO, RT, ET, NT, SF, CF
StudyICDDescription	Study ICD Description	SO, RT, ET, NT, SF, CF

Merge Field	Formal Name	Scope ¹
Institution	Institution	SO, RT, ET, NT, SF, CF
Modality	Modality	SO, RT, ET, NT, SF, CF
ModalityRoom	Modality Room	SO, RT, ET, NT, SF, CF
OrderedBy	Ordered By	SO, ET, NT, SF, CF
OrderingFacility	Ordering Facility	SO, ET, NT, SF, CF
Orientation	Orientation	SO, ET, NT, SF, CF
PatientLocation	Patient Location	SO, ET, NT, SF, CF
PlaceOfService	Place of Service	SO, ET, NT, SF, CF
Priority	Priority	SO, ET, NT, SF, CF
ProcedureCode	Procedure Code	SO, ET, NT, SF, CF
ProcedureCodes	Procedure Codes	SO, ET, NT, SF, CF
ProcedureCodestabular	Procedure Codes Tabular	SO, ET, NT, SF, CF
ProcedureName	Procedure Name	SO, ET, NT, SF, CF
ProcedureNames	Procedure Names	SO, ET, NT, SF, CF
ProcedureNamesTabular	Procedure Names Tabular	SO, ET, NT, SF, CF
ReasonForStudy	Reason for Study	SO, ET, NT, SF, CF
RequestingDate	Requesting Date	SO, ET, NT, SF, CF
RoomNo	Room Number	SO, ET, NT, SF, CF
STAT	STAT	SO, ET, NT, SF, CF
StudyDate	Study Date	SO, ET, NT, SF, CF
StudyDescription	Study Description	SO, ET, NT, SF, CF
StudyFlag	Study Flag	SO, ET, NT, SF, CF
StudyReceivedDate	Study Received Date	SO, ET, NT, SF, CF
ТАТ	ТАТ	SO, ET, NT, SF, CF
TranscribingUser	Trascribing User	SO, ET, NT, SF, CF
VehicleName	Vehicle Name	SO, ET, NT, SF, CF
studyUID	Study UID	SO, ET, NT, SF, CF
StudyFormsignature	Study Form Signature	SO, ET, NT, SF, CF
CustomFormSignature	Custom Form Signature	SO, ET, NT, SF, CF
ExamPrepInstructions	Exam Prep Instructions	SO, ET, NT, SF, CF
CPTCode	CPT Code	SO, ET, NT, SF, CF
CPTName	CPT Name	SO, ET, NT, SF, CF
visit_no	Visit Number	SO, ET, NT, SF, CF
CPTCodes	CPT Codes	SO, ET, NT, SF, CF
CPTNames	CPT Names	SO, ET, NT, SF, CF
CPTCodesTabular	CPT Codes Tabular	SO, ET, NT, SF, CF

Merge Field	Formal Name	Scope ¹
CPTNamesTabular	CPT Names Tabular	SO, ET, NT, SF, CF
DateofInjury	Date of Injury	SO, ET, NT, SF, CF
Allergies	Allergies	ET, NT, SF, CF
CompanyName	Company Name	ET, NT, SF, CF
CurrentDate	Current Date	ET, NT, SF, CF
CurrentTime	Current Time	ET, NT, SF, CF
DateAndTime	Date and Time	ET, NT, SF, CF
OfficeAddress1	Office Address 1	ET, NT, SF, CF
OfficeAddress2	Office Address 1	ET, NT, SF, CF
OfficeCity	Office City	ET, NT, SF, CF
FacilityLogo	Facility Logo	ET, NT, SF, CF
FacilityContactNo	Facility Contact Number	ET, NT, SF, CF
OfficeName	Office Name	ET, NT, SF, CF
OfficeState	Office State	ET, NT, SF, CF
Zip	Zip	ET, NT, SF, CF
FormalName	Formal Name	ET, NT, SF, CF
PracticeType	Practive Type	ET, NT, SF, CF
PrimaryInsurance	Primary Insurance	IN, ET, NT, SF, CF
PrimaryAddress	Primary Address	IN, ET, NT, SF, CF
PrimaryCity	Primary City	IN, ET, NT, SF, CF
PrimaryState	Primary State	IN, ET, NT, SF, CF
PrimaryZipCode	Primary Zip Code	IN, ET, NT, SF, CF
PrimaryPhone	Primary Phone	IN, ET, NT, SF, CF
PrimaryFax	Primary Fax	IN, ET, NT, SF, CF
PrimarySubscriber	Primary Subscriber	IN, ET, NT, SF, CF
PrimaryDOB	Primary DOB	IN, ET, NT, SF, CF
PrimaryRelationship	Primary relationship	IN, ET, NT, SF, CF
PrimaryPolicyNo	Primary Policy Number	IN, ET, NT, SF, CF
PrimaryGroupNo	Primary Group number	IN, ET, NT, SF, CF
HealthNumber	Health Number	IN, ET, NT, CF
VersionCode	Version Code	IN, ET, NT, CF
SecondaryInsurance	Secondary Insurance	IN, ET, NT, SF, CF
SecondaryAddress	Secondary Address	IN, ET, NT, SF, CF
SecondaryCity	Secondary City	IN, ET, NT, SF, CF
SecondaryState	Secondary State	IN, ET, NT, SF, CF
SecondaryZipCode	Secondary Zip Code	IN, ET, NT, SF, CF

Merge Field	Formal Name	Scope ¹
SecondaryPhone	Secondary Phone	IN, ET, NT, SF, CF
SecondaryFax	Secondary Fax	IN, ET, NT, SF, CF
Secondarysubscriber	Secondary Subscriber	IN, ET, NT, SF, CF
SecondaryDOB	Secondary DOB	IN, ET, NT, SF, CF
SecondaryRelatoinship	Secondary Relationship	IN, ET, NT, SF, CF
secondaryPolicyNo	Secondary Policy Number	IN, ET, NT, SF, CF
SecondaryGroupNo	Secondary Group Number	IN, ET, NT, SF, CF
FacilityNotes	Facility Notes	NT, SF, RT
FacilityFax	Facility Fax Number	RT, SF, CF, ET, NT
FacilityEmail	Facility Email Address	RT, SF, CF, ET, NT
Ord_PhyAddress1	Ordering Phys. Street Address1	RT, TT, SR, CF, ET, NT, CS
Ord_PhyAddress2	Ordering Phys. Street Address2	RT, TT, SR, CF, ET, NT, CS
Ord_PhyCity	Ordering Phys. City	RT, TT, SR, CF, ET, NT, CS
Ord_PhyFirstName	Ordering Phys. First Name	RT, TT, SR, CF, ET, NT, CS
Ord_PhyFullName	Ordering Phys. Full Name	RT, TT, SR, CF, ET, NT, CS
Ord_PhyLastName	Ordering Phys. Last Name	RT, TT, SR, CF, ET, NT, CS
Ord_PhyMiddleName	Ordering Phys. Middle Name	RT, TT, SR, CF, ET, NT, CS
Ord_PhyState	Ordering Phys. State	RT, TT, SR, CF, ET, NT, CS
Ord_PhySuffix	Ordering Phys. Suffix	RT, TT, SR, CF, ET, NT, CS
Ord_PhyZip	Ordering Phys. Postal Code	RT, TT, SR, CF, ET, NT, CS
Non-ProprietaryName	Non-Proprietary Name	RT, TT, SF, CF
AmountUsed	Amount Used	RT, TT, SF, CF
Route	Route	RT, TT, SF, CF
Supv_PhyAddress1	Supervising phys. Street Adrs. 1	RT, TT, SF, CF, ET, NT, CS
Supv_PhyAddress2	Supervising phys. Street Adrs. 2	RT, TT, SF, CF, ET, NT, CS
Supv_PhyCity	Supervising phys. City	RT, TT, SF, CF, ET, NT, CS
Supv_PhyFirstName	Supervising phys. First Name	RT, TT, SF, CF, ET, NT, CS
Supv_PhyFullName	Supervising phys. Full Name	RT, TT, SF, CF, ET, NT, CS
Supv_PhyLastName	Supervising phys. Last Name	RT, TT, SF, CF, ET, NT, CS
Supv_PhyMiddleName	Supervising phys. Middle Name	RT, TT, SF, CF, ET, NT, CS
Supv_PhyState	Supervising phys. State	RT, TT, SF, CF, ET, NT, CS
Supv_PhySuffix	Supervising phys. Suffix	RT, TT, SF, CF, ET, NT, CS
Supv_PhyZip	Supervising phys. ZIP	RT, TT, SF, CF, ET, NT, CS
Canada only:	Health Card Number	RT, SF, CF, ET, NT

User rights

The following table describes the rights that an administrator can assign to a user role. **Note**: Shaded rows indicate that the right is not currently in use.

Category	Right	Description
Alberta Netcare	Netcare Login	
	Alberta Netcare Log	
Billing/Setup	Billing Codes	Allows creating and editing billing codes
	Billing Class	Allows creating and editing billing classes
	Claim Status	Allows creating and editing claim statuses
	CAS Group Code	Allows creating and editing CAS group codes
	Provider ID Code Qualifier	Allows mapping provider ID code qualifiers to billing providers
	Payment Reason	Allows editing payment reasons such as co-pay, deductible, and payment plan
	CAS Reason Code	Allows creating and editing CAS reason codes
	Status Color Code	Allows adding and editing colors for payment, claim, and billed statuses
	Supporting Text Templates	Allows mapping of preconfigured supporting text to specific service codes.
	Insurance EDI Mapping	Allows insurance mapping, such as billing method and clearinghouse
	Adjustment Codes	Allows adding and editing adjustment codes
	Billing Provider	Allows adding and editing billing providers
	Billing Messages	Allows editing billing messages that print on statements
	Billing Validation	Allows selecting the data fields that are validated during claim validation
	Printer Templates	Allows editing some settings in printer templates such as page margins
	EDI Request Templates	Allows creating and editing EDI request templates.
	Clearing House	Allows entering clearinghouse information
	Autobilling	Allows creating auto-billing profiles for automatic generation of claims
	CollectionsProcess	Allows configuring the automatic claim collections process
Billing	Claims	Allows opening the claims screen
	Edit Claim	Allows opening the edit claim screen

Category	Right	Description
	Claim Inquiry	Allows access to patient claim information
	All Insurances	All insurances
	Coordination of Benefits	Allows coordinating benefits
	Explanation of Benefits	Allows access to billing ERA
	ERA Inbox	Allows opening the ERA inbox
	EOB Claims Process	Allows opening the EOB tab, and uploading and processing electronic payment files
	File Insurance	Allows managing billing claims
	Patient Claim	Allows viewing a patient's claim history within Billing, and makes available the Inquiry buttons on the Patient Information tab in the patient chart and edit study screen
	Patient Report	Allows opening patient reports and documents within Billing
	Payments	Allows viewing and processing payments
	Apply Payments	Allows applying payments to claims
	Refund	Allows processing refunds
	Back to Ready to Validate	Allows changing claim status to Ready to Validate
	Claim Validate	Allows validating claims
	Create/Split Claim	Allows splitting a claim with more than one charge
	Delete Payment	Allows deleting payment records
	Delete Claim	Allows deleting claims
	File Management	Allows opening the file management screen in Canadian versions
	Edit Claim Status	Allows manually changing claim statuses
	Invoice Activity Statement	Allows viewing and printing the activity statement
	Query Claim	Allows querying of claims.
	Adjust to Paid in Full	Adds a shortcut menu command to pay a claim in full.
	Census	Allows viewing the Census screen.

Category	Right	Description
Billing/Report		All rights in this category allow creating the corresponding report
	Aged AR Summary	
	Aged AR Detail	
	Charges	
	Claim Activity	
	Claim Transaction	
	Collections	
	Credit Balance Encounters	
	Diagnosis Count	
	Modality Summary	
	Monthly Recap	
	Patient Statement	
	Payer Mix	
	Payment	
	Claim Inquiry	
	Patients By Insurance	
	Payments by Insurance Company	
	Procedure Analysis by Insurance	
	Procedure Count	
	Reading Provider Fees	
	Referring Provider Count	
	Referring Provider Summary	
	Transaction Summary	
	Patient Activity Statement	
	Payments Realization Rate Analysis	
	Send claims to collections	Allows using automatic collections to change claim statuses to "Claim in Collection," and make other changes.

Category	Right	Description
Billing/Log		
	Billing User Log	Allows viewing the billing user log
	Bulling Audit Log	Allows viewing the billing audit log
Chat		
	Personal Chat Allowed	Allows using Exa Chat to send and receive messages with individual users (private chat)
	Group Chats Management	Allows creating and managing group chat rooms
Dashboard		
	Dashboard	Allows opening the dashboard
Dictation		
	Approve	Allows approving a dictated study report
	Approve (Addendum)	Allows approving an addendum (Edit or Addition) on a dictated study report, and changing a study's status from Approved to Approved- Coded.
	Dictation	Allows creating a dictated addendum (Edit or Addition) on an approved study report
	Dictation (Addendum)	Allows creating a dictated report
	Dictation (Delete)	Allows deleting a dictated report
	Submit For Review	Allows submitting an addendum for review on a dictated report
	Submit For Review (Addendum)	Allows submitting a dictated report for review
	Transcription (Addendum)	Allows creating an addendum by using Web Trans
Dispatching Dashboard	Dispatching Dashboard	Allows users of Mobile RAD to open the dispatching dashboard
General	AE Scripts	Allows managing AE scripts to receive, send, or print studies
	API Users	Allows adding and editing API users and rights
	Application Entities	Allows configuring application entities (AE).
	Assign Study to Users	Allows assigning studies to specific users from the worklist
	Company	Allows editing general settings including those related to: company contact and billing, apps, MRN, AE filters, LDAP, Rcopia, and HL7
	File Stores	Allows selecting folders to store various data (mainly images) on the server

Category	Right	Description
	Notification	Allows adding notifications that appear on the dashboard
	Tasks	Allows entering tasks that appear on the My Tasks gadget of the dashboard
HL7	HL7 Global Config	Allows viewing global HL7 configurations
	HL7 Queue	Allows viewing the HL7 Outbound (Sender) log
	HL7 Receiver Log	Allows viewing the HL7 Inbound (Receiver) log

Category	Right	Description
Home		
	Allow Reset Approved studies	Allows resetting approved studies to Scheduled status
	Allow Reset of Canceled and No Show Studies	Allows resetting studies from Cancelled or No Show status to Scheduled status
	Appointment Confirmation	Allows viewing the Appointment Confirmation screen
	Can Edit Public Filter	Allows editing public filters
	Can Edit Public Template	Allows editing public templates
	Cancel Reasons	Allows cancelling appointments
	CD Burn	Allows burning DICOM images to a CD or external device
	DICOM View	Allows switching between DICOM preview or priors on the worklist
	DICOM Viewer	Allows opening images on the Exa PACS/RIS viewer
	External App Icon	Allows launching third party applications from the worklist
	Image Preview	Allows previewing images on the worklist
	Import Images	Allows importing images by using the PACS Actions menu
	Import Images from Portal	Allows importing images from the provider or attorney portal into Exa PACS/RIS
	Link DICOM Study	Allows linking a DICOM study to another study
	Marketing Rep Dashboard	Allows opening the Marketing Representative dashboard
	Merge Study	Allows merging and splitting DICOM studies and RIS orders
	Technologist	Allows associating a technologist to an order
	Opal Viewer	Allows viewing studies with the Exa PACS/RIS viewer
	Order additional	Allows opening the Additional Information tab within the edit study screen
	Order ICD	Allows adding ICD codes to an order
	Order Referring Provider	Allows opening the Referring Provider tab within the edit study screen
	Order Studies	Allows opening the Exam Information tab within the edit study screen
	QC Delete	Allows deleting DICOM studies within the QC tab
	QC Edit	Allows editing some fields of a DICOM study within the QC tab
	QC Move to Studies	Allows manually moving a DICOM study from the QC tab to the All Studies tab
	QC Reconciliation	Allows manually matching or reconciling a DICOM study to a RIS order

Category	Right	Description
	Worklist Menu	Allows opening the worklist shortcut menu
	Send Fax	Allows sending approved reports and study forms by fax
	Send Studies	Allows sending a DICOM study to another AE from the worklist
	Show Priors	Allows viewing a patients' priors in a separate study filter on the worklist
	Studies	Allows accessing Exa PACS/RIS
	Study Delete	Allows deleting studies from a patient chart
	Study Purge	Allows permanently deleting a study
	Study Edit	Allows opening the edit study screen
	Study Forms	Allows opening the Study Forms tab within the edit study screen
	Change Status	Allows changing the status of a study
Log		
	API Log	Allows viewing the API log, which tracks API activity
	Audit Log	Allows viewing the Audit log, which tracks system-wide activity
	Rcopia Log	Allows viewing the Rcopia log, which shows Rcopia activity
	Eligibility Log	Allows viewing the Eligibility log
	User Log	Allows viewing the User log, which tracks system-wide user activity

Category	Right	Description
Patient		
	Activity Log	Allows viewing the Activity log within the patient chart and edit study screen
	Advanced Search	Allows expanded searching of patients by age, allergies, lab results, problems, sex, medications, vital signs, smoking status, and race/ethnicity
	Allergies	Allows viewing the Allergies tab in the edit study screen, and editing patient allergies
	Allergies (Read only)	Allows viewing the Allergies tab in the edit study screen (only).
	Break the Glass	Allows use of the Break the Glass function to access confidential records.
	Clinical Summary Transmit	Allows creating, viewing, and transmitting the Clinical Visit Summary/CCD file
	Export CCD	Allows encrypting and downloading of patient charts for physician referrals
	Family Health History	Allows completing the Family Health History form for a patient's first-degree relatives
	Film Tracking	Allows check-out and tracking for 'hard' films from the library
	Immunization	Allows viewing patient immunization records
	Immunization (Read Only)	Allows adding and editing patient immunization records
	Lab Orders	Allows adding, submitting, editing, and deleting laboratory tests and results records
	Lab Orders (Read Only)	Allows viewing laboratory tests and results records
	Medications	Allows adding, editing, and deleting prescribed medications, supplements, and OTC products through Rcopia
	Medications (Read Only)	Allows viewing prescribed medications, supplements, and OTC products through Rcopia
	Merge Patients	
	Outside Referrals	Allows importing CCD/CCR files into the patient chart from the referring provider
	Patient Alerts	Allows selecting alerts or adding custom alerts and notes to a patient chart
	Patient Arrival Worklist	Allows viewing the patient arrival worklist when patients use the kiosk to check in
	Patient Clinical Rules	Allows creating clinical support rules
	Patient Documents	Allows uploading and scanning documents to a study or patient
	Patient Encounter	Allows viewing fees associated with CPT codes and associated fees or charges
	Patient Guarantor	Allows adding a guarantor to a patient's insurance

Category	Right	Description
	Patient Information	Allows opening the Patient Information tab in the patient chart and edit study screen
	Patient Insurance	Allows opening the Insurance tab in the patient chart and edit study screen
	Patient Messages	Allows managing the list of messages sent from a patient send from the patient portal
	Patient Prescriptions	Allows submitting prescriptions to a pharmacy, formulary checking, and adding, editing, and deleting prescribed medications through Rcopia
	Patient Prescriptions (Read Only)	Allows viewing of prescribed medications through Rcopia
	Patient Search	Allows searching for patients from the Patient tab in the patient chart
	Patient Studies	Allows opening the Studies tab within the patient chart and edit study screen
	Patient Orders	Allows viewing the Orders tab within the patient chart
	Payment History	Allows opening the Payment History tab in the patient chart
	Pending Follow-ups	Allows viewing follow-up appointments
	Pending Referrals	Allows viewing referrals
	Problems	Allows editing in the Problems tab in the edit study screen (to add and edit diagnosis codes)
	Problems (Read Only)	Allows viewing the Problems tab in the edit study screen
	To Be Reviewed	Allows opening the To Be Reviewed tab in the patient chart.
	Transition of Care	Allows exporting a CCD file and sending it to a referring physician via email
	Vital Sign (read Only)	Allows viewing a patient's vital signs on the edit study screen
	Vital Signs	Allows adding and editing a patient's vital signs on the edit study screen
	Patient Claim Inquiry	Allows viewing patient claim information
	Patient Claim Inquiry (Read Only)	Allows viewing patient claim information
	VIP	Allows designating patients as VIPs
Peer Review		
	Peer Review Allowance	Allows managing automatic peer review assignments
	Peer Review Manual Appointment	Allows manually assigning peer reviews from the worklist

Category	Right	Description
	Peer Review Operational	Allows generating the peer review operational report
Portal Reg Users	Portal Registered Users	Allows viewing the list of patients who registered for a portal account

Category	Right	Description
Reports		All rights in this category allow creating the corresponding report
	My Reports	
	Completed Schedules	
	Date of Service Payment Summary	
	Export Completed Studies	
	Export Peer Review	
	Insurance Balance Aging	
	Marketing Rep Activities	
	Monthly/Daily Study Goals	
	Patients Worksheet	
	Referrals Variance	
	Referring Physician Study Count	
	Report Filter	
	Report Provider	
	Relative Value Units	
	Scheduler Activity	
	Studies Breakdown	
	Studies by Modality	
	Studies by Modality Room	
	Modality Breakdown	

Category	Right	Description
	Transcription Study Count	
	Turnaround Time (TAT) – Calculated	
	Fees by Facility and Modality	
	Fees by Radiologist and Modality	
	Unfinished Studies	
	Unsigned Orders	
	STAT Tracking	
	Insurance vs LOP	
	Marketing Report Export	
	Technologist Productivity	
	Audit Trial	

Category	Right	Description
Schedule	Add Study	Allows creating new studies, such as in the Edit Study screen.
	Allow Double Booking	Allows double-booking an appointment if available for the facility
	Allow to edit Accession	Allows editing study accession numbers
	Approved Report	Allows viewing approved radiology reports
	Assign Vehicle	Allows assigning a vehicle to a study for Mobile Rad
	Available Slots	Allows using the Find/Available Slots screens
	Billing	Allows viewing information from the edit study screen
	Charge and Payments	Allows opening the Charges and Payments tab within the edit study screen
	TOS Payments	Allows opening the Payments area of the program
	Patient Payment History	Allows viewing patient payment history and printing payment receipts
	Chief Complaints	Allows adding and editing chief complaints in the patient chart
	Chief Complaints (Read Only)	Allows viewing chief complaints in the patient chart
	Clinical Overview	Allows opening the patients clinical overview
	DICOM Edit	Allows editing DICOM information within the QC and Exam Information tabs within the edit study screen
	Education Material	Allows opening the Educational Material tab in the edit study screen
	Follow Ups	Allows scheduling follow-up appointments in the Follow Up tab in the edit study screen
	Follow Ups (Read Only)	Allows viewing follow-up appointments on the Follow Up tab in the edit study screen
	Insurance Authorization	Allows adding and editing insurance authorizations for studies
	Medical History	Allows adding, editing, and updating patient medical histories
	Medical History (Read Only)	Allows viewing patient medical histories
	New Order	Allows creating new orders
	Notes	Allows entering study notes, patient notes, schedule notes, reasons for studies, and call log entries
	Notes (Read Only)	Allows viewing study notes, patient notes, schedule notes, reasons for studies, and call log entries
	Order Forms	Allows adding custom forms to orders from the Custom Forms tab in the edit study screen
	Order Forms (Read Only)	Allows viewing custom forms added to a study from the Custom Forms tab in the edit study screen

Category	Right	Description
	Order Images	Allows ordering images or reports from the Studies tab in the patient chart
	Order Summary	Allow opening the Summary tab in the edit study screen
	Ordering Physician Search	Allows using the magnifying glass to search the Provider Setup screen and NPPES website for an ordering physician to add to an order
	Quick Block	Allows creating a quick block (schedule block) from the schedule book
	Patient Demographics	Allows editing information in the Patient Information tab in the patient chart and edit study screen
	Priority	Allows assigning priority to the study from the worklist and in the Additional Information tab within the edit study screen
	Recent Schedules	Allows scheduling/copying appointments in the Recent Schedules screen if available for the facility
	Recent Schedules (Read Only)	Allows viewing appointments in the Recent Schedules screen if available for the facility
	Reference Document	Allows assigning a reference document to an order and providing it to the patient
	Referrals	Allows entering information for referrals to another provider
	Schedule Book	Allows viewing the schedule book
	Schedule in Non-working time slot	Allows scheduling appointments in non-working time slots from the schedule book
	Stat	Allows setting STAT levels for a study or order from the worklist
	Status Validation	Allows validating a study in the Validation screen when validation rules are set within the Study Status workflow
	Study CPT Update	Allows updating the CPT of a study
	Study Education Material	Allows opening the Educational Material tab in the edit study screen
	Teaching Study	Allows creating a DICOM teaching study from the worklist and within the viewer
	Transcription	Allows editing report transcriptions
	ExaTrans2 Multipanel	Allows using Exa Trans2 in the multi-panel, and using the multi-panel without Exa Trans2.
	Vehicle Assignments	Allows viewing the list of scheduled/dispatched vehicles in using Mobile Rad

Category	Right	Description
Setup	Appointment Types	Allows adding, editing, and deleting appointment types
	Body Parts	Allows adding and editing body part names
	Cognitive Status	Allows adding, editing, and deleting cognitive statuses
	СРТ	Allows manually adding, editing, and importing procedure codes
	Custom Forms	Allows adding, editing, and deleting custom forms, and attaching them to studies
	DB Totals	Allows using the DB Totals function
	DICOM Receiver Rule	Allows creating and managing DICOM receiver rules
	DM List	Allows viewing the DM Manager and list of DMs
	DM New	Allows creating a new view in the DM Manager
	EDI Translations	Allows creating and managing EDI translations
	Editor Template	Allows creating, editing, and deleting Editor templates
	EDI Rule	Allows creating and managing EDI rules
	Email Template	Allows creating and assigning email templates for the Confirmation screen
	Notification Templates	Allows creating and assigning templates sent to referring physicians
	Cover Sheets	Allows creating and assigning cover sheets for approved reports
	Exam Authorization	Allows opening the Exam Authorization tab
	Export Summary	Allows exporting summary totals
	Facility	Allows adding, editing, and deactivating facilities
	Market	Allows configuring regional markets
	Fee schedule	Allows creating and editing billing fee schedules and contracts
	Facility Fee Schedule	Allows creating a fee schedule based on facility and modality for the Fees by Facility and Modality report
	Provider Pay Schedule	Allows creating a pay schedule for radiologists, which is used in the Fees by Radiologist and Modality report
	Provider Location Information	Allows managing provider location information
	Form Builder	Allows creating and editing electronic study forms, and managing their attachment

Category	Right	Description
	Form Builder	Allows
	Functional Status	Allows adding, editing, and deleting functional statuses
	Gadgets	Allows adding, arranging, and viewing gadgets within the user's dashboard
	Hanging Protocol Groups	Allows editing DM (hanging protocol) settings for user groups, modalities, and other categories
	SR Report Queue	Allows opening the Structured Report Queue tab, which shows the status of outbound DICOM SRs
	Issuers	Allows adding and editing issuers of patient IDs
	ICD	Allows adding, reloading, and importing ICD, SNOWMED, and LOINC code files
	Insurance Provider	Allows adding, editing, and deleting insurance providers and assigning them to a facility
	Matching Rules	Allows creating rules for matching DICOM studies
	Macro Notes	Allows configuring macro notes
	Modality	Allows adding, editing, and reordering modality priority
	Modality Room	Allows adding and editing modality rooms
	Monthly Goals	Allows creating and editing monthly study count goals by modality for the Monthly Goals operational report
	No Show	Allows setting an appointment to a no-show status from the worklist and schedule book
	Ordering Facility	Allows adding and editing ordering facilities
	Patient Portal Log	Allows viewing Patient Portal activity
	POS Map	Allows creating and editing place of service mappings for POS codes, addresses, and mobile dispatching addresses
	Provider	Allows adding, editing, and importing resources such as referring providers, reading providers, and technologists
	Provider Group	Allows adding and editing groups of providers
	Queue	Allows viewing the status of outbound DICOM studies
	Rcopia Transactions	Allows viewing Rcopia transactions
	Report Template	Allows user to create and edit report headers for approved reports within the Report Template tab
	Report Queue	Allows resending and viewing the status of outbound emails and faxes such as approved reports, notifications, scanned documents, and study forms
	SR Report Queue	Allows opening the Structured Report Queue tab, which shows the status of outbound DICOM SRs

Category	Right	Description
	Transcription Template	Allows adding, editing, deleting, and associating templates with facilities, modalities, and study descriptions used for transcription
	Routing Rules	Allows creating routing rules for DICOM studies to send, print, or perform an HL7 action
	Schedule Block	Allows adding and editing schedule blocks that display on the schedule book and Find Slots screens
	Schedule Filter	Allows adding and editing filters of the schedule book
	Schedule Rules	Allows adding and editing individual rules within a schedule template
	Schedule Templates	Allows adding and editing scheduling templates
	Study Filter	Allows adding, editing, and deleting worklist study filters
	Update Global Study Filters	Allows updating global and shared worklist filters
	Study Flag	Allows adding and editing study flags
	Study Status	Allows adding study statuses and associating them with study flows
	Study Status - Read Only	Allows opening the Study Status tab to view study statuses and flows
	Templates	Allows adding and editing structured reporting templates
	Auto Suggestions	Allows adding and editing auto suggestions for structured reporting
	Keywords	Allows adding and editing keywords used for structured reporting
	Image Hotspots	Allows navigating through a cardiac US cine series
	SR Mapping	Allows adding and editing mappings of DICOM fields to structured reports
	Update URLs	Allows adding and updating Rcopia URLs
	Users Online	Allows viewing which users are currently logged on, and terminating connections
	Vaccines	Allows adding, editing, and marking the inactive vaccines list
	Vehicle Log	Allows opening the Vehicle Log tab in Log Setup
	Vehicle Registration	Allows adding and managing available vehicles to dispatch in Mobile Rad
	Vehicle Tracking	Allows viewing the location of a vehicle
	Locked Slots	Allows locking and unlocking slots (scheduling time ranges) for scheduling
	Insurance Provider Payer Type	Allows creating and editing payer type groups or categories that can be associated to insurance companies
	Provider Level Codes	Allows creating and editing provider level codes and percentages to associate with CPT codes, which are used in the Reading Provider Fees report

Category	Right	Description
	Portal Configurations (Read Only)	Allows viewing portal configuration settings.
	Portal Configurations	Allows configuring links to appear on the patient, provider, and attorney portals.
	NDC Codes	Allows configuring NDCs.
User Management	AD Groups	Allows adding Active Directory groups
Management	AD Users	Allows adding Active Directory users
	User	Allows managing individual user access to the system
	User Assigned Patients	Allows viewing the list of patients who are currently assigned to specific users
	User Assigned Studies	Allows viewing the list of studies that are currently assigned to specific users
	User Group	Allows creating, managing, and assigning document types and user roles to user groups
	User Role	Allows creating and managing user rights
	Copy Profile Settings	Allows copying profile settings from one user to another
	External Apps	Allows configuring Exa PACS/RIS to work with external applications
Viewer Options	Cardiogram Settings	Allows configuring cardiogram settings in Viewer Settings
Options	External Tools	Allows configuring options in the External Tools tab in Viewer Settings
	General Information	Allows configuring options in the General tab of Viewer Settings
	Interface Settings	Allows configuring options in the Interface tab of Viewer Settings
	Mammography Options	Allows configuring options in the Mammography tab of Viewer Settings
	Modality Options	Allows configuring options in the Interface tab of Viewer Settings
	Overlay Settings	Allows configuring options in the Overlays tab of Viewer Settings
	Tools Settings	Allows configure options in the Tools tab of Viewer Settings

Description of reports

Category	Report	Description
Billing/Report		
S	Aged AR Detail	AR aging by facility, responsible party, and payer by cutoff date and selected facilities, in detail
	Aged AR Summary	AR aging by facility, responsible party, and payer by cutoff date and selected facilities
	Charges	Charges for reconciling and reviewing the charges populated for any date of service
	Claim Activity	Detailed claim activity history by claim date range
	Claim Inquiry	All submitted claims, and order payments and balances
	Claim Transaction	All claims, and claim payments and balances
	Collections	Claims in the Collections Review status
	Credit Balance Encounters	Credit balance encounters
	Diagnosis Count	Aggregate diagnosis count by ICD code and facility, by order date range
	Modality Summary	Modality summary
	Monthly Recap	Monthly recap
	Patient Activity Statement	Patients and study face sheet in form
	Patient Statement	Patient statement
	Patients by Insurance	Patients seen within a date range by insurance
	Payer Mix	Payer mix
	Payments	Totals by payment and payer type, and how each charge line item is applied by accounting date range
	Payments by Insurance Company	Calculated payments to each insurance company, by patient
	Payments Realization Rate Analysis	Accounts with a zero balance
	Procedure Analysis by Insurance	Procedures by insurance
	Procedure Count	Number of procedures approved by radiologist fee schedule
	Reading Provider Fees	Reading provider fees
	Referring Provider Count	Referring provider count
	Referring Provider Summary	Referring doctor summary information
	Transaction Summary	Transaction summary

Category	Report	Description
Reports		Enables all rights in this category
	Audit Trail	Break the glass Audit Trail report
	Cancellation Reason	Statistics on canceled studies with cancellation reason as a key filtering criterion.
	Completed Schedules	Study details and patient information for completed studies in approved status
	Date of Service Payment Summary	Summary of payments collected for co-pay or time of service
	Export Completed Studies	CSV export of patient, study, and insurance details for completed or approved studies
	Export Peer Review	Progress and results of peer reviews performed
	Fees by Facility and Modality	Summary and breakdown of fees for a modality, by facility
	Fees by Radiologist and Modality	Summary and breakdown of fees for a modality, by radiologist
	Insurance Balance Aging	No longer available
	Insurance vs LOP	Aggregate study count by modality for insurance paid vs letter of protection/personal injury studies
	Marketing Rep Activities	Notes and activities that marketing representatives enter about referring physicians
	Marketing Rep Export	Study information, bill fees, and allowed amounts for referring physicians and marketing reps
	Modality Breakdown	Number of studies performed based on CPT or appointment type, by modality
	Monthly/Daily Study Goals	Number of studies performed in the month compared to the goal set in Monthly Goals Setup
	My Reports	Allows opening the My Reports tab to view operational reports
	Patients Worksheet	Patient and study face sheets in form
	Peer Review Operational	Progress and results of peer reviews performed
	Referrals Variance	Number of studies referred by referring physicians in the past 13 months, by facility, modality, and month

Category	Report	Description
	Referring Physician Study Count	Number of studies referred by referring physicians by date range
	Relative Value Units	CPT and RVU totals for reports signed off, by date range
	Report Filter	Allows opening the Daily Schedules report
	Report Filter	Allows applying filters to reports to create custom reports
	Report Provider	Number of studies tied to insurance VS LOP (Letter of Protection)
	Scheduler Activity	Number of orders (based on the current order status) by time of day that a user ordered, scheduled, rescheduled, or cancelled, by facility and date range
	STAT Tracking	Number of studies marked as STAT
	Studies Breakdown	Number of studies by facility, modality, study date, and study status
	Studies by Modality	Aggregate study count by facility, modality, study date, and study status
	Studies by Modality Room	Aggregate study count by facility and modality room
	Technologist Productivity	Number of studies performed per technologist by facility, modality, appointment type, and procedure code
	Transcription Study Count	Aggregate study count of reports transcribed by transcriptionists, by facility, modality, and study date
	Turnaround Time (TAT) - Calculated	Shows turnaround time (TAT) calculated based on selected date, type, and study's approved date, by date range, facilities, and/or ordering facilities
	Unfinished Studies	Studies not having selected study statuses, by facility and date range
	Unsigned Orders	Orders not signed by referring physician. No longer used.

Settings in the claim entry screen

The following table describes the settings shown in the Claim Creation screen.

Sub-Tab	Setting	Description
Charges	Date	Claim entry date, automatically assigned.
	Accession No.	Study accession number, automatically assigned.
	Service Description	Type-to-search or select by service code.
	Р1…Р4	Diagnosis pointers link the diagnosis code to a service. Type the first diagnosis pointer in P1, and then add additional pointers as necessary.

Sub-Tab	Setting	Description
	Units	Type the number of procedures of the selected CPT that were performed.
	Bill Fee	The pre-configured charge for the procedure. Edit as needed.
	Total Bill Fee	The bill fee multiplied by the units.
	Exclude	Select to exclude the charge from an invoice.
Claims	Study Date	Study date, automatically assigned.
	Facility Name	Select the name of the facility for scheduling purposes. It may or may not be the same as the service facility.
	Billing Provider	Select the provider issuing the invoice for the procedure.
	Rendering Provider	Select the provider who performed the procedure.
	Referring Provider	Select the referring provider.
	Encounter No.	Set to 1 automatically. Change if necessary.
	Service Facility	Select the facility where the procedure was performed.
	Diagnosis Codes	Select and add all relevant ICD diagnosis codes.
Insurance (Primary,	Existing Insurance	Select a previously configured insurance profile, if any.
Secondary, and Tertiary)	Carrier	Select the insurance carrier. The carrier's address and other information is filled in automatically.
	Address/Phone	Type the contact information.
	Health Number	Type the insurance card number.
	Group Number	Type the insurance group number.
	Coverage Start/End Date	Type the start and end dates of coverage, from the patient's insurance profile.
	Relationship	Select the relationship of the patient to the policy holder.
	Subscriber Name	Type the name of the policy holder.
	DOB	Select the date of birth of the policy holder.
	Gender	Select the gender of the policy holder.
	Address····	Type or select the address, city, state, and postal code of the policy holder.
Additional Info	Patient's Condition Is Related To:	Select a source of the condition if relevant for insurance purposes.

Sub-Tab	Setting	Description
	Accident State	If you selected a source previously, type the state/province in which the accident (source) occurred.
	Date of illness Onset, Injury/Accident, or Pregnancy (LMP)	Select the date of onset, accident, or first symptoms. In the Other Date box, enter additional dates related to the accident or injury, if needed.
	Dates Patient Unable to Work at Current Occupation	Select a date range in the From Date and To Date boxes.
	Hospitalization Patient Related to Current Services	Select a date range in which the patient was hospitalized, if relevant.
	Claim Notes	Enter notes for the claim. How different from Billing notes.
	Original Ref	The original reference number returned by Medicaid or Medicare if they are the primary payer. This number can be submitted to a secondary payer.
	Frequency	If you must submit a corrected claim to the insurance provider, use this field to code it as such.
Billing Summary	[Amounts]	Totals for fees charged, payments made, adjustments, claim balance, allowed amounts, other payments, and refunds.
	Claim Status	Select a claim status. You can use the status selected here for sorting in the Claims screen.
	Billing Notes	Type notes to appear in the Notes column of the Claims screen. This is different from Claim notes, which are submitted with the claim.
	Billing Codes	Select a pre-configured billing code to flag claims for your own specific purposes. See "Add codes and other basic data."
	Billing Class	Select a pre-configured billing class to flag claims for your own specific purposes. See "Add codes and other basic data."
	Responsible	Select the party responsible for payment.
Payments	Accounting Date	The entry date of the payment, assigned automatically.
	Payer Name	Select the payer.
	Pymt. Mode	Select the type of payment.

Sub-Tab	Setting	Description
	Check/Card No.	If the payment mode is "Check," type the check number.
	Apply	Select to apply the payment to the current claim.
	This Pay.	A reference value. Select the Apply button to enter payment information.
	This Adj.	A reference value. Select the Apply button to enter an adjustment amount.
	Payment ID	Automatically assigned serial number for the payment.
	NEW PAYMENT	Select to add a new payment.

Measurement accuracy limits

Measurement	Tools	Unit	Accuracy
Length	Ruler	mm	±2 mm
Angle	Protractor	0	±2°
Area	Calculated	cm^2	±5%
Ratio	Calculated		±2%

Viewer toolbar tools

The following table lists all toolbar tools that are available in the viewer. See corresponding topics for the functions of the tools.

Tool	Name	Function
U	3D Ray	Draws a 3D ray on an image. Select to place a vertex on one plane, and the ray extends through the image on all planes.
Ø	3D Cursor	Displays a cursor in other open planes that follows the motion of the cursor in the active plane.
3DA	3D Angle	Click three points to create the angle. The angle appears at the same coordinates on all series with the same frame of reference.
3DM	3D Measure	Click two points (or drag and click). The measurement appears at the same coordinates on all series with the same frame of reference.
3DP	3D Point	Click to add the point. The point appears at the same coordinates on all series with the same frame of reference.
3DR	3D ROI	Available in a future release.
AR	AR	Plots points to represent angular rotation.

Tool	Name	Function
1	Actual Image Size	Displays images in their real-life anatomical dimensions.
\triangleleft	Angle Marker	Measures and annotates an angle.
$\boldsymbol{\nvdash}$	Arrow	Draws an arrow.
	Auto W/L	Automatically optimizes the W/L.
1	Bone Enhance	Controls contrast between bone and other tissues.
1 • 1	Center Point	Click two points. The center point between them is indicated.
•	Change Slice Thickness	Sets the slice thickness.
0	Circle	Draws a circle.
CL	CLAHE	Contrast limited adaptive histogram equalization. Turns CLAHE mode on/off. Improves image contrast.
1	Cobb Angle	Measures a Cobb angle.
*	Context Menu	Displays the view shortcut.
† +	Context Tool	Displays a linked image at the same X, Y, Z angle as the current image.
14	CT Ratio	Displays the angle between two lines. Use to calculate the angle between vertebra.
\mathcal{C}	Curve	Click two points to estimate curvature from the center of the end vertebrae to the center of the apical vertebrae.
μł.	Cutlines	Shows/hides cutlines, if present.
k	Default	Selects the standard pointer tool.
2	Delete All Image Annotations	Deletes all annotations.
	Delete Series Annotations	Deletes all annotations in the current series. Available only in shortcut menu.
	Delete Study Annotations	Deletes all annotations in the current study. Available only in shortcut menu.
	Deselect Last Annotation	Deselects the last-selected annotation. Available only in shortcut menu.

Tool	Name	Function
DP	DICOM Print	Sends the image to a DICOM printer.
	DICOM Values	Displays a list of DICOM values associated with the current image.
DM	DM Settings	Opens display management settings.
•	Dot	Draws a dot.
2	Edit	Turns Edit mode on/off. Edit mode allows editing of previously set annotations.
\circ	Ellipse	Draws an ellipse.
	External Tools	Reserved for opening an external application.
55	Fit to Window	Restores original zoom level.
Δ	Flip	Flips the image across its horizontal or vertical axis (hover over the tool to select between axes).
	Frames	Selects the number and arrangement of frames to display in the viewing area.
ф	FH Measure	Takes freehand measurements.
Free ROI	Freehand ROI	Freehand-draws an ROI.
HG	Histogram	Displays a histogram.
\checkmark	HO Angle	Draws a HO angle.
—	Horizontal Line	Draws a horizontal line.
Hu	HU	Displays the pixel value in Hounsfield Units.
	Invert Color	Inverts black/white values.
©	L Marker	Adds an L (left) marker.
	Line	Draws a straight line.
℃ ^	Link Auto	Links two or more series that are open.
æ	Link Manual	Links user-specified frames between panels.

Tool	Name	Function
Н	M Compare	Measurement compare. Displays the distances from one hover over one or more other points.
•	Magnifying Glass	Displays a movable zoomed area.
1	Measure	Measures between two specified points.
MPR 🔻	MPR	Multiplanar reformation. Select to generate and display coronal, sagittal, and MIP (maximum intensity projection) stacks from an axial image.
1:1	One to One	Displays the image in its original DICOM size.
٢	Overlay	Turns overlays on/off.
<i>হ</i> ন্ট	Pan	Drags the image any direction.
D	Patient Documents	Opens an independent window for viewing, scanning in, and attaching patient documents. Turns blue when documents are available.
/	Pencil	Freehand-draws a line.
æ	Play Frames	Starts cine looping.
0	Print Images	Sends images to a non-DICOM printer.
R	Prior Reports	View reports. Turns blue when reports are available.
®	R Marker	Adds an R (right) marker.
+	Radial Angle	Draws a radial angle, which is the angle of the distal radial surface with respect to a line perpendicular to the shaft.
ŧ	Radial Length	Draws a radial length.
	Rectangle	Draws a rectangle.
C	Reset Frame	Undoes all unsaved changes to the image within the active viewing cell.
	Reset Linked Series	Removes any linkages.
$\langle\rangle\rangle$	Reset Stack	Restore images in a stack to their last-saved ordering.
$\overline{1}$	Reset Viewer	Reverts non-permanent modifications to images in the viewer (zoom, rotation, Window/Level etc.) to their original state.

Tool	Name	Function
ROI	ROI	Draws an ellipse to specify an ROI.
C	Rotate Right	Rotates the image 90 degrees clockwise. Hover over the rotate button to reveal the rotate left button.
C	Rotate Left	Rotates the image 90 degrees counterclockwise. Hover over the rotate button to reveal the rotate left button.
t	Save Annotations	Saves the current state of annotations.
	Scroll/Span Images	Switches between scrolling and spanning.
ткі	Set Key Image	Sets the current image as a key image.
٠	Settings	Displays the settings dialog.
Ρ	Show Prior List	Opens a dialog with a list of priors that you can select to display in the prior bar.
	Shutter	Adds an image shutter.
SHE	Shutter Ellipse	Draws an ellipse-shaped shutter.
SHF	Shutter Freehand	Draws a freehand shutter.
1	Spine Label	Adds vertebrae labels to spinal images.
1.	Spine Label Short	Adds vertebrae labels from common starting points.
2	Spine Label 3D	Adds vertebrae labels on all series with the same frame of reference.
1	Spine Label 3D Short	Adds vertebrae labels from common starting points on all series with the same frame of reference.
ッ	Spine Label Quick 3D	Adds vertebrae labels to the same anatomy on all series with the same frame of reference.
ン	Spine Label Quick 3D Short	Adds vertebrae labels from common starting points to the same anatomy on all series with same frame of reference.
N	Study Notes	Displays a dialog for reading/writing notes.
Т	Text	Draws text.
ТА	Toggle Annotations	Shows/hides annotations.

Tool	Name	Function
тво	Toggle DICOM Overlays	Shows/hides DICOM overlays.
т	Transcription	Opens an independent dictation and transcription window.
	Triangulation	Displays the context tool at the same coordinates on all series with the same frame of reference.
UNQ	Unq	Creates a teaching study.
1	Vertical Line	Draws a vertical line.
(Ö)	Window/Level	Adjusts the window/level.
Q	Zoom	Zooms the image in/out.

Install and configure tools

Add the Chrome extension

You can add an extension that enables your Chrome browser to work with multiple monitors. After adding the extension, you can configure display settings for the monitors you will use.

- 1. On the burger 🔲 menu, on the **TOOLS** submenu, select **CHROME EXTENSION**.
- On the Chrome_MultiMonitor page, select Add to Chrome.
 Note: If the 'Add Chrome_Multimonitor? message appears, select Add extension.
- 3. On the worklist, on the upper toolbar, select the settings button, and then in the button shortcut menu, select **Viewer Settings**.

Monitors on System

CO

- 4. On the **GENERAL** tab, under **Display Settings**:
 - a. Select the Monitors on System box
 - b. Select the refresh \bigcirc button

3

- c. Select the identify ⁽²⁾ button.
- 5. In the table of monitors:
 - a. In the **Monitor** column, select all monitors that you want to use.
 - b. In the **Current** column, select the monitor to hang current images and thumbnails.
 - c. In the **Prior** column, select the monitor to hang prior images and thumbnails.

Note: When using a hanging protocol, the Current and Prior settings in the table only control where the thumbnails hang.

- 6. Optional. In the **Orders** column, select an item to auto-open in the monitor.
- 7. Select **SAVE**.

Install Exa Trans

Radiologists who use Dragon for transcription must install Exa Trans.

1. On the burger amenu, on the **TOOLS** submenu, select **EXA TRANS**. **Note**: Chrome downloads ExaTransSetup.msi in the lower left corner of the browser. Wait until the download is finished before continuing.

 Select ExaTransSetup.msi. Windows installs Exa Trans. Note: If the Windows protected your PC dialog appears, select More info, and then select Run anyway.

Install Exa Dictation

Radiologists who use Dragon for dictation must install Exa Dictation.

- On the burger menu, on the **TOOLS** submenu, select **EXA DICTATION**.
 Note: Chrome downloads exa_dictation_setup.msi in the lower left corner of the browser. Wait until the download is finished before continuing.
- 2. Select exa_dictation_setup.msi.
- Windows installs Exa Dictation.
 Note: If the Windows protected your PC dialog appears, select More info, and then select Run anyway.

Install OPAL tools

Many functions in Exa PACS/RIS require that you first install OPAL tools, such as CD import and CD burning.

- On the burger menu, on the **TOOLS** submenu, select **OPAL TOOLS**.
 Note: Chrome downloads OpalToolsSETUP.exe in the lower left corner of the browser. Wait until the download is finished before continuing.
- Select OpalToolsSETUP.exe. Windows installs Opal tools.
 Note: If the User Account Control dialog appears, select Yes.

Install OPAL Viewer

Exa PACS/RIS uses a server-side viewer, but you can also install the client-side Opal viewer.

- On the burger menu, on the **TOOLS** submenu, select **OPAL VIEWER**.
 Note: Chrome downloads ExaClientViewerSETUP.exe in the lower left corner of the browser. Wait until the download is finished before continuing.
- Select ExaClientViewerSETUP.exe. Windows installs the Opal viewer. Note: If the Windows protected your PC dialog appears, select More info, and then select Run anyway.

Install Exa Scans

Exa Scans enables you to scan paper and other media and attach the scans to studies as DICOM data. **Prerequisites**: You must uninstall any existing version of Exa Scans before installing a new one.

- 1. On the burger menu, on the **TOOLS** submenu, select **EXA SCANS**. Chrome downloads exa_docscan_setup.msi in the lower left corner of the browser. Wait until the download is complete before continuing.
- Select exa_docscan_setup.msi.
 Note: If the Windows protected your PC dialog appears, select More info, and then select Run anyway.
- 3. In the Welcome to the EXA Document Scan Setup Wizard, select Next.
- 4. On the End User License Agreement page, select I accept the terms in the License Agreement checkbox, and then select Next.
- 5. On the **Destination Folder** page, select **Next**.
- 6. On the Ready to Install EXA Document Scan page, select Install.
- 7. If the User Account Control dialog appears, select Yes.
- 8. On the Completed the EXA Document Scan Setup Wizard page, select Finish.

Install Exa Launch

Exa Launch is a background application that prepares studies to be opened by third-party applications such as PenRad, PowerScribe 360, and MModal.

- 1. On the burger menu, on the **TOOLS** submenu, select **EXA LAUNCH**. Chrome downloads ExaLaunchExtApp.msi in the lower left corner of the browser.
- 2. Wait until the download is complete, and then select ExaLaunchExaApp.msi.
- 3. If the UAC prompt appears, select **YES**.

Install Exa Tool

Exa Tool is a client side background application that enables opening studies in OrthoView. **Prerequisite**: Install local cache (see "Install local cache").

- 1. On the burger 🔲 menu, on the **TOOLS** submenu, select **EXA TOOL**.
- 2. Wait until the download is complete, and then run **exa_tool_setup.msi**.
- 3. Follow the on-screen prompts.

Install local cache

Local cache is a service that manages the copying of studies from the server to your local workstation for local use.

Configure the <u>server</u>

- 1. On the burger 🔲 menu, select **SETUP**.
- 2. Next to the burger button, select the word in all caps, and then select **DICOM.**
- 3. On the **AE Title** tab, select **Add**, and then enter the following settings.

АЕ Туре	Local Cache
AE Title (Remote)	[Name with no spaces]
Description	[Friendly descriptive name]

4. Select SAVE.

Configure the <u>cli</u>ent

- On the burger menu, on the TOOLS submenu, select CLIENT SERVICE.
 Result: Your browser downloads exa_localcache_setup.msi to its specified folder for downloads (usually the Windows Downloads folder).
- 2. Run exa_localcache_setup.msi and follow the prompts to install it.
- 3. In the Exa PACS/RIS worklist, select **Settings** and select **Local Service Settings**.
- 4. In the Rendering Options screen, under Prefetch Configuration, enter the following settings.

Target	Shortcut
AE Title	Type the AE Title (Remote) name that you created in "Configure the server."
User Name	Type a user name with user rights to access studies on the server.
API URL	Type the address of the server hosting the studies that you want to locally cache.
Debug Mode	Select to add additional troubleshooting information to logs.
Disable Oncall	Leave cleared.

5. In the Rendering Options screen, under General Configuration, enter the following settings


Target	Shortcut
API Timeout	Type the number of seconds to keep the connection to the server open.
Study Timeout	Type the number of hours to keep the imageservice/study thread open.
Prefetch Interval	Type the number of minutes keep to studies in the send queue.
Cache Timeout	Type the number of days to keep locally cached studies before purging.
Cache Directory	Type the fully qualified path to the local cache (default = c:\viztek\exa\cache\localcache)
Study Count	Type the maximum number of studies to keep in local cache.
RAM Usage	Type the maximum number of megabytes of RAM to use for prefetching and local rendering.
Max Threads	Type the number of simultaneous threads available to download studies.
Parallel Prefetch	Leave blank.
Cache Disk Usage	Move the slider to set the maximum percentage of hard disk to use for prefetching and local rendering.
Oncall Interval	Type the number of minutes to elapse before checking for new studies to prefetch.
Prefetch Priors	Select to include priors when prefetching.
Enable Skinline Detection	Select to enable Skinline Detection when viewing prefetched studies.

6. Select **ACTIVATE**.

Add a trusted IP or URL

If access to an external server is needed to access to third-party apps, add the IP address or URL of the external server to a list of trusted resources as follows.

- 1. On the Exa PACS/RIS server, use File Explorer to navigate to the ...web\config directory.
- 2. In Notepad, open the express.js file.
- 3. In the **app.use(helmet.contentSecurityPolicy({** area, under **scriptSrc**, add the IP or URL as in the example in the following figure.

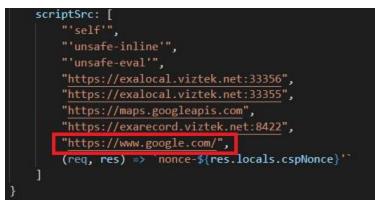

4. In **Control Panel**, select **Administrative Tools**, and then double-click **Services**.

- 5. In the list of services, select **exa_web**.
- 6. Use the toolbar to **stop**, and then **start** the service.